Print / Save as PDF



# Iris Eyelid

Iris Surface Mounted Bulkhead Eyelid IP65 22W 4000K Black

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R181701/22W/BK/EY** |
| **Applications** | **Interior / Exterior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS |

## PHYSICAL DATA

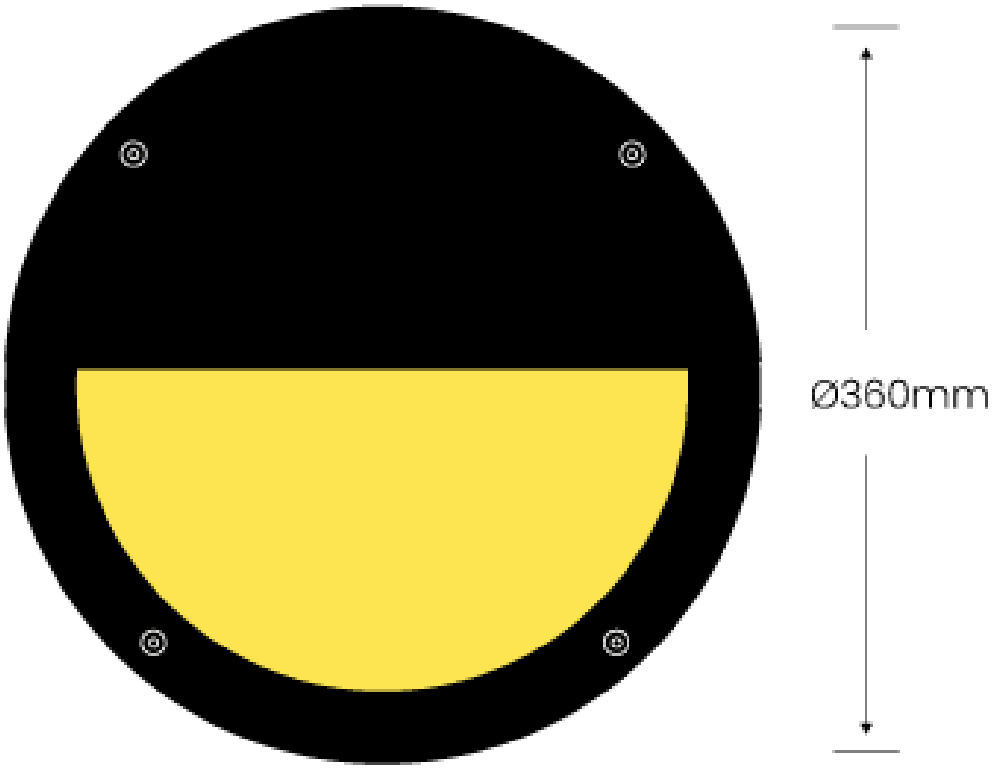
| | |
|---|---|
| **Colour Finish** | Black (RAL 9005) |
| **Body Colour** | Black (RAL 9005) |
| **Dimensions (mm)** | Ø360 x H94 |
| **Luminaire Fixing** | **Surface mounted** |
| **Construction Material** | Cast aluminium |
| **Diffuser Type** | TP(a) rated |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 22W |
| **Voltage Range** | AC220-240V |
| **Power Factor** | >0.95 |
| **Inrush Current** | <60A |
| **Running Current** | DC700mA |

## DIMENSION DIAGRAM


94mm


Ø360mm

**Part Code: R181701/22W/BK/EY**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 1910 |
| **Efficacy** | ~87 Lm/W |
| **Operating Temperature** | 0°C to +40°C |
| **Beam Angle** | 120° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP65 |
| **IK Rating** | IK09 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **4000K** |
| **CRI** | >85Ra |
| **Macadam Ellipse** | Equal or less than 4 sdcm |
| **L80 B50** | **50000 hours** |
| **LEDs** | Epistar (2-3 bin) |

## PHOTOMETRIC DIAGRAM

*Image not available*