Print / Save as PDF



Iris Eyelid

Iris Surface Mounted Bulkhead Eyelid IP65 22W 4000K Black Emergency

PRODUCT DATA

Part Code (s)	**R181701/22W/BK/EY/E**
Applications	**Interior / Exterior**
Warranty	5 years
Certification(s)	CE, RoHS

PHYSICAL DATA

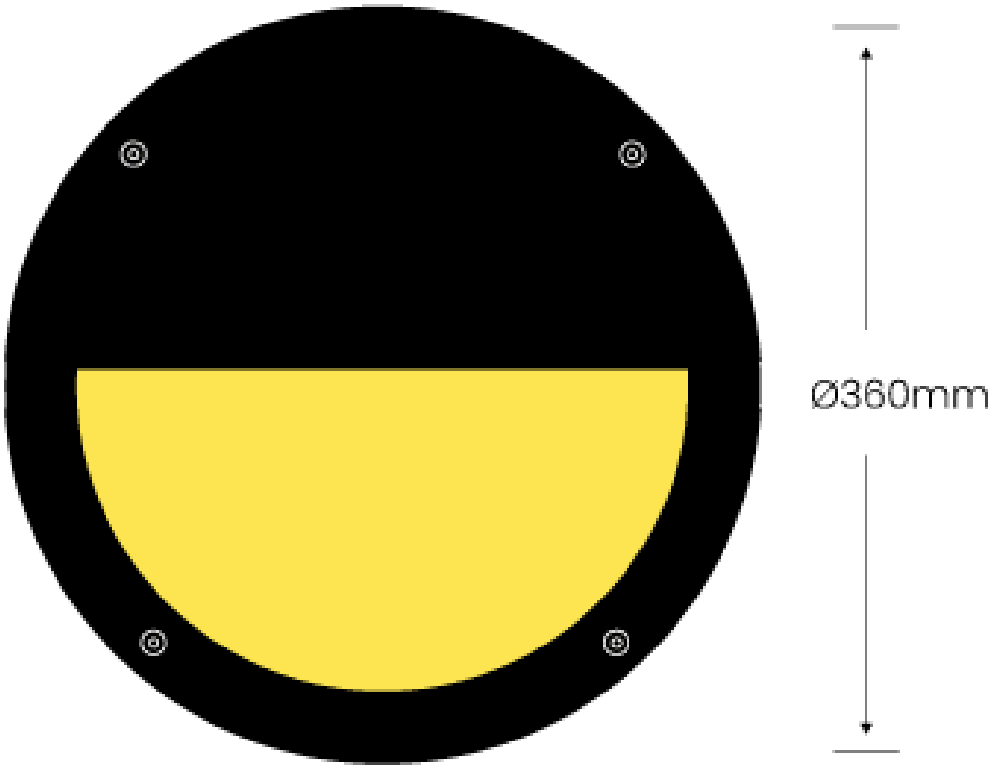
Colour Finish	Black (RAL 9005)
Body Colour	Black (RAL 9005)
Dimensions (mm)	Ø360 x H94
Luminaire Fixing	**Surface mounted**
Construction Material	Cast aluminium
Diffuser Type	TP(a) rated

ELECTRICAL DATA

Wattage	22W
Voltage Range	AC220-240V
Power Factor	>0.95
Inrush Current	<60A
Running Current	DC700mA

DIMENSION DIAGRAM


94mm


Ø360mm

Part Code: R181701/22W/BK/EY/E

TECHNICAL DATA

Lumens (±5%)	191 (Emergency Mode)
Efficacy	~87 Lm/W
Operating Temperature	0°C to +40°C
Beam Angle	120°
Operating Hours	>50000
IP Rating	IP65
IK Rating	IK09

LIGHT SOURCE DATA

Kelvins	**4000K**
CRI	>85Ra
Macadam Ellipse	Equal or less than 4 sdcm
L80 B50	**50000 hours**
LEDs	Epistar (2-3 bin)

PHOTOMETRIC DIAGRAM

Image not available