

RICOMAN[®]

Pulsar LED Pendant INSTALLATION INSTRUCTIONS



**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE
A COPY WITH THE END USER FOR FUTURE REFERENCE.**

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.


It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES

- Ensure the supplied LED driver is used to connect to the AC input.
- Ensure the supplied screws are suitable for the specific ceiling.
- Do not disassemble or amend the structure of the luminaire as this can be dangerous and it would void your warranty.
- The luminaire must be installed on a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.
- The luminaire must not be installed above hot objects such as ovens to avoid damage to the fitting.
- Ensure that ALL electrical connections are tight with no loose strands.

SPECIFICATION & DIMENSIONS

Part Code: R096201
Wattage: 10W
Power Supply: AC200-240V
Power Factor: >0.90
CCT: 4000K
CRI: >90Ra

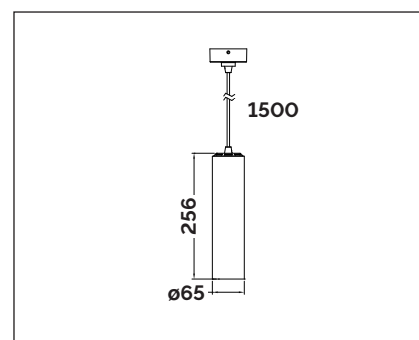


Pulsar LED Pendant

INSTALLATION STEPS


Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.

STEP 1

Unscrew the anti-vandal screw from the base. Ensure power is turned off and remove the base by rotating anti-clockwise.




STEP 2

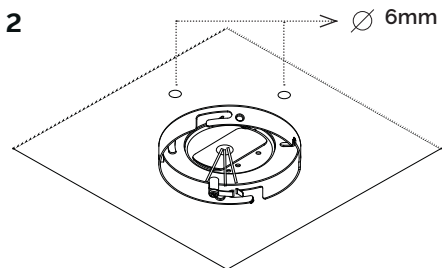

Feed mains power through the entry hole. Then, drill two holes of 6mm diameter into the ceiling according to the position of the base.


STEP 3

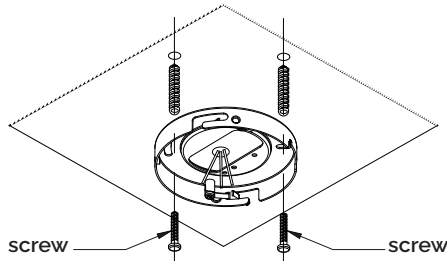

Fix the base on the ceiling using the screws supplied in the package, or (if not suitable) any screws that are suitable for the specific ceiling.


STEP 4

Connect the AC power to the connectors.

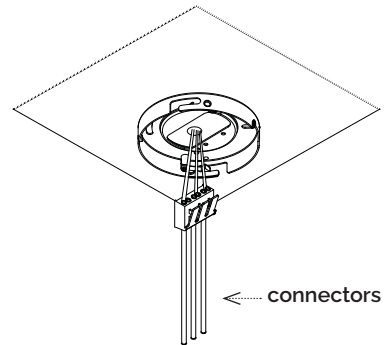


STEP 5

Align the driver box to the counterpoint and rotate clock-wise to fix onto the base. Screw the anti-vandal screw back into the base.

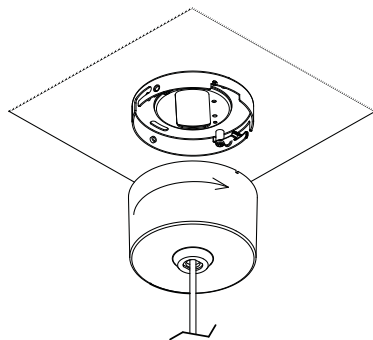

STEP 6

Installation complete.

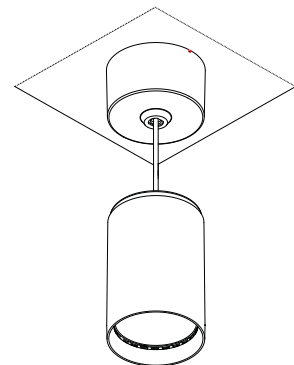

ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.