


RICOMAN[®]

MODUS 2.0 CIRCULAR LED DOWNLIGHT

INSTALLATION INSTRUCTIONS



PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE A COPY WITH THE END USER FOR FUTURE REFERENCE.

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.

This product is a CLASS I Fitting and must be connected to earth termination.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES

- Do not disassemble or amend the structure of the luminaire as this can be dangerous and it would void your warranty.
- Electrostatic Sensitive Devices (ESD): to be handled with precaution to avoid ESD
- The luminaire must be installed on a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.
- The luminaire must not be installed above hot objects such as ovens to avoid damage to the fitting.
- Ensure that ALL electrical connections are tight with no loose strands.

AFTER INSTALLATION & MAINTENANCE

- Avoid looking directly to the LEDs to avoid dazzling and eye strain.
- Do not use chemicals and abrasives to clean this product. Wipe with a soft cloth only to avoid scratching.

SPECIFICATION & DIMENSIONS

Product Code: R096920/CTC/14-28W

Wattage: 14W & 28W Switchable

Power Supply: AC220-240V

Power Factor: >0.90

Lumens: 117Lm/W Switchable


CCT: 3000K & 4000K

CRI: >90Ra

Driver: Internal

Body: Aluminium body/Glass diffuser

Installation: Surface Mounted | Pendant

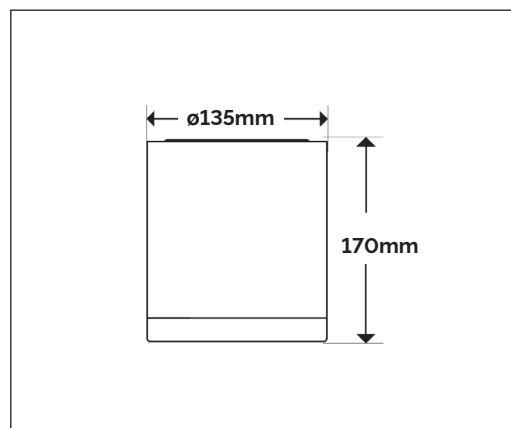


Modus 2.0 LED Surface Mounted

INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.


STEP 1

Unscrew the fitting as shown and detach the mounting bracket.

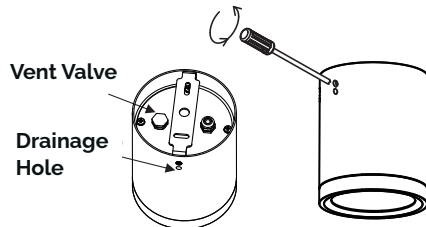


STEP 2

Place the mounting bracket on the ceiling and drill two holes $\varnothing 6\text{mm}$

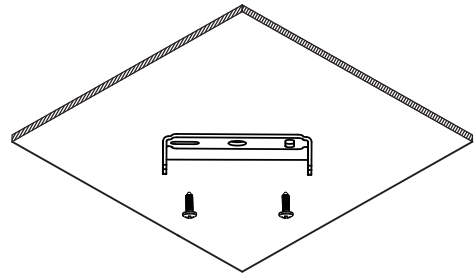


STEP 3

Pull the wire out and fix the bracket by tightening the self-tapping screw with a screwdriver.

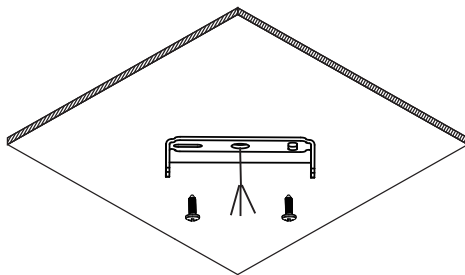


STEP 4

Connect the cables as shown.

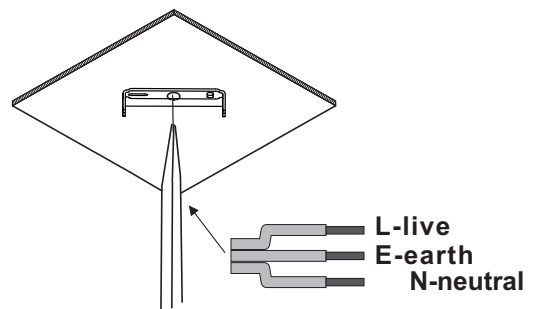


STEP 5

Secure the light fitting onto the mounting bracket.



STEP 6

Tighten the screw. Installation complete.

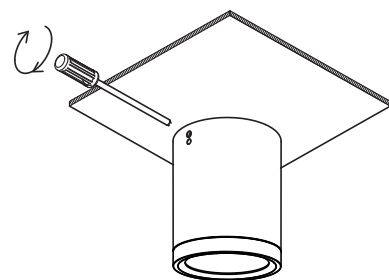


Modus 2.0 LED Pendant

INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.


STEP 1

Open the bottom cover by unscrewing.




STEP 2

Place the bottom cover on the ceiling and drill two holes $\varnothing 6\text{mm}$.

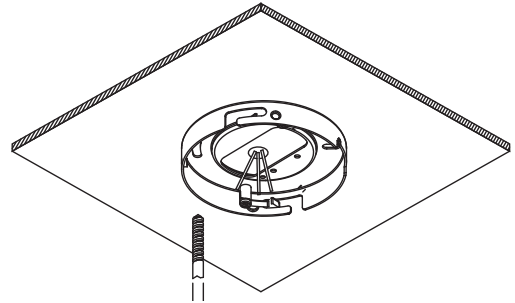


STEP 3

Secure the screw to fix the bottom cover on the ceiling.

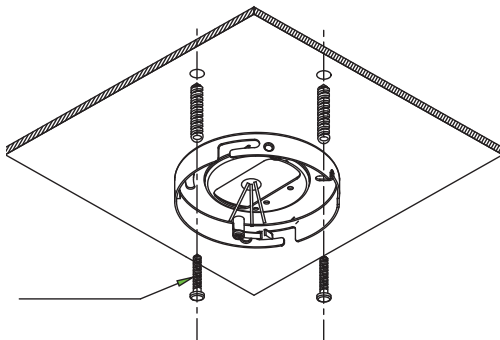


STEP 4

Connect the cables as shown.

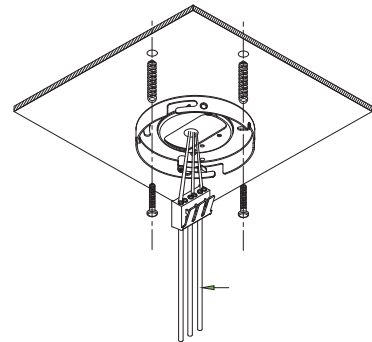


STEP 5

Secure the driver into the bottom cover and turn clockwise to fix the luminaire on the bottom cover.



STEP 6

Installation complete.

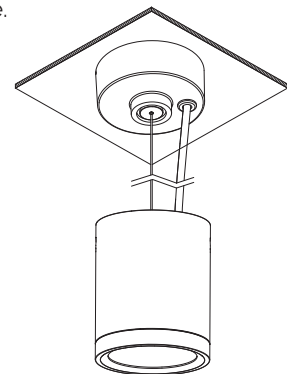

ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.