Print / Save as PDF

Astrowave

Astrowave 3000K Side Entry

PRODUCT DATA

Part Code (s)	**R751000/3K/SE**
Applications	**Interior**
Warranty	5 years
Certification(s)	CE, RoHS , UKCA

PHYSICAL DATA

Colour Finish	White end cap
Dimensions (mm)	Up to 5m length, 25mm diameter
Luminaire Fixing	**Surface Mounted, Suspended (vertically, horizontally)**
Construction Material	Silicone
Diffuser Type	Silicone

ELECTRICAL DATA

Wattage	14.4W/M
Voltage Range	D24V
Inrush Current	n/a
Running Current	0.6Am

DIMENSION DIAGRAM

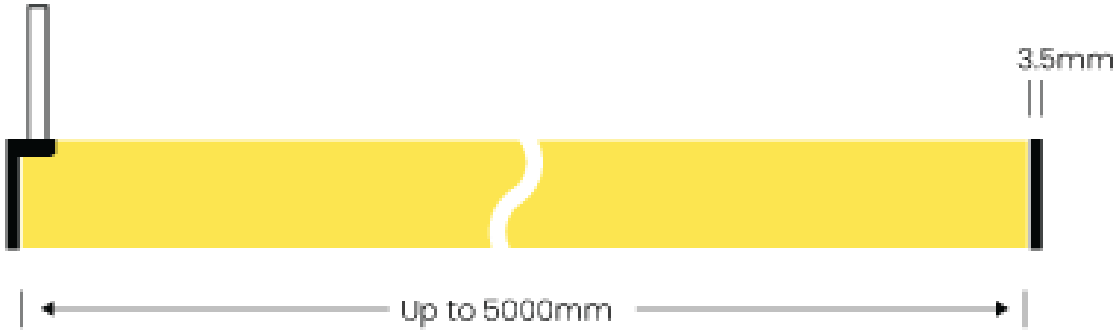
3.5mm
Up to 5000mm

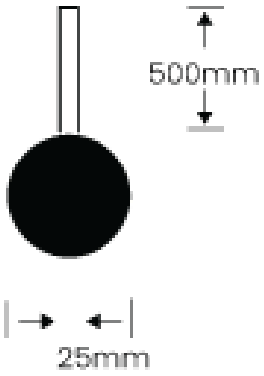
500mm
25mm

Part Code: R751000/3K/SE

TECHNICAL DATA

Lumens (±5%)	950Lm/M
Efficacy	~68Lm/W
Operating Temperature	-20°C to +40°C
Beam Angle	360°
Operating Hours	>36000
IP Rating	IP65
IK Rating	IK08

LIGHT SOURCE DATA

Kelvins	**3000K**
CRI	>90Ra

PHOTOMETRIC DIAGRAM

Image not available

ricoman.com Product design and technical data may be subject to change.

0161 451 5913 sales@ricoman.com