Print / Save as PDF



# Astrowave

Astrowave 4000K Side Entry

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R751000/4K/SE** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS , UKCA |

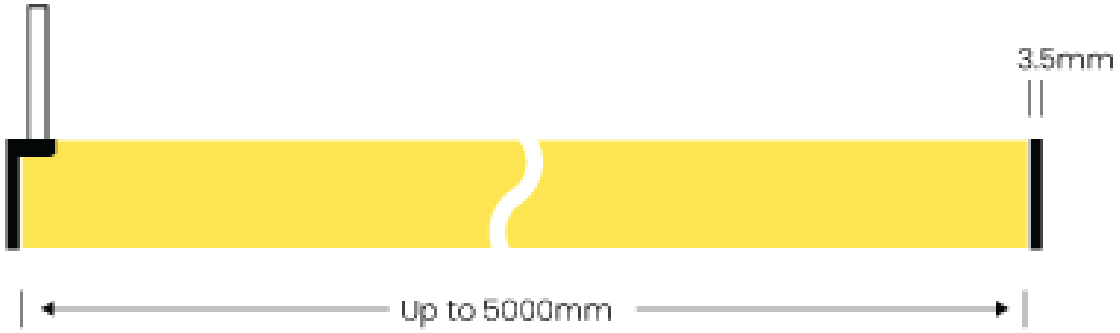
## PHYSICAL DATA

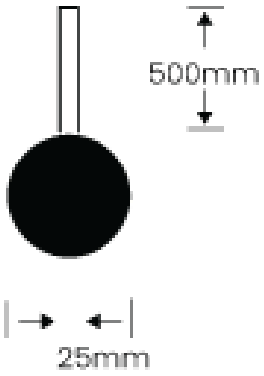
| | |
|---|---|
| **Colour Finish** | White end cap |
| **Dimensions (mm)** | Up to 5m length, 25mm diameter |
| **Luminaire Fixing** | **Surface Mounted, Suspended (vertically, horizontally)** |
| **Construction Material** | Silicone |
| **Diffuser Type** | Silicone |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 14.4W/M |
| **Voltage Range** | D24V |
| **Inrush Current** | n/a |
| **Running Current** | 0.6Am |

## DIMENSION DIAGRAM


3.5mm
Up to 5000mm


500mm
25mm

**Part Code: R751000/4K/SE**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 950Lm/M |
| **Efficacy** | ~68Lm/W |
| **Operating Temperature** | -20°C to +40°C |
| **Beam Angle** | 360° |
| **Operating Hours** | >36000 |
| **IP Rating** | IP65 |
| **IK Rating** | IK08 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **4000K** |
| **CRI** | >90Ra |

## PHOTOMETRIC DIAGRAM

*Image not available*