


Z10 Emergency Pack

SPECIFICATION DOCUMENT

RICOMAN®

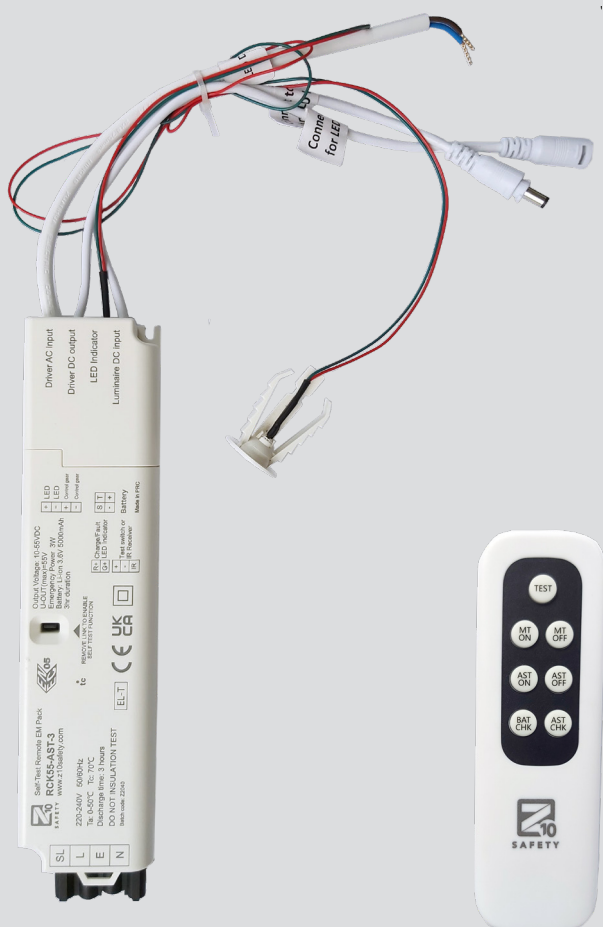

5 YR
WARRANTY

Overview

Remote/integral emergency conversion pack. It offers 3 hour of emergency lighting with optional self-test function and remote control testing. All the user needs to do is Walk around a building, point and press the remote at any luminaire to check the emergency function.

Power: **3W**

Compatible:


- RICOMAN Downlights
- RICOMAN Panel Lights
- RICOMAN Surface Lights
- RICOMAN Linear Lights

UK
CA

CE

RoHS

Technical Drawings

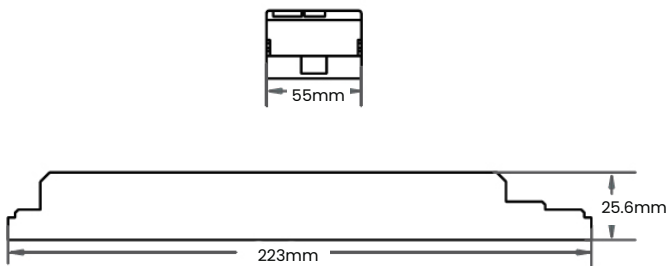

RICOMAN Z10 Compatible Luminaires

REMOTE

R10-03E(SM)/Z10

- Centorio Tunable Downlight
- Venus Downlight
- Capella Downlight
- Carina Downlight
- Ultra-Slim Downlights
- Endor >12W versions
- Sirius Downlight
- Protium Downlight
- Saturn Downlight
- Vela Recessed Wallwasher

R10-03E(DC)/Z10

- Pure Panel
- Core Plus & UGR Panel
- Verve Panel
- Aquavance IP66 Panel
- Fusion
- Luna
- O2 Modular

INTEGRAL

/E-Z10

- MiniMoon Pendant
- Estrella Linear
- Estrella Pro Linear
- Academy Curved Linear
- Alphard Round Bulkhead
- Alphard Square Bulkhead
- Salus ExitBulkhead
- Iris Bulkhead
- Victus Bulkhead
- Trident Anti-Corrosive
- Orion Batten

Details

Applications	Interior
Construction Material	Polycarbonate
IP Rating	IP20
IK Rating	IK07
Warranty	5 years
Weight (kg)	0.40
Voltage Range	AC220-240VAC
Max Output Voltage	55 Vdc
Standby Power	<0.8W
LED Forward Voltage Range	10-50 Vdc
Protection Class IEC	Class II
Max Ambient Temperature	0°C to +40°C
Max. Battery Temperature	60°C
Battery	18650 * Li-ion
Battery Duration	3 hours
Battery Charging Time	<16 hrs (integral) Up to 8 hrs (remote)

Product Codes & Specifications

Code	Option
R10-03E(SM)/Z10	Remote emergency pack (downlights)
R10-03E(DC)/Z10	Remote emergency pack (panel lights)
/E-Z10 (as suffix)	Integral emergency pack
R10-Z10	Emergency remote control