Print / Save as PDF



# E-Pro Track

E-Pro Track Mounted 16W 2x2 Cells White Finish 4000K

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R111722/WT/4K/16W** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS, UKCA |

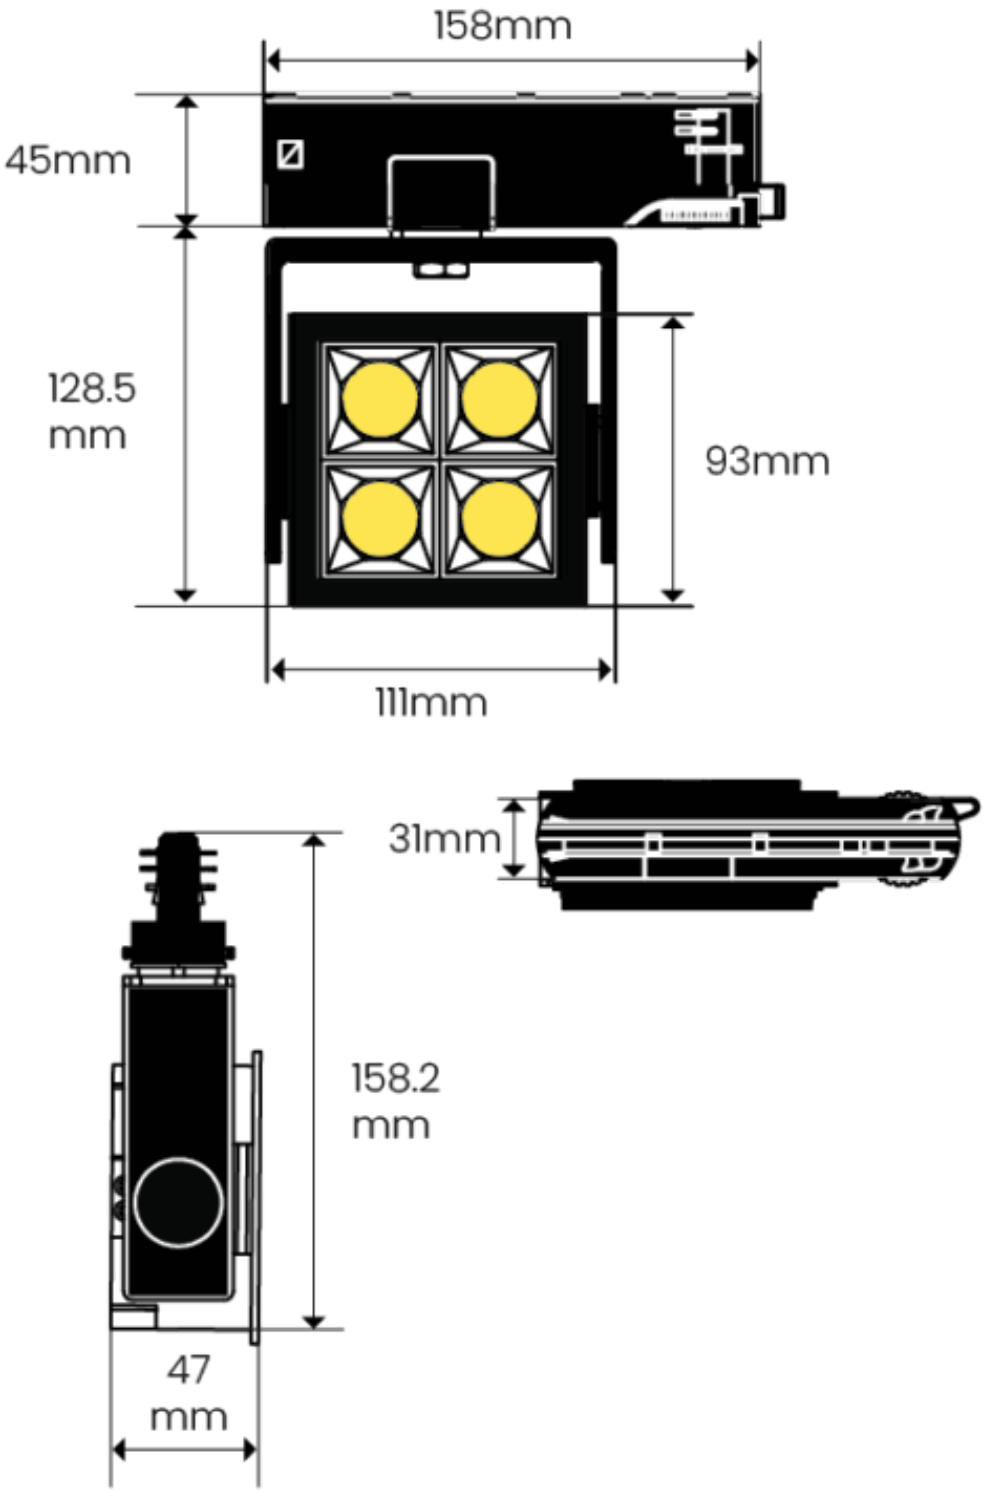
## PHYSICAL DATA

| | |
|---|---|
| **Colour Finish** | Matte White (RAL9016) |
| **Body Colour** | White |
| **Dimensions (mm)** | L111 x H93 x D47mm |
| **Luminaire Fixing** | **Track Mounted** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | Polycarbonate TPa Rated (Round Aperture) |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 16W |
| **Voltage Range** | AC200-240V |
| **Power Factor** | >0.90 |
| **Inrush Current** | <10A |
| **Running Current** | 700mA |

## DIMENSION DIAGRAM


158mm
45mm
128.5
mm
93mm
111mm
31mm
158.2
mm
47
mm

**Part Code: R111722/WT/4K/16W**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 1580 |
| **Efficacy** | ~99 Lm/W |
| **Operating Temperature** | -20°C to +45°C |
| **Beam Angle** | 50° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP40 |
| **IK Rating** | IK07 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **4000K** |
| **CRI** | >90Ra |
| **Macadam Ellipse** | equal or less than 3 sdcm |
| **L80 B50** | **90000 hours** |
| **LEDs** | CREE 5050 |

## PHOTOMETRIC DIAGRAM

*Image not available*