Print / Save as PDF



# Janus

Janus Twin Spot 6500K Manual test Emergency Light

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R221652/MT** |
| **Applications** | **Interior/Exterior** |
| **Warranty** | 3 years |
| **Certification(s)** | CE, RoHS |

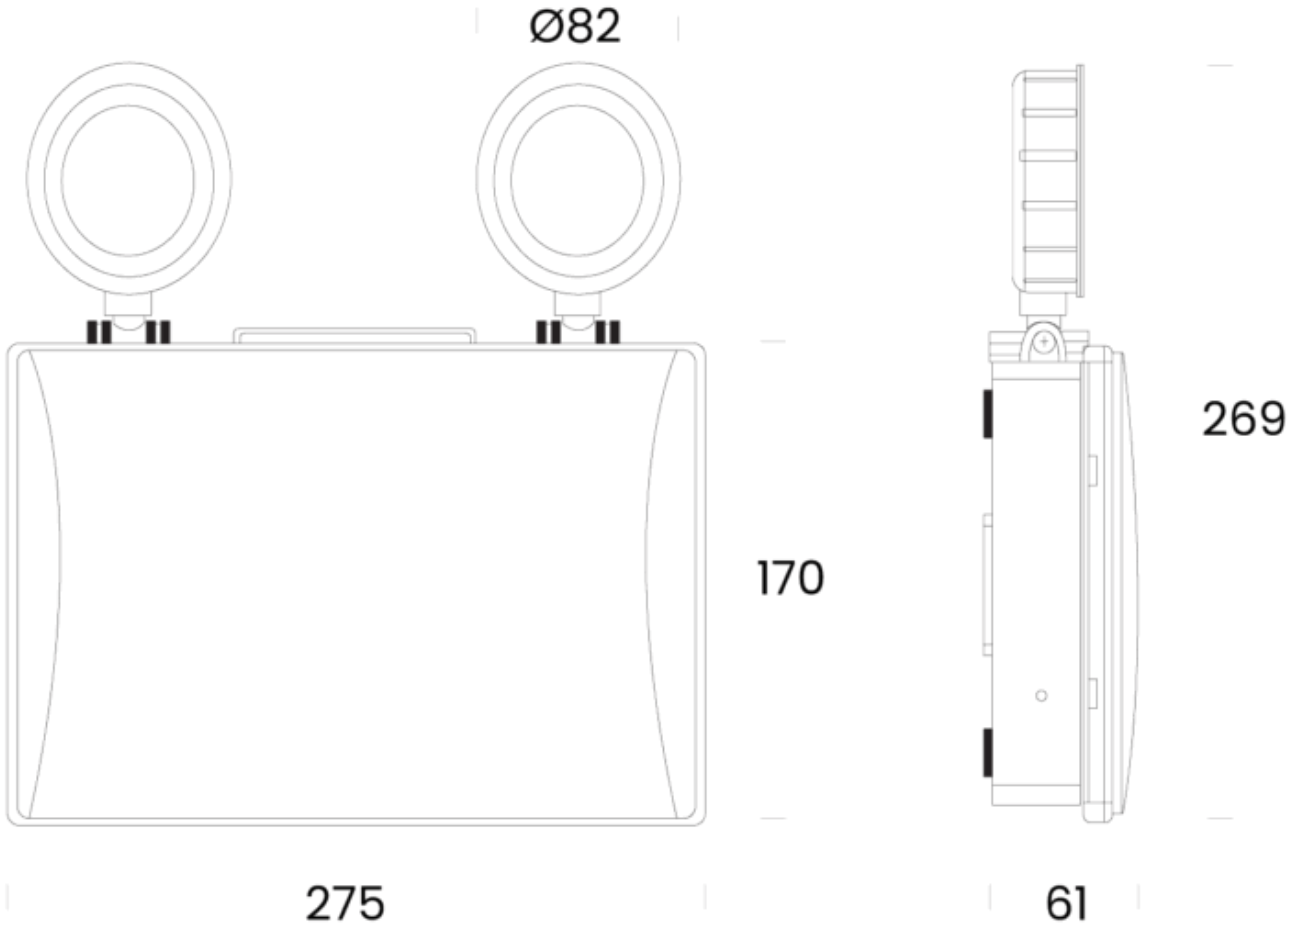
## PHYSICAL DATA

| | |
|---|---|
| **Colour Finish** | White |
| **Body Colour** | White |
| **Dimensions (mm)** | W275 x H269 x 61 |
| **Luminaire Fixing** | **Surface Mounted / Suspended** |
| **Construction Material** | Polycarbonate |
| **Diffuser Type** | Polycarbonate |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 2.5W |
| **Voltage Range** | 220-240V |
| **Power Factor** | >0.4 |
| **Inrush Current** | 3.95A 100us |
| **Running Current** | 24mA |

## DIMENSION DIAGRAM


Ø82
170
269
275
61

**Part Code: R221652/MT**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 300 (x2) |
| **Efficacy** | 120Lm (x2) |
| **Operating Temperature** | 5oC to +45oC |
| **Beam Angle** | 120° |
| **Operating Hours** | 30,000 |
| **IP Rating** | IP20 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **6500K** |
| **CRI** | >80 Ra |

## PHOTOMETRIC DIAGRAM

*Image not available*