Print / Save as PDF



Core Downlight

Core Fire Rated Switchable 3000K or 4000K dimmable integrated downlight

PRODUCT DATA

Part Code (s)	**R098900**
Applications	**Interior**
Warranty	5 years
Certification(s)	CE, RoHS


PHYSICAL DATA


Colour Finish	White (Standard), Black, Chrome
Dimensions (mm)	Ø84 x H53
Luminaire Fixing	**Recessed**
Construction Material	Polycarbonate
Diffuser Type	Polycarbonate (TP(a) Rated

ELECTRICAL DATA

Wattage	6W
Voltage Range	AC220-240
Power Factor	>0.90
Inrush Current	<30A
Running Current	DC71mA

DIMENSION DIAGRAM

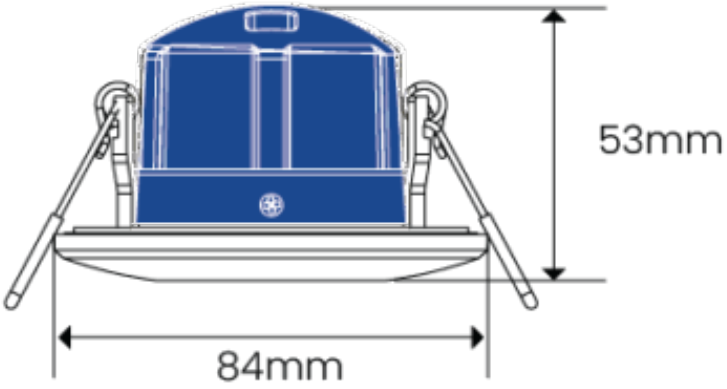
53mm
84mm

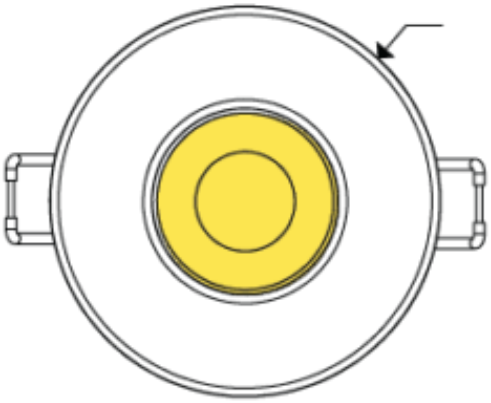


70mm

Part Code: R098900

TECHNICAL DATA

Lumens (±5%)	600
Efficacy	~100Lm/W
Operating Temperature	-20°C to +45°C
Operating Hours	>50000
IK Rating	IK08

LIGHT SOURCE DATA

CRI	>85Ra
Macadam Ellipse	equal or less than 4 sdcm
LEDs	Epistar

PHOTOMETRIC DIAGRAM

