Print / Save as PDF



# Modus Max

Modus Max IP65 Suspended Downlight 150W 3000K

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R096950/3K/150W** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS |

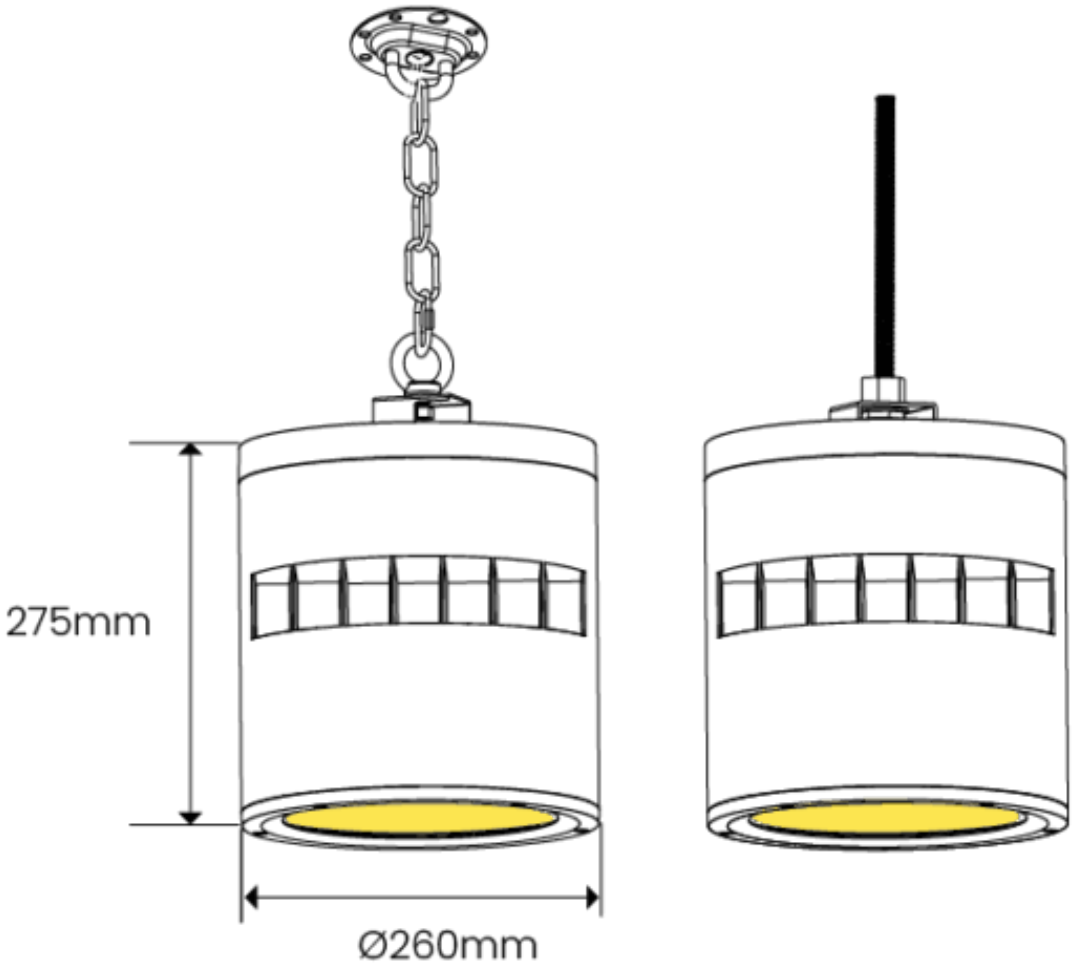
## PHYSICAL DATA

| | |
|---|---|
| **Colour Finish** | White |
| **Dimensions (mm)** | Ø260 x H275mm |
| **Luminaire Fixing** | **Surface Mounted, Pendant** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | Glass |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 150W |
| **Voltage Range** | AC220-240V |
| **Power Factor** | >0.95 |
| **Inrush Current** | <60A |
| **Running Current** | DC4A |

## DIMENSION DIAGRAM


275mm
Ø260mm

**Part Code: R096950/3K/150W**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 16989 |
| **Efficacy** | ~115Lm/W |
| **Operating Temperature** | -20°C to +45°C |
| **Beam Angle** | 60° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP20, IP20 IP20 IP65 IP65, IP20 IP65, IP65 |
| **IK Rating** | IK09 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **3000K** |
| **CRI** | >85Ra |
| **Macadam Ellipse** | <3 step |
| **LEDs** | Single Bin CREE |

## PHOTOMETRIC DIAGRAM

*Image not available*