Print / Save as PDF

RICOMAN



# Canopus

Canopus 200W Multi Purpose Fitting 5000K Emergency

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R123103** |
| **Applications** | **Interior/ Exterior** |
| **Warranty** | 7 years |
| **Certification(s)** | CE, RoHS |

## PHYSICAL DATA


| | |
|---|---|
| **Colour Finish** | Black |
| **Dimensions (mm)** | H272 x L499 x W333 |
| **Luminaire Fixing** | **Surface Mounted, Suspended** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | TPa rated |


## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 200W |
| **Voltage Range** | AC90-260V |
| **Power Factor** | >0.95 |
| **Inrush Current** | <65A |
| **Running Current** | DC6.7A |

## DIMENSION DIAGRAM

200W

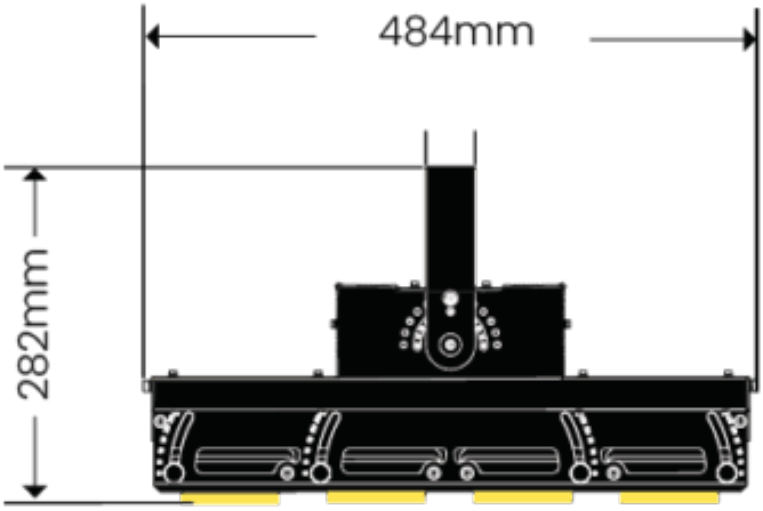

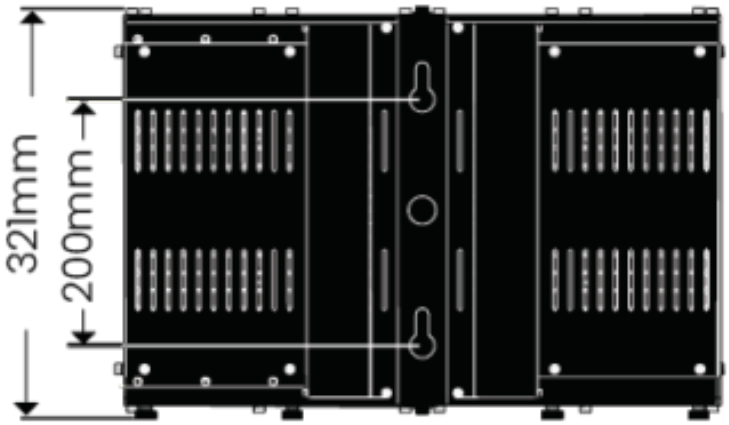**Part Code: R123103**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 28787 |
| **Efficacy** | ~145Lm/W |
| **Operating Temperature** | -20°C to +40°C |
| **Beam Angle** | 120° - 180° |
| **Operating Hours** | >70000 |
| **IP Rating** | IP65 |
| **IK Rating** | IK09 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **5000K** |
| **CRI** | >80Ra |
| **LEDs** | Epistar |

## PHOTOMETRIC DIAGRAM

*Image not available*