
Print / Save as PDF

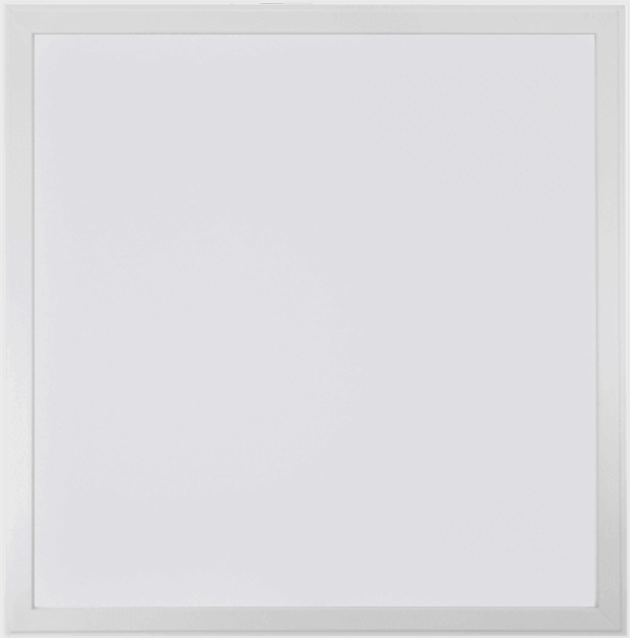

Aquavance IP66

Aquavance IP66 600x600 48W 4000K

PRODUCT DATA

Part Code (s)	**R101101/4K**
Applications	**Interior**
Warranty	5 years
Certification(s)	CE, RoHS, VDE


PHYSICAL DATA

Colour Finish	White
Dimensions (mm)	595 x 595 x 12.5
Luminaire Fixing	**Lay in, surface, burgess, armstrong, SAS, suspended**
Construction Material	Aluminium
Diffuser Type	TPa rated

ELECTRICAL DATA

Wattage	48W
Voltage Range	AC110-265V
Power Factor	>0.95
Inrush Current	<60A
Running Current	1100mA

DIMENSION DIAGRAM

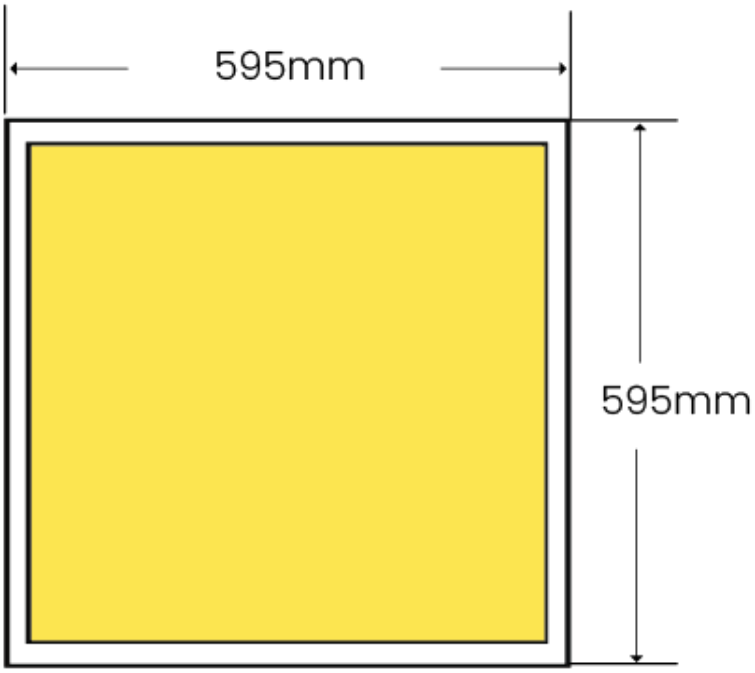
595mm
595mm


12.5mm

Part Code: R101101/4K

TECHNICAL DATA

Lumens (±5%)	5760
Efficacy	~120Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	120°
Operating Hours	>50000
IP Rating	IP66
IK Rating	IK08

LIGHT SOURCE DATA

Kelvins	**4000K**
CRI	>85Ra
Macadam Ellipse	equal or less trhan 3 SDCM
L80 B50	**90000 hours**
LEDs	Epistar

PHOTOMETRIC DIAGRAM

Image not available