Print / Save as PDF



Thanos

Thanos 100W 30 Degree

PRODUCT DATA

Part Code (s)	**R141400/100W/B30**
Applications	**Interior**
Warranty	5 years
Certification(s)	CE, RoHS

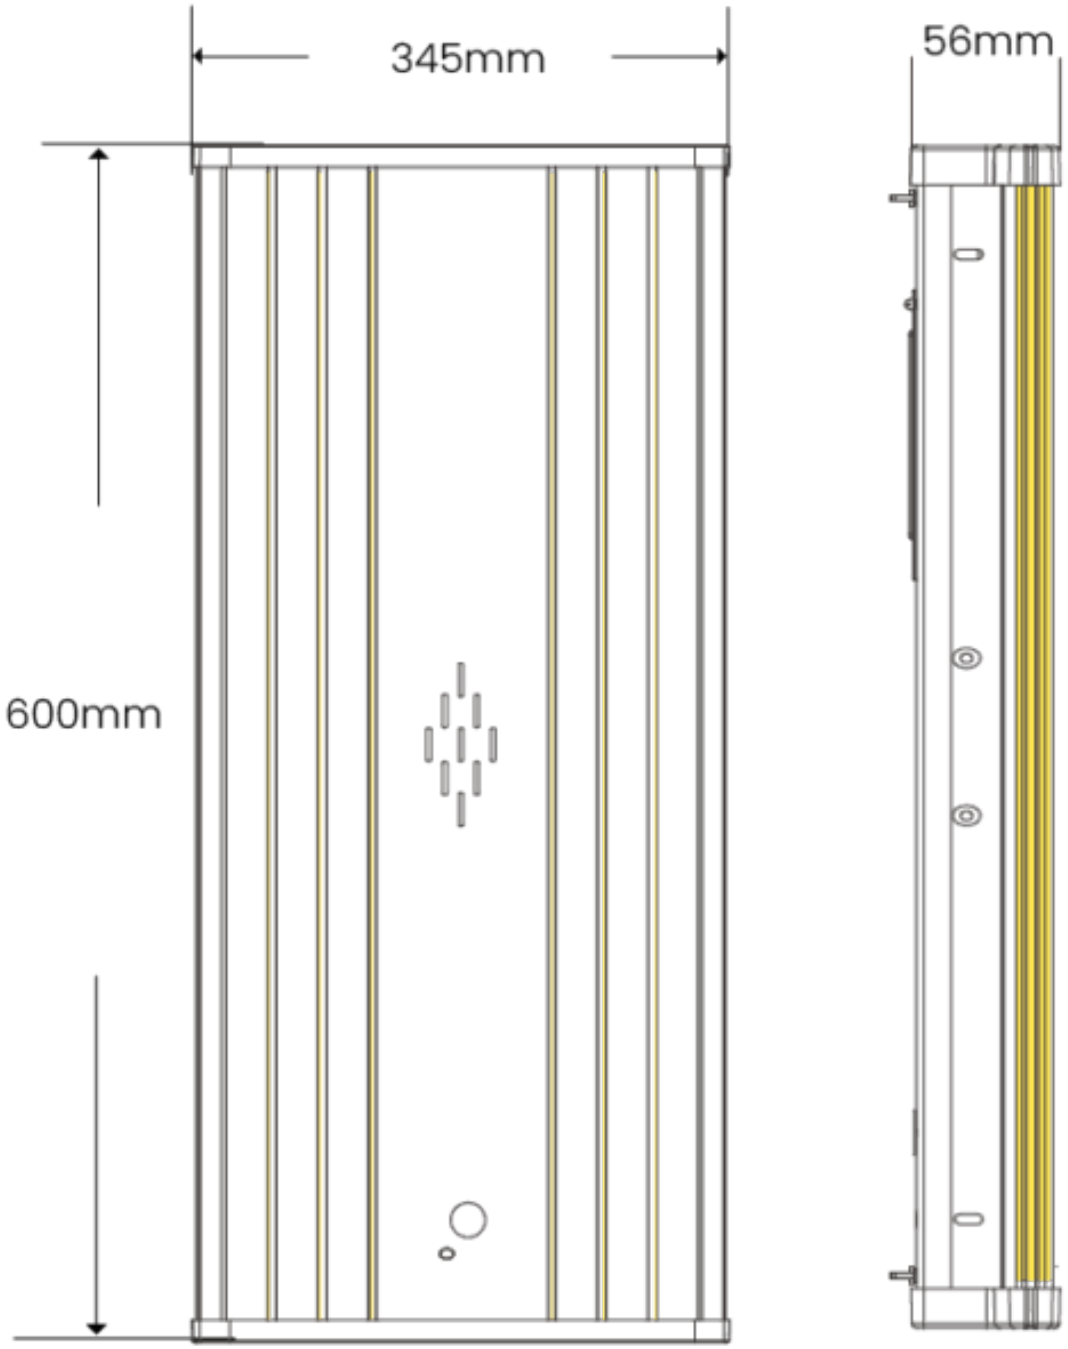
PHYSICAL DATA

Colour Finish	White
Dimensions (mm)	L600 x w345 x H56mm
Luminaire Fixing	**Suspension, surface, solid rod mounted**
Construction Material	Aluminium
Diffuser Type	Polycarbonate

ELECTRICAL DATA

Wattage	100W
Voltage Range	AC220-240V
Power Factor	>0.95
Inrush Current	<60A
Running Current	DC2.1A

DIMENSION DIAGRAM


345mm
56mm
600mm

Part Code: R141400/100W/B30

TECHNICAL DATA

Lumens (±5%)	15010
Efficacy	~150Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	30°
Operating Hours	>50000
IP Rating	IP40
IK Rating	IK10(with wire guard), IK08(without)

LIGHT SOURCE DATA

Kelvins	**4000K**
CRI	80Ra
Macadam Ellipse	Equal or less than 4 sdcm
L80 B50	**90000 hours**
LEDs	Epistar

PHOTOMETRIC DIAGRAM

Image not available