Print / Save as PDF



# Protium Max

Protium Max Single Downlight 25W 4000K

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R093011/4K/25W** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS UKCA |


## PHYSICAL DATA


| | |
|---|---|
| **Colour Finish** | White |
| **Body Colour** | White |
| **Dimensions (mm)** | H133 x L175 x W175mm |
| **Length** | Single Head |
| **Luminaire Fixing** | **Recessed** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | Acrylic |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 25W |
| **Voltage Range** | AC220-240 |
| **Power Factor** | >0.95 |
| **Inrush Current** | <60A |
| **Running Current** | DC600mA |

## DIMENSION DIAGRAM

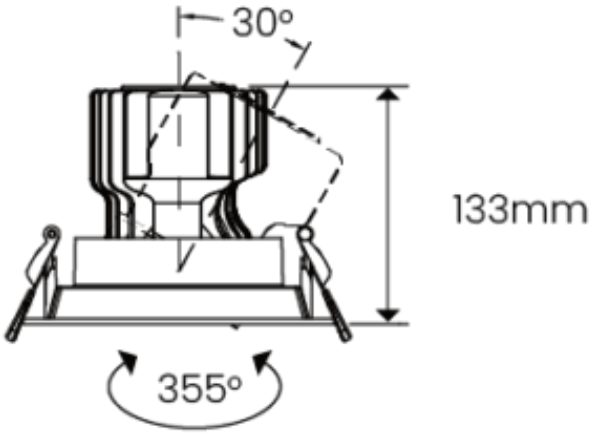

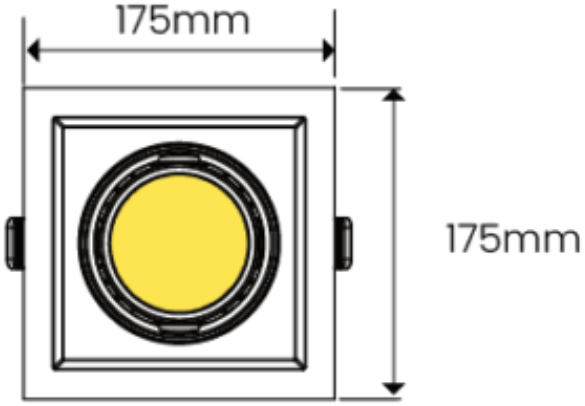


**Part Code: R093011/4K/25W**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 2520 |
| **Efficacy** | ~100 Lm/W |
| **Operating Temperature** | -20°C to +45°C |
| **Beam Angle** | 40° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP20 |
| **IK Rating** | IK05 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **4000K** |
| **CRI** | >91Ra |
| **Macadam Ellipse** | equal or less than 3 sdcm |
| **L80 B50** | **90000 hours** |
| **LEDs** | Single Bin Bridgelux COB |

## PHOTOMETRIC DIAGRAM

*Image not available*