Print / Save as PDF



# Pulsar Lite Track

Pulsar Track Light White Finish & Reflector 12W 4000K 38°

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R096702/38** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS |

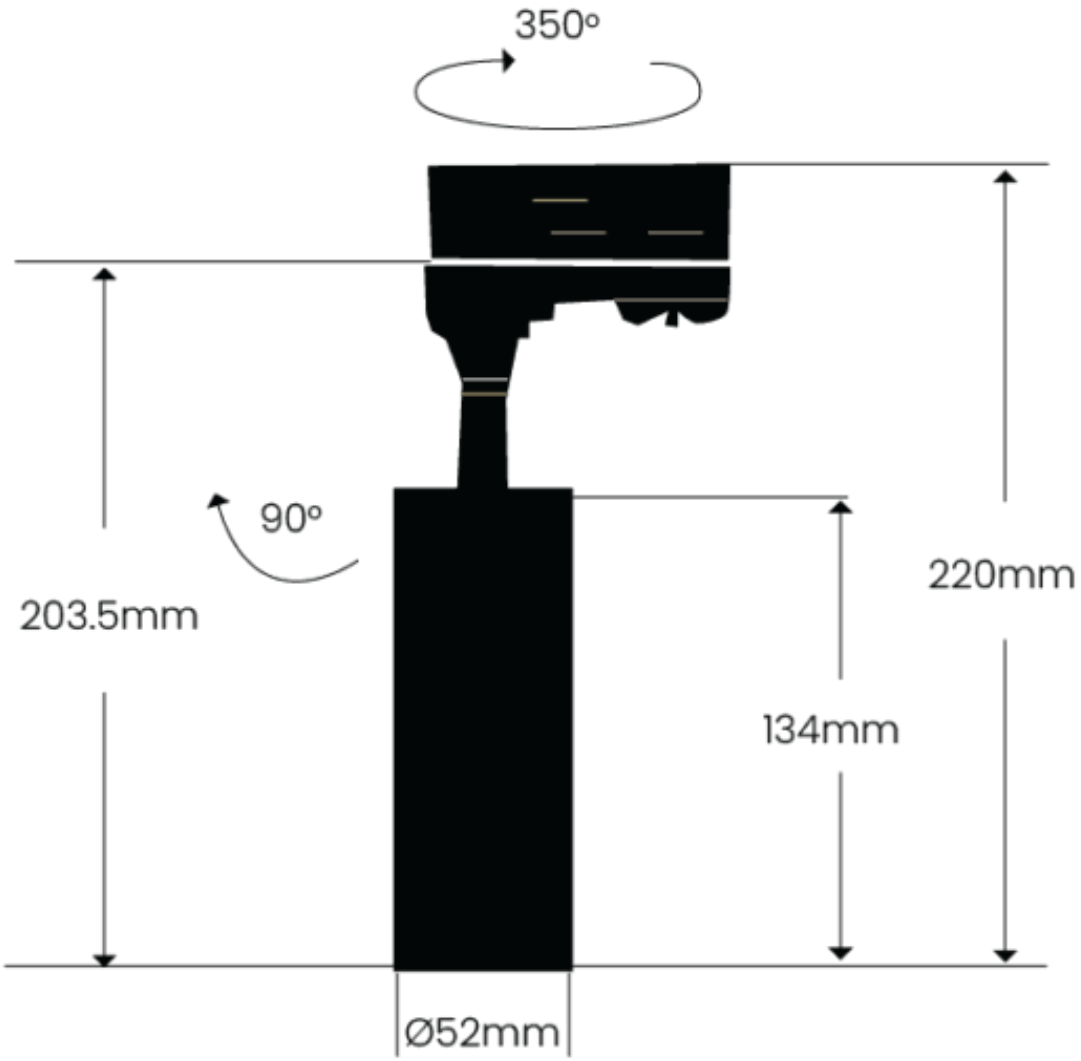
## PHYSICAL DATA

| | |
|---|---|
| **Colour Finish** | White (RAL 9016) |
| **Body Colour** | White |
| **Dimensions (mm)** | Ø52 x H220mm |
| **Luminaire Fixing** | **Track Mounted** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | PMMA |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 12W |
| **Voltage Range** | AC220-240V |
| **Power Factor** | >0.90 |
| **Inrush Current** | <60A |
| **Running Current** | DC300mA |

## DIMENSION DIAGRAM


350°
90°
203.5mm
220mm
134mm
Ø52mm


Ø52mm

**Part Code: R096702/38**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 1262 |
| **Efficacy** | ~100Lm/W |
| **Operating Temperature** | -20°C to +45°C |
| **Beam Angle** | 38° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP20 |
| **IK Rating** | IK07 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **4000K** |
| **CRI** | >90Ra |
| **Macadam Ellipse** | equal or less than 3 sdcm |
| **L80 B50** | **90000 hours** |
| **LEDs** | Single Bin Bridgelux |

## PHOTOMETRIC DIAGRAM

*Image not available*