Print / Save as PDF



# Ultra Slim

Ultra-Slim R Series Downlight Dim 23W 3000K

## PRODUCT DATA

| | |
|---|---|
| **Part Code (s)** | **R091509** |
| **Applications** | **Interior** |
| **Warranty** | 5 years |
| **Certification(s)** | CE, RoHS |

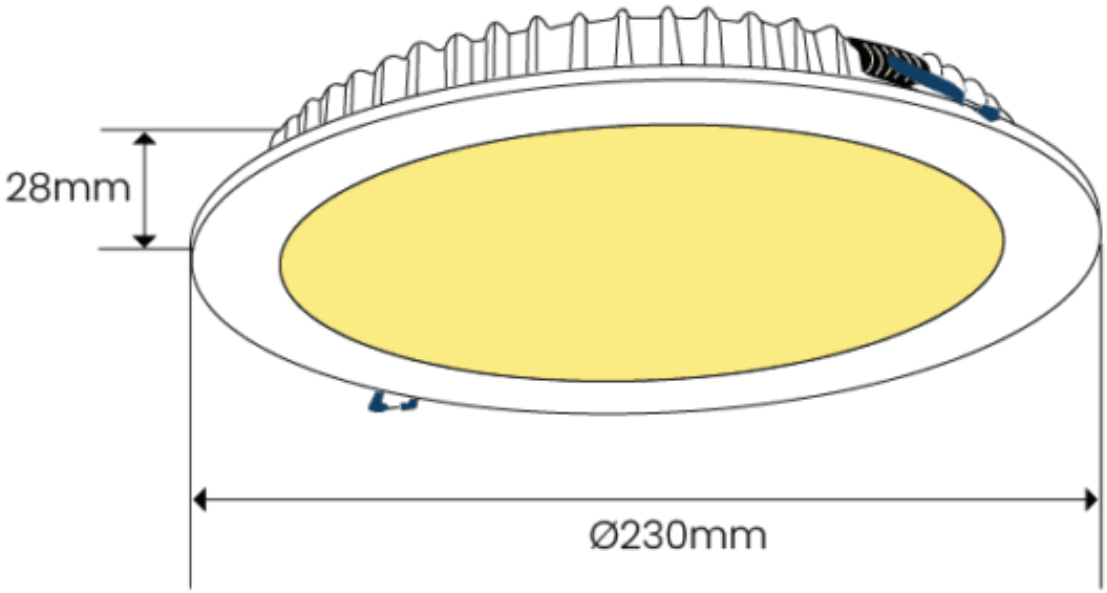
## PHYSICAL DATA

| | |
|---|---|
| **Colour Finish** | White |
| **Dimensions (mm)** | Ø230 x H28 |
| **Luminaire Fixing** | **Recessed** |
| **Construction Material** | Aluminium |
| **Diffuser Type** | TPb rated |

## ELECTRICAL DATA

| | |
|---|---|
| **Wattage** | 23W |
| **Voltage Range** | AC220-240 |
| **Power Factor** | >0.90 |
| **Inrush Current** | <60A |
| **Running Current** | DC350mA |

## DIMENSION DIAGRAM


28mm
Ø230mm


200mm

**Part Code: R091509**

## TECHNICAL DATA

| | |
|---|---|
| **Lumens (±5%)** | 2539 |
| **Efficacy** | ~110Lm/W |
| **Operating Temperature** | -20°C to +45°C |
| **Beam Angle** | 90° |
| **Operating Hours** | >50000 |
| **IP Rating** | IP54 |
| **IK Rating** | IK09 |

## LIGHT SOURCE DATA

| | |
|---|---|
| **Kelvins** | **3000K** |
| **CRI** | >82Ra |
| **Macadam Ellipse** | Equal or less than 4 sdcm |
| **L80 B50** | **50000 hours** |
| **LEDs** | Epistar |

## PHOTOMETRIC DIAGRAM

*Image not available*