
Print / Save as PDF

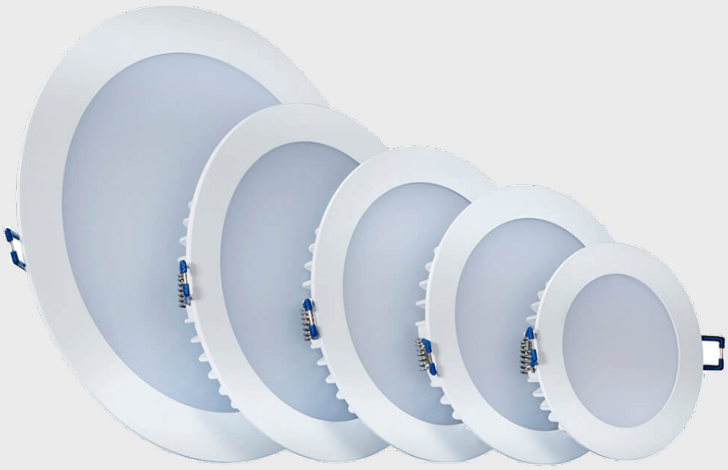

Ultra Slim

Ultra-Slim R Series Downlight Non Dim 15W 4000K

PRODUCT DATA

Part Code (s)	**R093206**
Applications	**Interior**
Warranty	5 years
Certification(s)	CE, RoHS


PHYSICAL DATA

Colour Finish	White
Dimensions (mm)	Ø160 x H26
Length	Ø160 x H26
Luminaire Fixing	**Recessed**
Construction Material	Aluminium
Diffuser Type	TPb rated

ELECTRICAL DATA

Wattage	15W
Voltage Range	AC220-240
Power Factor	>0.90
Inrush Current	<60A
Running Current	DC350mA

DIMENSION DIAGRAM

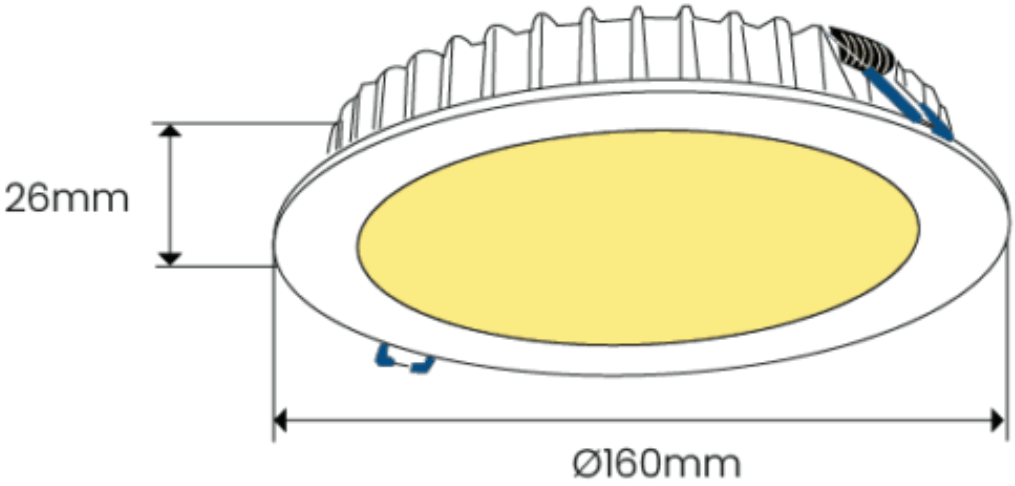
26mm
Ø160mm


140mm

Part Code: R093206

TECHNICAL DATA

Lumens (±5%)	1673
Efficacy	~111Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	90°
Operating Hours	>50000
IP Rating	IP54
IK Rating	IK09

LIGHT SOURCE DATA

Kelvins	**4000K**
CRI	>82Ra
Macadam Ellipse	Equal or less than 4 sdcm
L80 B50	**50000 hours**
LEDs	Epistar

PHOTOMETRIC DIAGRAM

Image not available