Print / Save as PDF



Modus

Modus 2.0 Circular Downlight 14W & 28W, 3000K & 4000K in Black Finish

PRODUCT DATA

Part Code (s)	**R096920/BK/CTC/14-28W**
Applications	**Interior**
Warranty	5 years / Emergency 3years
Certification(s)	CE, RoHS

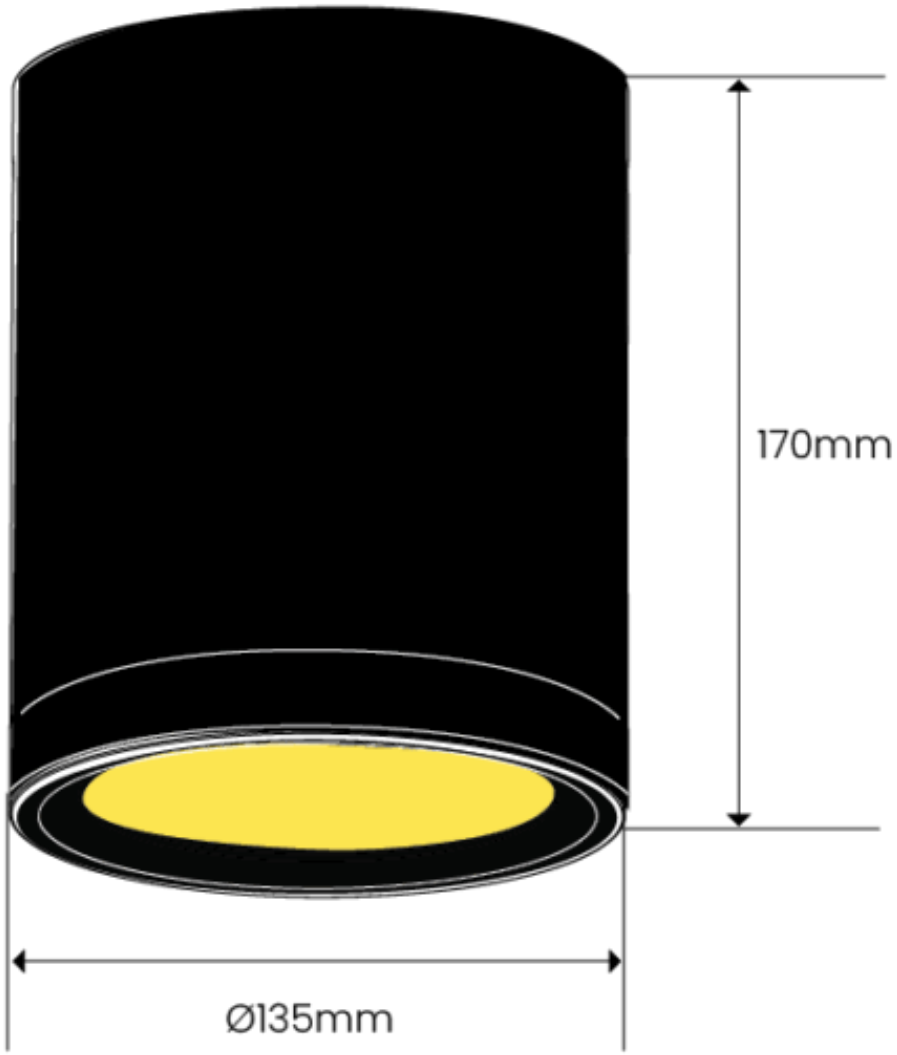
PHYSICAL DATA

Colour Finish	Black (RAL 9005)
Body Colour	Black
Dimensions (mm)	Ø135 x H170mm
Luminaire Fixing	**Surface Mounted**
Construction Material	Aluminium
Diffuser Type	Glass

ELECTRICAL DATA

Wattage	14W and 28W
Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<15A
Running Current	14W DC350mA / 28W DC700mA

DIMENSION DIAGRAM


170mm
Ø135mm

Part Code: R096920/BK/CTC/14-28W

TECHNICAL DATA

Lumens (±5%)	1638
Efficacy	~117Lm/W
Operating Temperature	-20°C to +45°C
Beam Angle	60°
Operating Hours	>50000
IP Rating	IP65
IK Rating	IK08

LIGHT SOURCE DATA

Kelvins	**3000K and 4000K**
CRI	>90Ra
Macadam Ellipse	equal or less than 3 sdcm
L80 B50	**90000 hours**
LEDs	Osram

PHOTOMETRIC DIAGRAM

Image not available