


Neon Flex

SPECIFICATION DOCUMENT

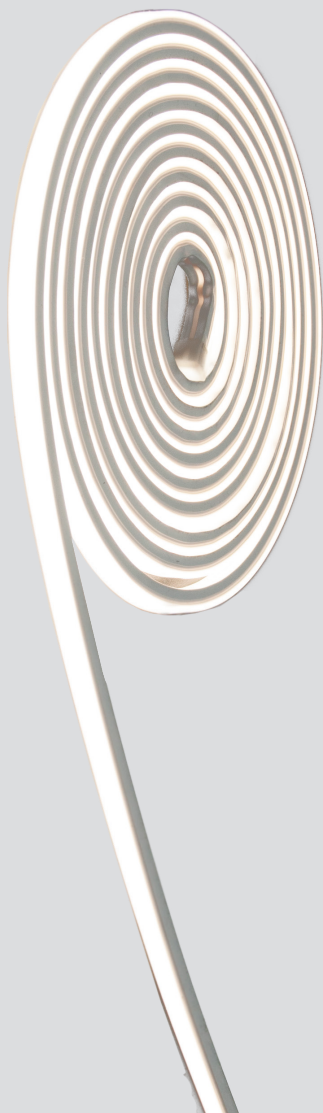

3 YR
WARRANTY

IP66

Overview



Flexible and creative 13mm wide sleek smooth lightlines that can flow and flex to create unique light shapes. Suitable for indoors or outdoors applications, IP66 as standard with an option of IP68 as a special order.

UK
CA

CE

RoHS

RICOMAN®




Finish:  White

Power: **9.6W per metre**

Kelvin: **2700K** **3000K** **4000K**

Technical Drawings (mm)



Overview

Applications	Interior/Exterior
Construction Material	PVC
Diffuser Type	Silicon
IP Rating	IP67
Mounting	Surface mounted
Ambient Temperature	-25°C to +55°C
Warranty	3 years

Luminaire Output

Colour Temperature	2700K / 3000K / 4000K
Wattage	9.6W/M
Lumens	~710lm/M
CRI	>90 Ra
Beam Angle	114°
Operating Hours	30,000
Macadam Ellipse	≤4 sdc _m

Supply & Power


Voltage Range	DC24V
Protection Class IEC	Class III
Driver	Remote

Options

Suffix	Option
/DH	Mains Dimming
/DD	DALI Dimming
/DL	0-10V Dimming
/DSI	DSI Dimming

Installation examples

Hallam Tower Apartments, Sheffield, UK

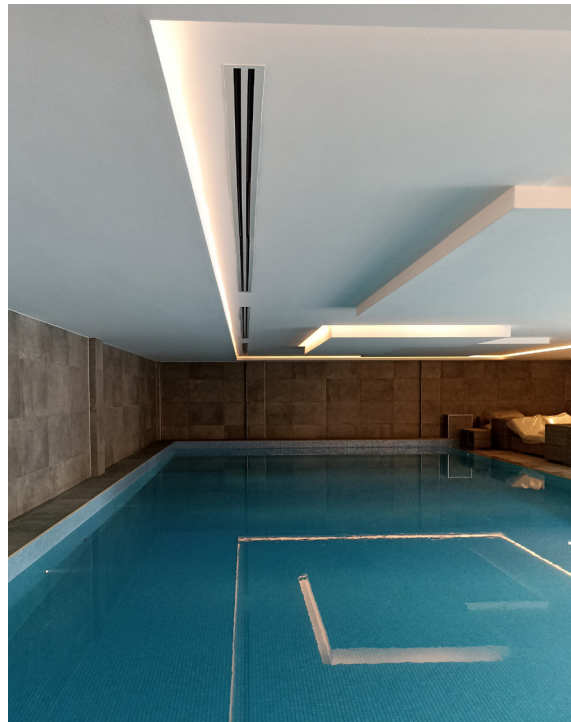

Studio Powers Architects, Manchester, UK

