


Neon Flex

SPECIFICATION DOCUMENT

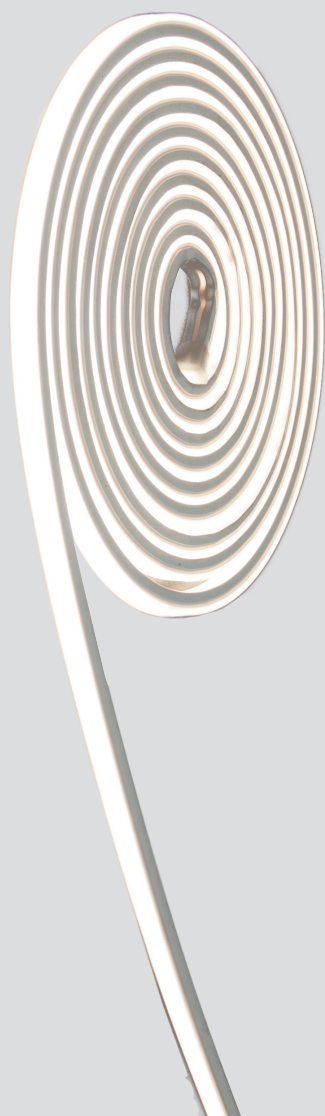

3 YR
WARRANTY

IP66

Overview



Flexible and creative 12mm wide sleek smooth lightlines that can flow and flex to create unique light shapes. Suitable for indoors or outdoors applications, IP66 as standard with an option of IP68 as a special order.

UK
CA

CE

✓
RoHS

RICOMAN®



Finish:  **White**


Power: **12W per metre**

Kelvin: **3000K**

Tunable White 3000K-5000K

Custom
Solutions: **RGBW**

Technical Drawings

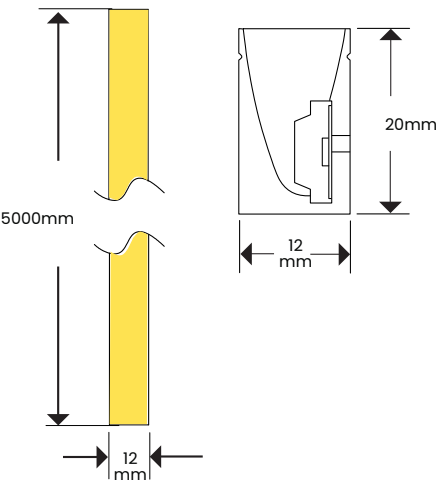

Overview

Applications	Interior/Exterior
Construction Material	PVC
Diffuser Type	Silicon
IP Rating	IP66 IP68
Mounting	Surface mounted
Ambient Temperature	-20°C to +45°C
Warranty	3 years

Luminaire Output

Colour Temperature	3000K custom
CRI	>80 Ra
Beam Angle	180°
Operating Hours	30,000
Macadam Ellipse	≤4 sdc _m
L70 B50	70,000 hours

Supply & Power

Voltage Range	DC24V
Protection Class IEC	Class III
Driver	Remote

Product Codes & Specifications


Code	IP Rating	Lumens
R710101	IP66	700 per metre
R710102	IP68	700 per metre

Options

Suffix	Option
/DH	Mains Dimming
/DD	DALI Dimming
/DL	0-10V Dimming
/DSI	DSI Dimming

Installation examples

Hallam Tower Apartments, Sheffield, UK

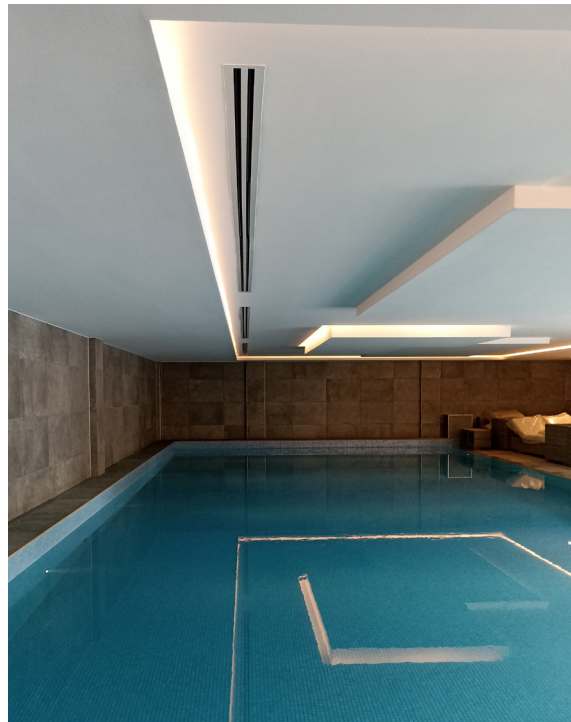

Studio Powers Architects, Manchester, UK

