

Pulsar

Pendant

SPECIFICATION DOCUMENT



5 YR
WARRANTY

IP20

CRI
>90

Overview

Modern mini architectural pendant combining efficacy with elegance. With a minimalistic, contemporary design and durable aluminium construction it can add a touch of subtle stylish architectural lighting in domestic or commercial spaces. The same style luminaire is also available in surface mounted, recessed and track mounted version.

PULSAR
PENDANT
RECESSED


PULSAR LITE
RECESSED | SURFACE | TRACK

UK
CA

CE

✓
RoHS

RICOMAN®



Finish: ☐ White


☒ Black

Power: 10W

Kelvin: 3000K 4000K

Beam Angle: 15° 24° 38° 55°

Technical Drawings

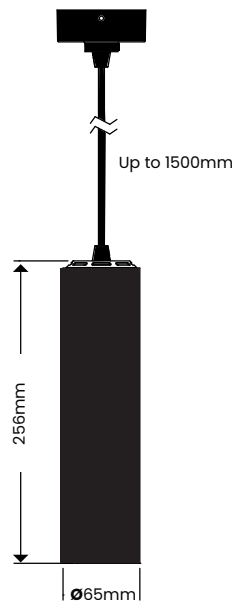

Overview

Applications	Interior
Construction Material	Aluminium
Diffuser Type	PMMA
Reflector	Gun metal
IP Rating	IP20
IK Rating	IK07
Mounting	Pendant
Ambient Temperature	-20°C to +45°C
Weight (kg)	0.78
Warranty	5 years

Luminaire Output

Colour Temperature	3000K 4000K
CRI	>90 Ra
Efficacy	90 Lm/W
Beam Angle	50°
Operating Hours	50,000
Macadam Ellipse	≤3 sdc _m
L70 B50	100,000 hours
LEDs	Single Bin Bridgelux

Supply & Power

Voltage Range	AC220-240V
Power Factor	>0.90
Inrush Current	<20A
Running Current	DC250mA
Protection Class IEC	Class I
Driver	Integral
Cable entry	Back

Product Codes & Specifications

Code	Kelvin	Lumens
R096201/3K	3000K	895
R096201	4000K	900

Options

Suffix	Option
/BK	Black body
/15	15° beam angle
/38	38° beam angle
/55	55° beam angle



Photometry

