

# Sounds Like Light - Breve Pendant

SPECIFICATION DOCUMENT

RICOMAN®



5 YR  
WARRANTY

IP20

## Overview

Breve is an elongated rounded rectangle acoustic pendant light, with a clean and easy finish. This provides a soft, organic alternative to more rigid rectangular designs, while still offering a broad, uniform distribution of light and sound absorption. The light source is a linear light with Samsung LED chips, known for longevity and high performance.



| Part Code  | Description                                                 | Kelvin | Lumens |
|------------|-------------------------------------------------------------|--------|--------|
| R649218/3K | Sounds Like Light Breve Pendant in 3000K With Opal Diffuser | 3000K  | 3455   |
| R649218/4K | Sounds Like Light Breve Pendant in 4000K With Opal Diffuser | 4000K  | 3290   |


| Acoustic Overview     |                 |
|-----------------------|-----------------|
| Applications          | Interior        |
| Construction Material | Polyester – PET |
| IP Rating             | IP20            |
| Mounting              | Suspended       |
| Acoustic Values (NRC) | 0.91            |
| Thickness (mm)        | 15              |
| Weight (kg)           | 8.8             |
| Warranty              | 5 years         |

Technical Drawings (mm)

Light Source




Raft

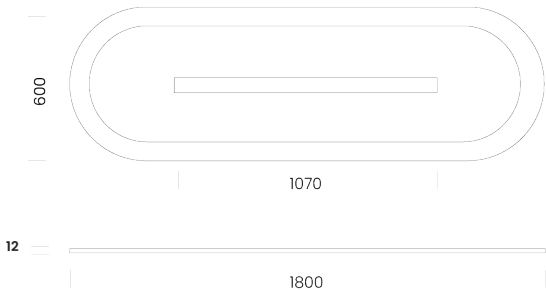


Options

| Suffix | Option                                                             |
|--------|--------------------------------------------------------------------|
| /SLLXX | Acoustic baffle colour Replace XX with numbers 01 – 22 (Next page) |
| /27K   | 2700K (lead time)                                                  |
| /3K    | 3000K                                                              |
| /4K    | 4000K                                                              |
| /TW    | Colour temp change 2700K-6500K                                     |
| /RGBW  | RGBW colour change                                                 |


Colour Options



White /01



Silver Savoya /02




Camel Ivory /03




Mild Brown /04




Marble Beige /05



Light Grey /06



Stone Grey /07



Dark Grey /08



Charcoal Grey /09




Black /10



Green Marble /11



Green /12




Marble Rose /13



Red /14



Purple /15



Navy /16



Dark Blue /17



Cyan /18



Light Blue /19





Orange /20



Yellow /21



Blue Marble /22

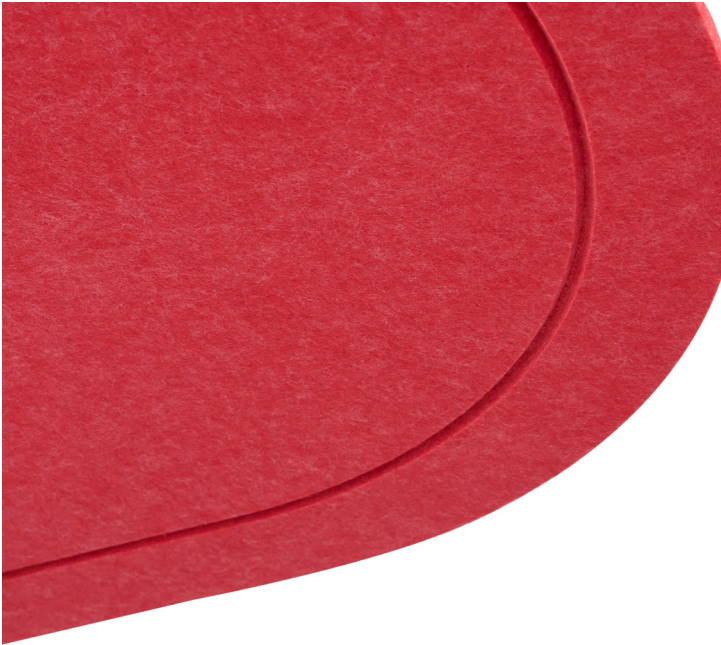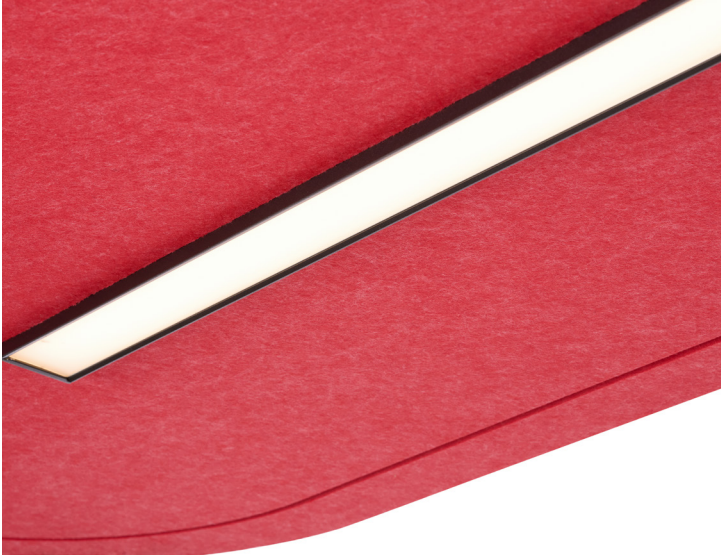

#### Luminaire Overview

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Applications          | Interior                                      |
| Construction Material | Aluminium                                     |
| Diffuser              | Opal                                          |
| IP Rating             | IP20                                          |
| Mounting              | Suspended                                     |
| Weight (kg)           | 2.6Kg                                         |
| Ambient Temperature   | -20°C to +45°C<br>(0°C to 40°C for emergency) |
| Warranty              | 5 years                                       |

#### Luminaire Output

|                    |                     |
|--------------------|---------------------|
| Colour Temperature | 3000K or 4000K      |
| CRI                | >90 Ra              |
| Efficacy           | ~120 Lm/W           |
| Beam Angle         | 100°                |
| Operating Hours    | 50,000              |
| Macadam Ellipse    | ≤3 sdc <sub>m</sub> |
| Running Current    | 600mA               |
| L70 B50            | 100,000 hours       |
| Wattage            | 28W                 |

#### Supply & Power

|                      |            |
|----------------------|------------|
| Voltage Range        | AC220-240V |
| Power Factor         | >0.90      |
| Inrush Current       | <60A       |
| Protection Class IEC | Class II   |
| Cable entry          | Back       |