

RICOMAN®

Satellite LED Suspended (R830-01)

INSTALLATION INSTRUCTIONS



PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE A COPY WITH THE END USER FOR FUTURE REFERENCE.

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.

This product is a CLASS II Fitting and must be connected to earth termination.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES

- Do not disassemble or amend the structure of the luminaire as this can be dangerous and it would void your warranty.
- Electrostatic Sensitive Devices (ESD): to be handled with precaution to avoid ESD
- The luminaire must be installed on a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.
- The luminaire must not be installed above hot objects such as ovens to avoid damage to the fitting.
- Ensure that ALL electrical connections are tight with no loose strands.

AFTER INSTALLATION & MAINTENANCE

- Avoid looking directly to the LEDs to avoid dazzling and eye strain.
- Do not use chemicals and abrasives to clean this product. Wipe with a soft cloth only to avoid scratching.
- Storage conditions: room temperature and dry environment.

SPECIFICATION

Wattage:

R830101 - D400mm - 20W | 40W

R830201 - D600mm - 40W | 60W

R830301 - D800mm - 60W | 80W

Power Supply: AC220-240V

Power Factor: >0.9

CCT: 3000K / 4000K / 5000K


CRI: > 85Ra

Driver: Built-in

Body: Aluminium Alloy

Satellite LED Suspended (R830-01)

INSTALLATION STEPS

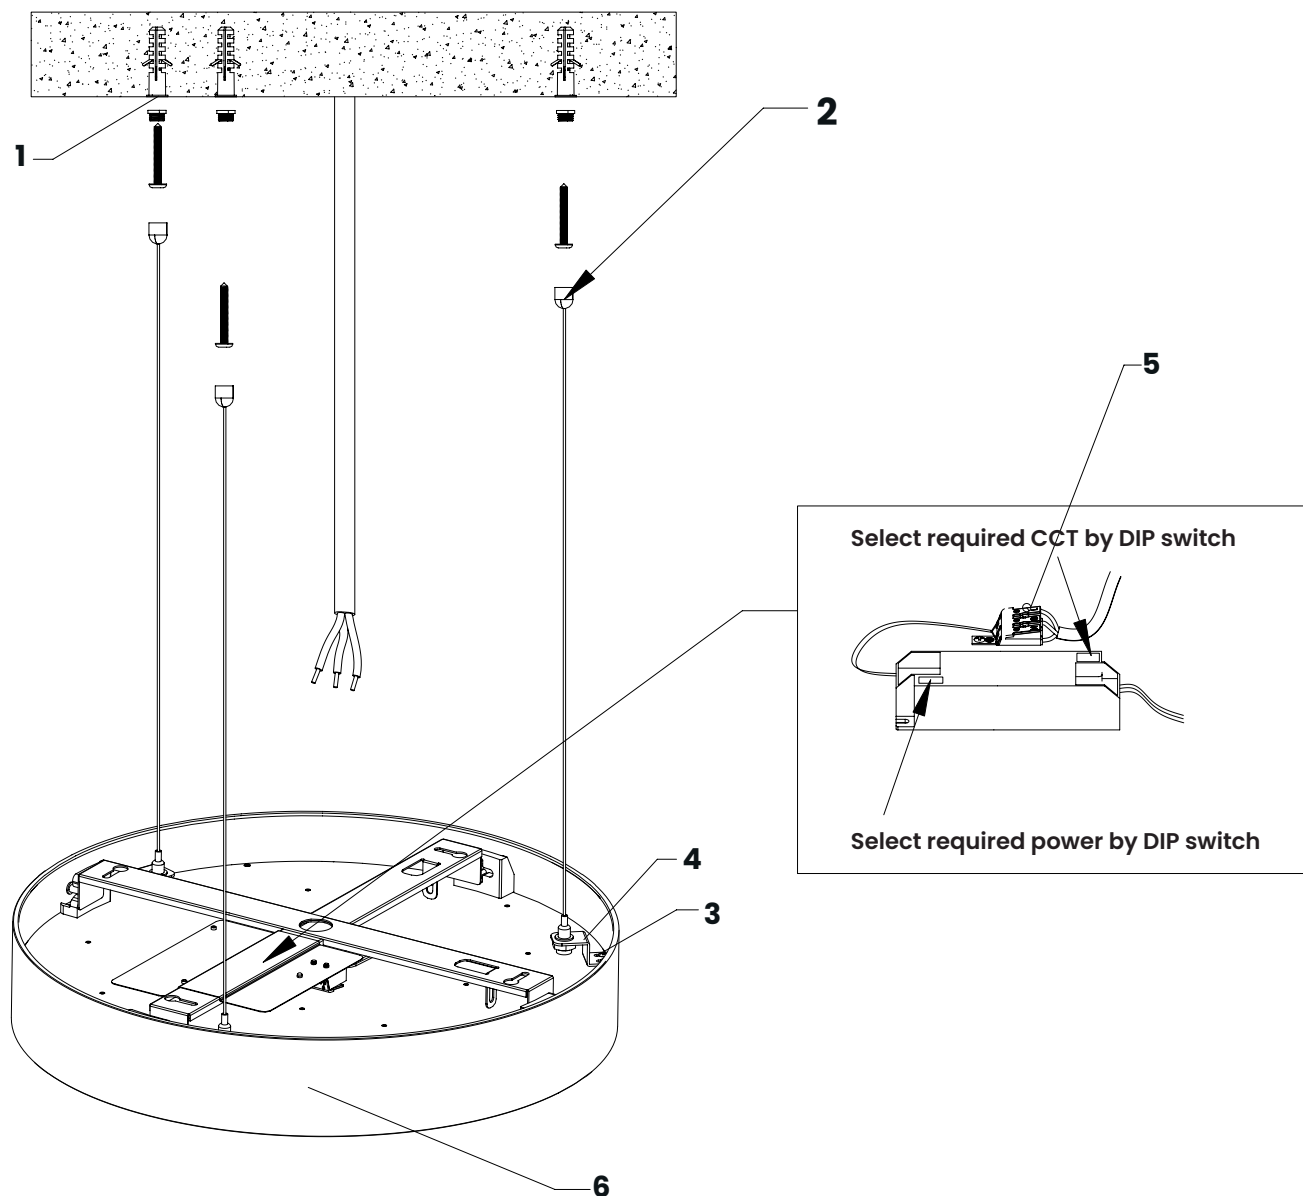

ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.


Satellite LED Suspended (R830-01)

INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.


STEP 1

Fix the wall line suspension device to the ceiling.

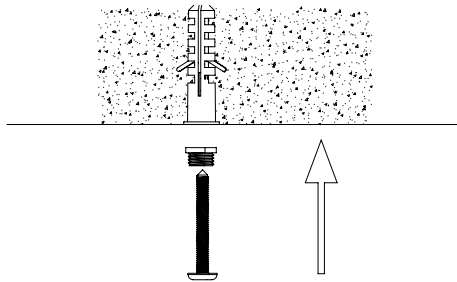


STEP 2

Assemble the wire rope to the ceiling plate.

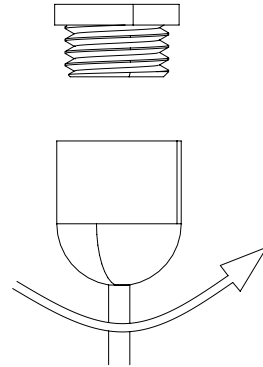


STEP 3

Remove three pairs of the two screws (M3*4) which are close on the base, Z Shape bracket fixed on back plate by extra screws (M3*10) instead.

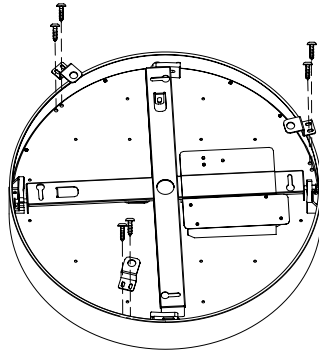


STEP 4

Install the hanging wire device on Z Shape Bracket

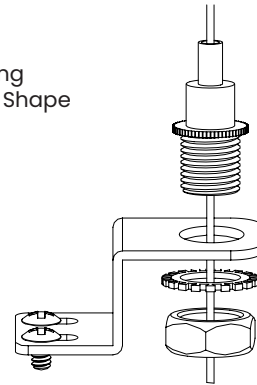


STEP 5

Insert the connecting wire to the input terminal on lamp body, brown wire is connected to L, blue wire is connected to N, yellow wire is connected to GND

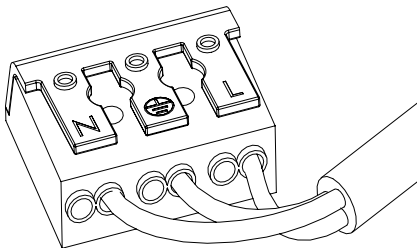

STEP 6

Adjust the height of the light fixture and complete the installation.

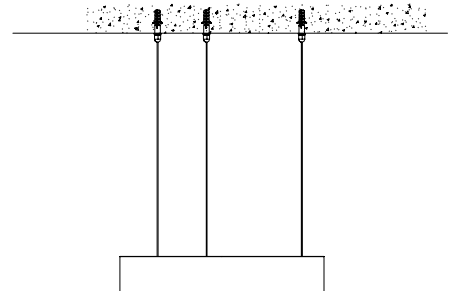

ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.