



RICCONI[®]

LIGHTING CATALOGUE





10 years UK manufacture of lighting

Over 50% of our products are made in the UK. At RICOMAN, we believe in the importance of investing in UK lighting manufacturing.

By enhancing our facilities, supply chain, and partnerships, we ensure the efficient production of high-quality lighting products, meeting the growing demands of our customers and ensuring their satisfaction.

Lighting design

With a team of technical and creative lighting designers and project managers, we offer comprehensive services including CAD design, 3D renders, fully compliant lighting designs, and expert technical and design advice.

Environmental impact

We are committed to sustainability and have introduced various initiatives to reduce our environmental impact. These include adopting an electric car fleet, eliminating plastics from packaging where possible, and recycling materials with a cardboard shredder to minimise landfill waste.






Product development

Our product development team create high-performance lighting products that boast excellent performance and class leading technology. We can also make swift and efficient customisations in order to create products that are truly specification-compliant.



Casambi

The Casambi lighting system offers seamless control over lighting, allowing wireless brightness adjustments, colour temperature and scenes , through a simple app or wall control. Casambi improves energy efficiency and makes creating the perfect ambience a simple task.

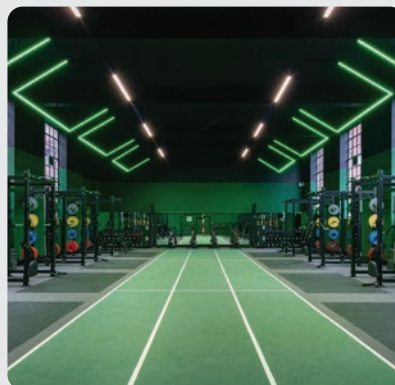

Integrated solutions

From cable management systems, pre-wired luminaires or smart control systems, at RICOMAN we aim to add value to our clients offering integrated solutions by saving time for your installers. Talk to our team and get your luminaires pre-wired and ready delivered on-site.

LINEAR LIGHTING

Projects p.12, **Estrella Pro** linear system p.26, **Flow** the curved linear system p.36, **Astrowave** the flexible 360° neon light system p. 44, **Neon Flex** p.52, **Aeroline** p.54, **Ricostrip** p. 56.

PENDANT LIGHTING

Projects p.60 **Flow Rings** p.68, **Sounds Like Light** Acoustic lighting p.74, **Galaxia** p.80, **Nebula** p.83, **FloraLume** Biophilic lighting p.84, **Moon** p.88, **Pulsar** p.92.

DOWNLIGHTS

Projects p.96 **Neptune** IP65 Low Glare p.104, **E-pro** architectural p.106, **Core** p.112, **R3** p.113, **Pinnacle** p.114, **Endor** Customisable p.116, **Sirius** Commercial p.122, **Ultra Slim** p.123, **Carina** p.124, **Centorio** p.125, **Protium** p.126, **Protium Max** p.127, **Modus** p.128 **Saturn** p.130 **Modus Max** p.131, **Pulsar Lite** spotlight p. 132.

Projects p.138, **E-Pro** track p.146, **Zenith** p.149 **Pulsar** Lite track p.150, **Pulsar** pendant track p.149, **Egress** track exit sign p.152, **Draco** track emergency p.153, **Tracks & Accessories** for 3 circuit p.154, **Zodiac** 48V track system p.155.

Projects p.172 **Core Plus** backlit panel light p.180, **Core UGR** Low UGR Backlit Panel p.181, **Aquavance** Ip66 rated panel p.182, **Pure Panel** 5x5 panel light p.184, **Libra** p. 185, **O²** customasible modular luminaire p.186, **CTC Panel** p. 192, **RGBw** p.193, **Sky Panels** p.194, **Panel Accessories** p.196.

Projects p.200, **Outdoor** p.206, **Bulkheads** p. 214. **Industrial** p. 222, **Emergency** p. 230.

Xcite Gym, Exert HIT Studio in Scotland.

RICOMAN supplied lighting to West Lothian Leisure Xcite, a unique training studio with modern TechnoGym equipment. This lighting project was designed by Bryan Gardner at Rexel Lighting Design in Edinburgh, with the electrical work executed by John Noble Electrical.

To enhance the bespoke training experience, West Lothian Leisure chose RICOMAN's **Estrella Pro in RGBW for its flexibility.**

Configured in X shapes and continuous lines, it illuminated different sections. **Casambi technology** allowed individual or group control of lighting via an iPad app, providing limitless scene options.







Flour Patisserie, in Jersey.



Flour Patisserie in Jersey
Client: LED Lighting Jersey / Photos: LED Lighting Jersey





Flow our curved feature lighting system was designed by RICOMAN and used in a new and contemporary cake & coffee shop in Jersey, Flour the Patisserie.



Linear lighting

Estrella Pro linear lighting system.



R3-----

Estrella Pro linear system



CRI	>90 Ra
Operating Hours	50,000
SDCM	≤4
L70 B50	100,000 hours
IP Rating	IP20



Mounting options



R34

Surface mounted
or suspended

Width	50
Height	100



R35

Recessed

Width	64
Height	47

Lengths

05
532mm

10
1064mm

16
1596mm

21
2128mm

01
L Shape
(not available
for wallwash
version)

02
T Shape
(not available
for recessed and
wallwash version)

03
+ Shape
(not available
for recessed and
wallwash version)

Customisable lengths and shapes

Optics



01

Opal

Efficacy	120Lm/W
Beam Angle	100°



02

Square aperture

Efficacy	125Lm/W
Beam Angle	90°



03

Round aperture

Efficacy	125Lm/W
Beam Angle	50°



04

Wallwash aperture

Efficacy	116Lm/W
Beam Angle	60°



05

Dark louvre

Efficacy	75Lm/W
Beam Angle	70°



06

Mirror louvre

Efficacy	96Lm/W
Beam Angle	70°



07

White louvre

Efficacy	104Lm/W
Beam Angle	70°



09

UGR

Efficacy	100Lm/W
Beam Angle	100°

Seamless continuous lines of light and shapes, available as a surface/suspended version with an optional indirect light output, also available as a recessed linear. Estrella pro boats a range of eight optical solutions and the option of an integrated tiltable spotlight.

Colour Finish



- /WT**
Matte white RAL9016
- /BK**
Matte black RAL9005
- /RALXXXX**
Special colour, replace XXXX with RAL

Kelvin

- /3K**
3000K
- /4K**
4000K
- /5K**
5000K
- /TW**
Tunable white
- /RGBW**
RGBW

Integrations



- /SPT**
Integrated with Pulsar Spotlight
- /BP**
Blanking Plate
- /UP**
Direct / Indirect light output
(not available on recessed)

Output

- /7W**
532mm
- /14W**
532mm
1064mm
- /26W**
532mm
- /28W**
1064mm
2128mm
- /52W**
1064mm
- /21W**
1596mm
- /42W**
1596mm
- /78W**
1596mm
- /56W**
2128mm




XO Fitness Gym in Ilkley
Lighting design: RICOMAN Lighting. Electrical contractor: TAC Electrical





Estrella Pro linear system

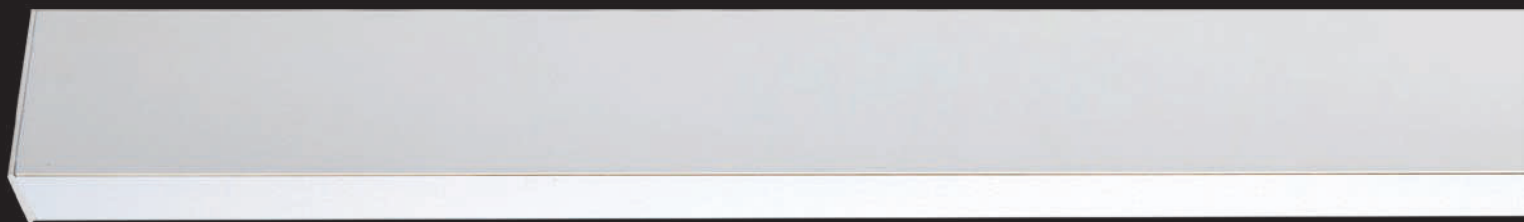

Options

/E

3 hour emergency

/EMPRO

3 hour DALI addressable emergency

/E-Z10

Z10 Integral emergency with remote control testing

/PRI

PIR sensor

/CC

CASAMBI controls

/DD

DALI dimming

Accessories

R33-11	Recessed Clips
R33-04	Connection Pack (Not Needed On Recessed)
R33-06	Surface Mounting Clips
R33-07	3m Suspension Kit
R33-08	T Bar Grid Ceiling Kit
R33-09	Track Mounting Kit
R33-10	Side Wall Mounting Kit
R33-12	Solid Rod Mounting Kit
R10-Z10	Z10 Emergency Remote Control
R33-37	Estrella Pro 3m Suspension Kit 2 Point Pack
R33-14	Estrella Pro 2 In 1 Connection Pack And Suspension



Code Example

R341101/WT/3K/UP/28W: Estrella Pro Opal 1064mm 28W white body in 3000K with direct+indirect light.
Full part code breakdown on page 58.

Flow curved
linear system.

THERE'S ALWAYS
ROOM FOR DESSE



S
ERT

Flow system is comprised of straight and arc shaped modules that can be combined in creative ways to create unique lighting environments.

Flow curved linear system



Efficacy	57 Lm/W
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	±3
IP Rating	IP20



Imagine Flow flowing freely, creating independent or crossing rings, waves, spirals, interconnecting curves. The direction of the light moving from downwards to inwards and outwards. Straight lines ending up in curves, transforming from 2D to 3D lighting, creating unlimited possibilities.

Light direction



1
Downwards lighting



2
Outwards lighting



3
Inwards Lighting

Shape



1
Straight profile




2
45 degree arc profile



3
90 degree arc profile



4
Twist left 90 degrees profile

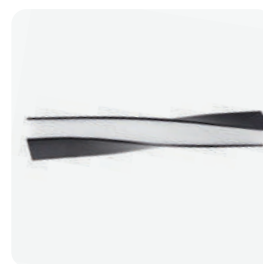

5
Twist right 90 degrees profile



6
Twist 180 degrees profile

Flow curved linear system

Models

250 2500mm length for straight profile.		30 320mm diameter circle for arc profiles		80 800mm diameter for arc profiles		150 1500mm diameter circle for arc profiles		300 3000mm diameter circle for arc profiles	
Length	2500	Length	250	Length	310 / 630	Length	590 / 1180	Length	1180
Lumens	462Lm	Lumens	295Lm	Lumens	355Lm / 612Lm	Lumens	571Lm / 1358Lm	Lumens	1243Lm
Wattage	45W	Wattage	5W	Wattage	6W / 11W	Wattage	11W / 22W	Wattage	20W

40 400mm length circle for twist profile.		50 500mm length circle for twist profile.	
Length	400	Length	500
Lumens	462Lm	Lumens	538Lm
Wattage	8W	Wattage	10W

Colour Finish



/WT
Matte white RAL9003



/BK
Matte black RAL9005



/sv
Matte silver RAL9006

Kelvin

/3K
3000K

/4K
4000K

Code Example


R3633150/WT/3K; Flow 90° arc, 1500mm Inwards lighting in white body in 3000K.
Full part code breakdown on page 63.

Accessories


R36-01	Flow 20m roll of diffuser
R36-02	Flow End caps (/BK, /WT, /SV)
R36-03	Flow 2m Suspension kit
R36-04	Flow 2m 2 in 1 flex and suspension kit
R36-06	Flow inward/outwards lighting mounting buckle
R36-07	Flow downwards lighting mounting buckle
R36-09	Flow connection pack



Flow curved linear system

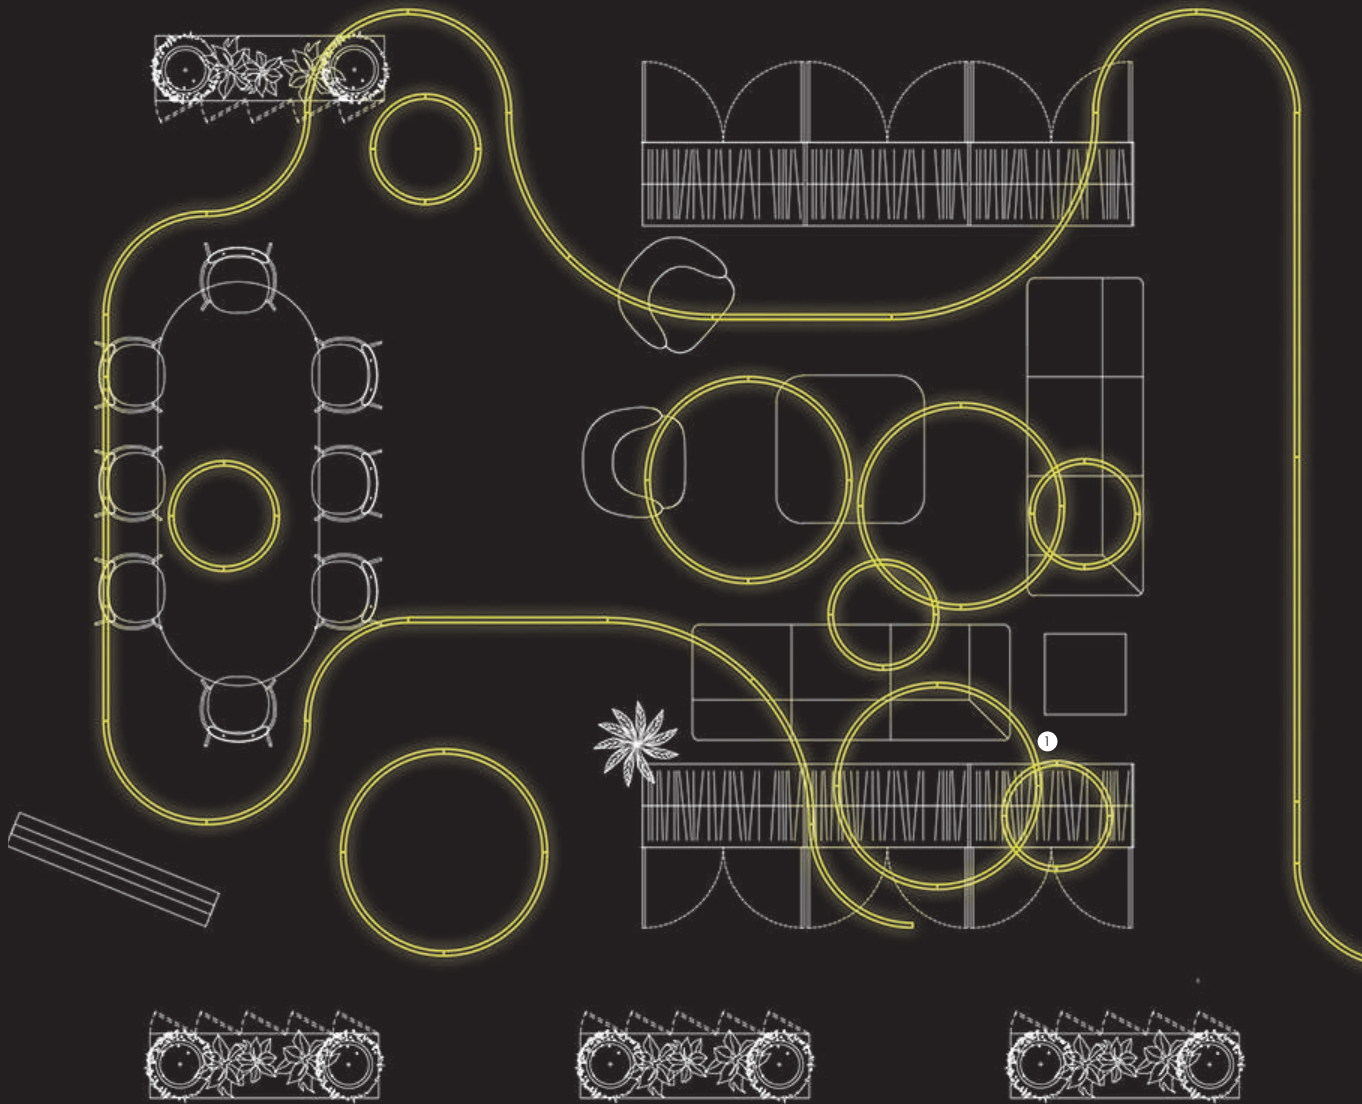

We offer tailored lighting design solutions, along with detailed renders, so you can visualise how your project looks like. Whether it's for a commercial or residential space, our team will guide you through the process to ensure the perfect lighting solutions.

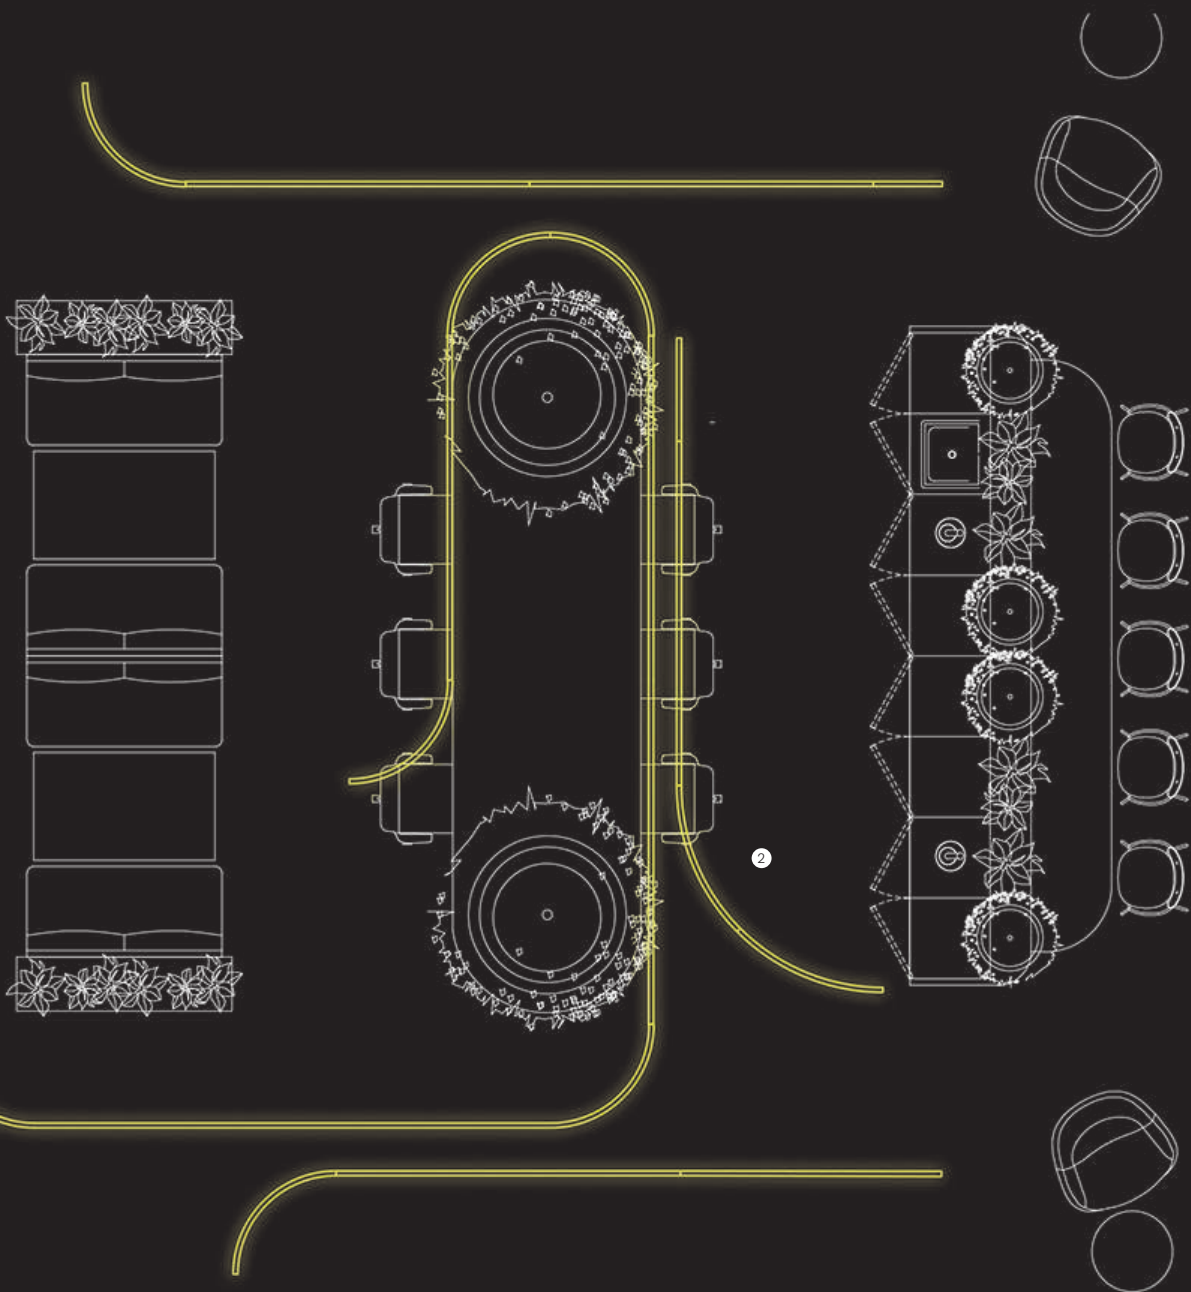

1



2



To discuss your project and
get started, simply contact
support@ricoman.com


Astrowave the flexible
360° neon light system.

Let your
imagination



on flow.

Astrowave

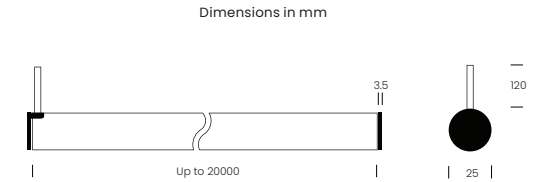

Finish	White or Black
CRI	>90 Ra
Beam Angle	360°
Operating Hours	50000
IP Rating	IP65

Length **/XM**
X=metres
needed


Model	1000	2000	/SPI	/RGB
	Up to 5M standard	Up to 20M standard	Pixel addressable	RGB
Voltage	24V	Voltage 48V	Voltage 12V	Voltage 24V
Wattage	14.4W/M	Wattage 12.5W/M	Wattage 21.6W/M	Wattage 14.4W/M

Colour Finish **/WT** **/BK**
White Black
Only available
for RGB & SPI
options.

Options **/ECE** **/SE**
End Cap Entry Side Entry

Kelvin	/23K	/27K	/3K	/4K	/SPI	/RGB
	2300K	2700K	3000K	4000K	Pixel addressable	RGB

Code Example R75I000/ECE/27K- 24V Standard Astrowave with end cap entry in 2700K.
Full part code breakdown on page 64.

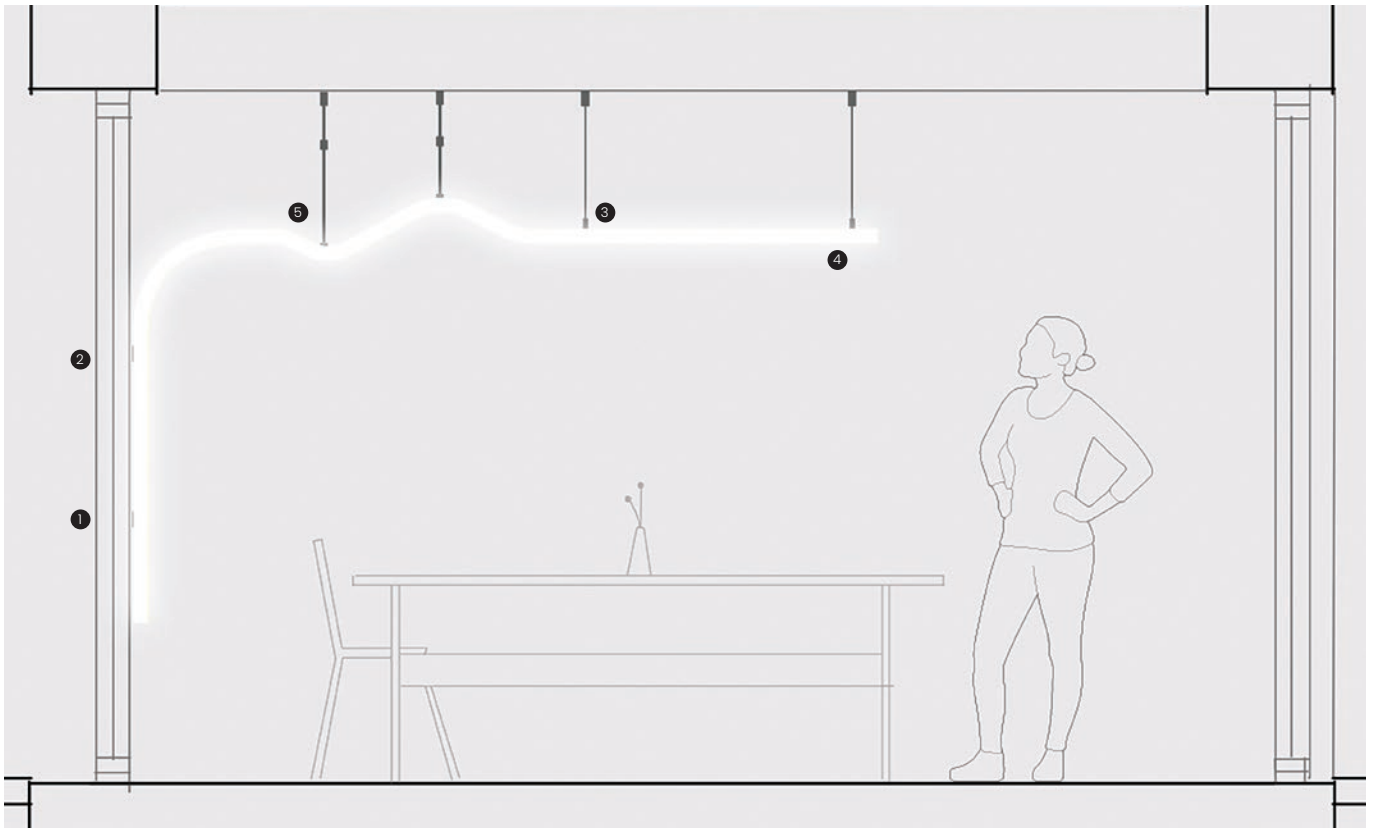

Horizontal suspended and surface options

Accessories

1



R75-03
Astrowave
surface
mounting kit

2



R75-04
Astrowave
concealed surface
mounting kit

3



R75-05
Astrowave
horizontal
suspension kit

4



R75-10
Astrowave
horizontal
suspension kit
with acrylic tube


5



R75-01
Astrowave
adjustable
solid rod
mounting kit

The IP65 flexible 360° neon light system, Astrowave is a versatile and creative lighting solution that can be used as pendant or mounted on walls and ceilings.

Explore all the possibilities by creating 25mm diameter lines of light. From ambient lighting to accent lighting, Astrowave can turn any installation to a genuine architectural creation.

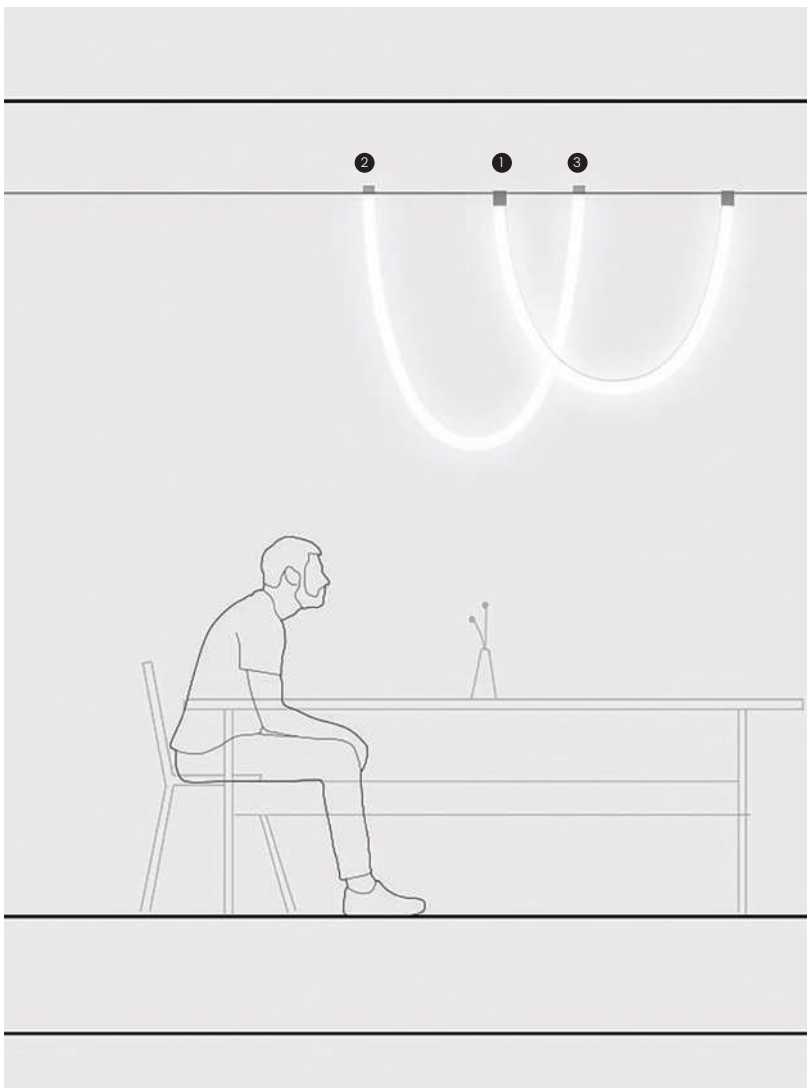

Two point mounting

Accessories

1



R75-02

Astrowave end
cap surface
mounting kit

2



R75-15


Astrowave plaster
in recessed kit

3




R75-16

Astrowave
recessed kit

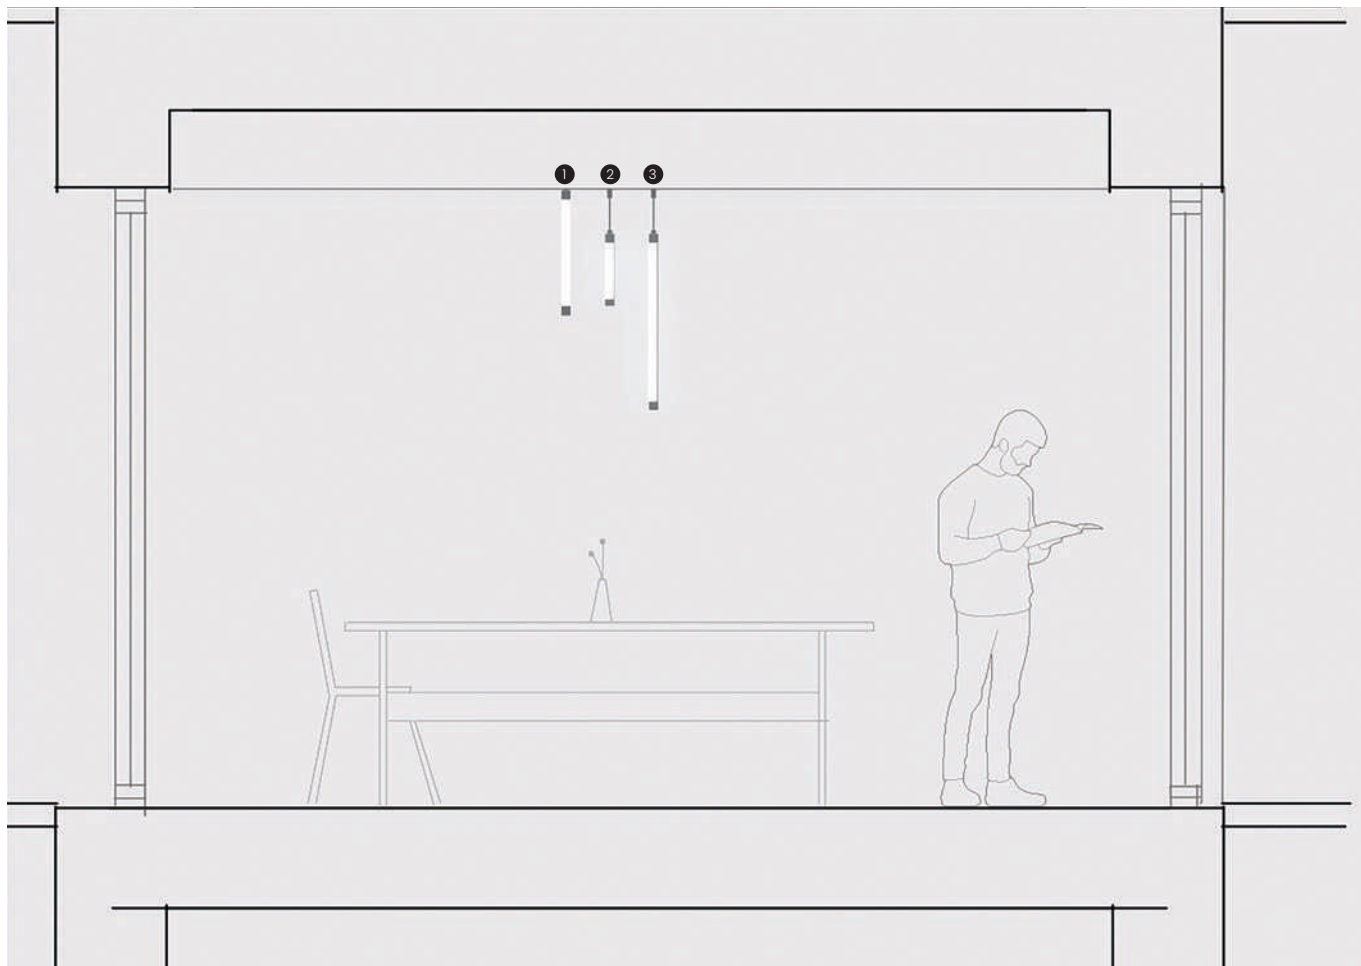


Vertical surface or suspended options

Accessories

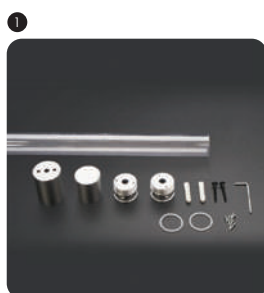

R75-06
Astrowave 1m
long linear
pendant
mounting kit

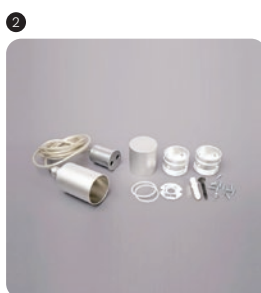


R75-08
Astrowave
vertical
suspension kit



R75-09
Astrowave
vertical
suspension kit
with 2.5m acrylic
tube



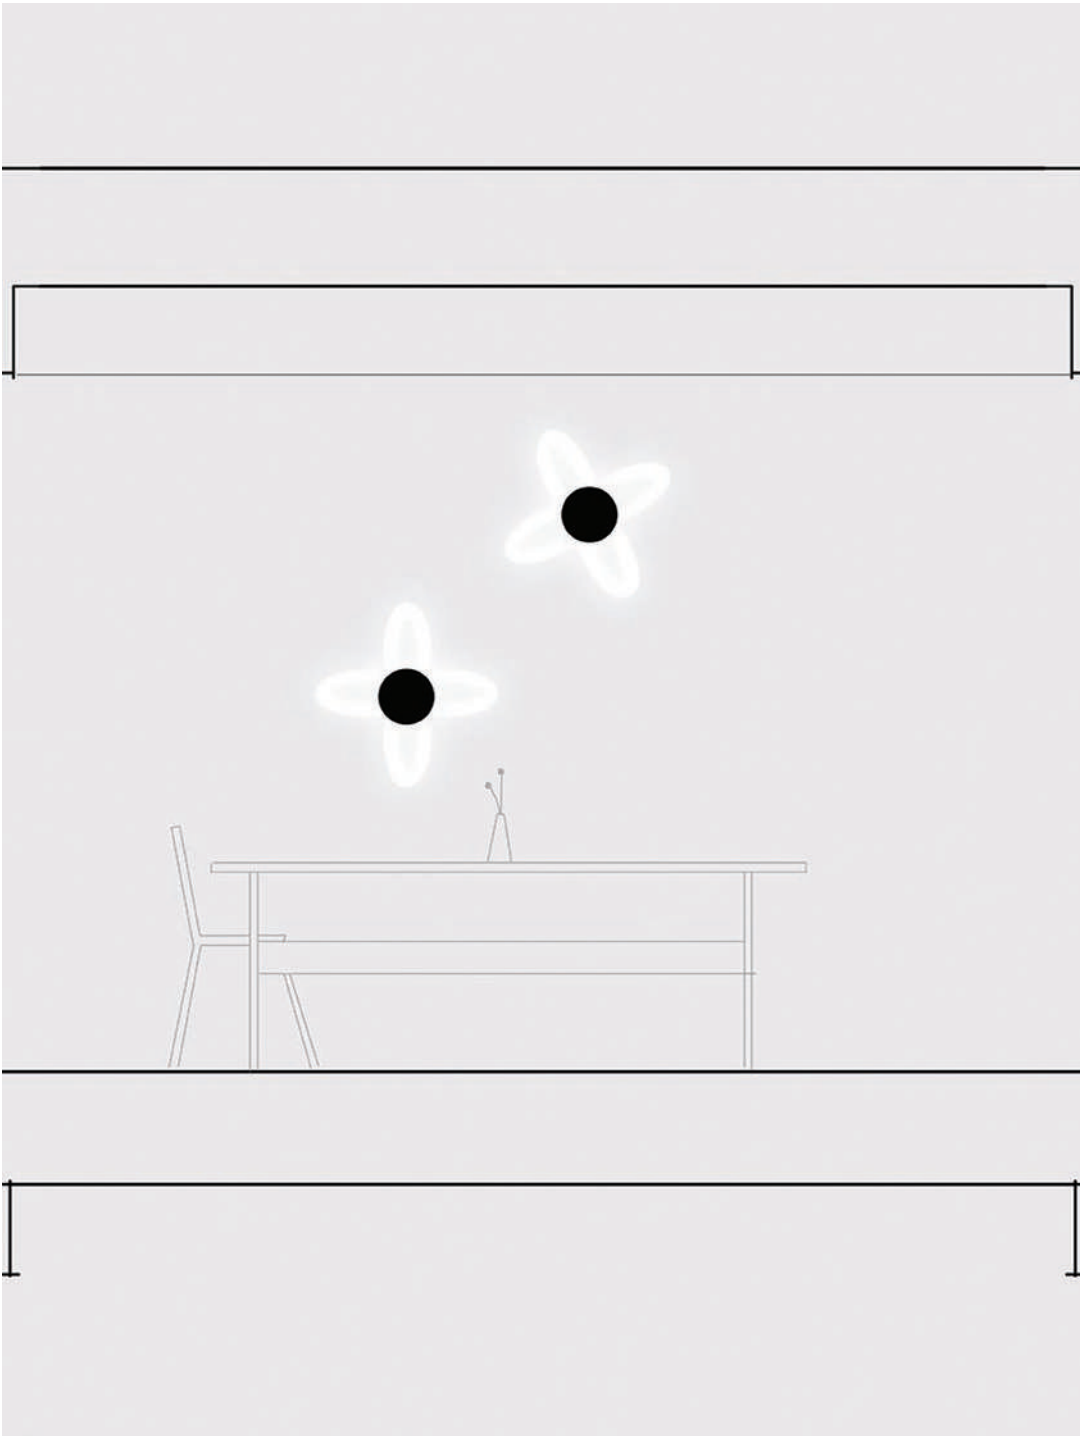

Decorative mounting

Accessories



R75-12
Astrowave
node plate



R75-13
Astrowave
single node



R75-14
Astrowave
double node




R75-17
Astrowave
horizontal
suspension
connection



R75-07
Astrowave
Connection kit

Neon Flex



Neon Flex is a flexible and creative 12mm wide sleek smooth light line that can flow and flex to create unique light shapes. Suitable for indoors or outdoors applications, IP66 as standard with an option of IP68 as a special order. Available as top or side bend.



Dimensions in mm




Wattage	12W
Lumen	700lm/m
Finish	PVC
Kelvin	3000K
CRI	>80 Ra
Beam Angle	180°
Operating Hours	50,000
SDCM	≤4
L70 B50	100,000 hours

IP rating	01	02
	IP66	IP68

Options	/DH	/DD	/DL	/DSI
	Mains dimings	DALI dimming	0-10V dimming	DSI dimming

Code Example R710101/DD- 5000mm Neon flex IP66 with DALI dimming. Full part code breakdown on page 65.






Aeroline series includes unobtrusive mini LED light lines boasting an ultra slim 8mm profile and only 18mm width. Ideal for under cabinet kitchen lighting, retail, display or refrigeration lighting, the series features a number of options to explore.



Dimensions in mm



Finish	Aluminium
Kelvin	3000K / 6000K
CRI	>82 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP20


Length

01 150mm length	02 300mm length	03 600mm length	04 900mm length	05 1000mm length
Efficacy 84Lm/W	Efficacy 75Lm/W	Efficacy 70Lm/W	Efficacy 71Lm/W	Efficacy 70Lm/W
Wattage 2.5W	Wattage 5W	Wattage 9W	Wattage 14W	Wattage 15W

06 1200mm length
Efficacy 69Lm/W
Wattage 16W

Kelvin	01	02
	3000K	6000K

Code Example R240101- 150mm length 2.5W Aeroline in 3000K.
Full part code breakdown on page 65.

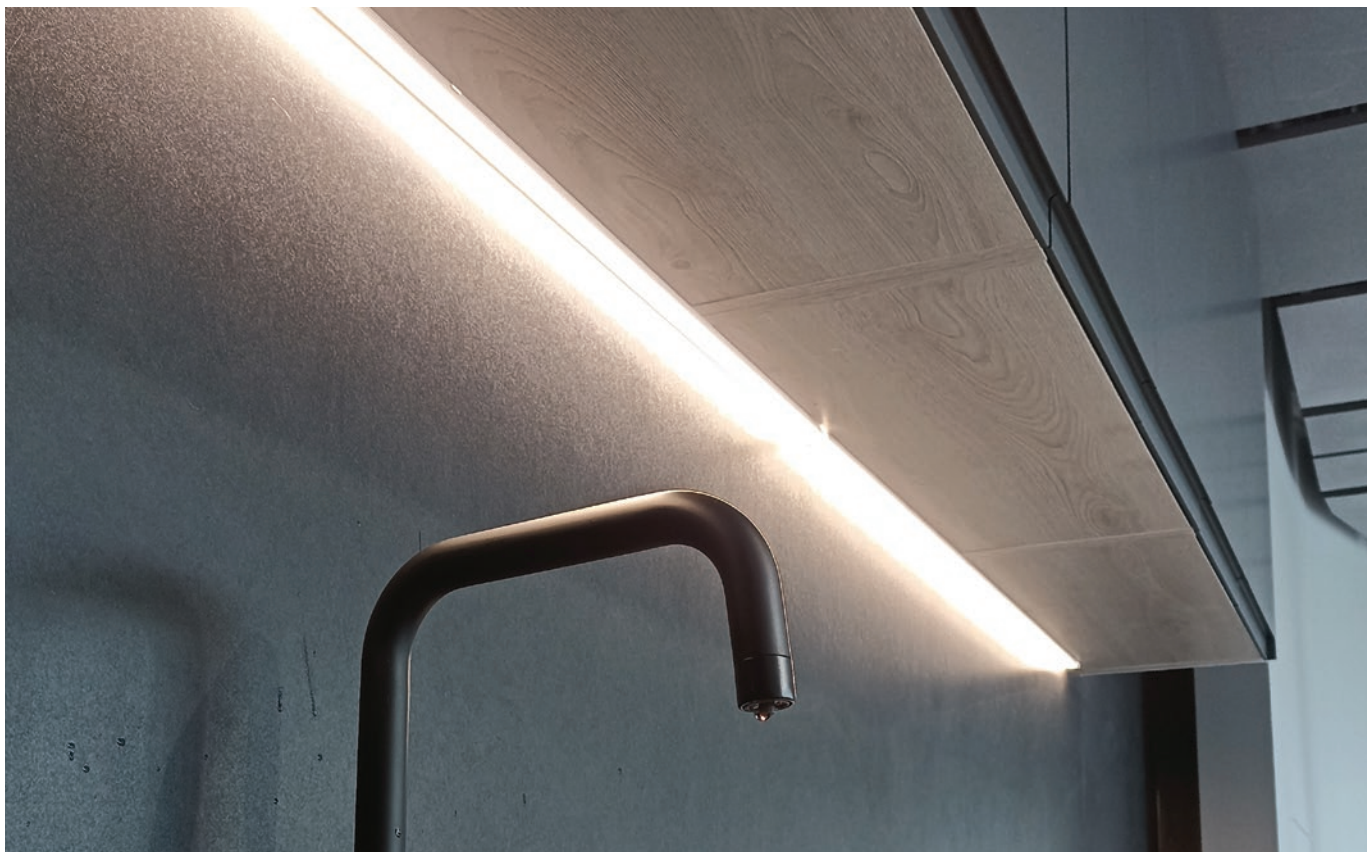

Accessories

R24-01	Fixing clip with screws, for 90° installation
R24-02	Fixing clip with screws, for 180° installation
R24-03	Middle connector
R24-04	Left 'L' corner connector
R24-05	T' corner connector
R24-06	'4' corner connector
R24-07	Right 'L' corner connector
R24-08	Solid 'L' corner connector
R36-09/2.5M	Input power line
R36-10	1m extension cable
R36-11	Hand by hand connector
R36-12	1 v 4 adaptor junction cable
R36-13	Touch switch
R36-14	Sensor switch
R36-15	Dimmer switch
R36-16	End cap
R36-17	Magnet, metal plate and 3M tape
R36-18	Side power entry point

Photo: **Studio Power, Architect Offices** in Salford.

COB Ricostrip


A COB LED strip offering IP20 or IP65 options. The flexible light strip is available in four colour temperatures as low as 2700K and up to 6500K with a maximum of 1000 lumens per metre and 104 lumens per watt. Ricostrip is versatile and ideal for many different decorative lighting applications.

5 YR
WARRANTY




Dimensions in mm

IP20



IP65




CRI	>82 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours

Kelvin	/27K	/3K	/4K	/65K
	2700K	3000K	4000K	6500K
IP Rating	/IP20	/IP65		
	IP20 rating	IP65 rating		
Size	/XM			
	X=metres needed			
Options	/CC	/DD	/DL	/DSI
	CASAMBI controls	DALI dimming	0-10V dimming	DSI dimming

Accessories



R08-01
Ricostrip Straight
Electrical
Connector




R08-02
Ricostrip L
Electrical
Connector

Code Example R081010/4K/IP65/3M/CC - Ricostrip COB 4000K IP65, 3m size Casambi control. Full part code breakdown on page 65.

SMD Ricostrip

A SMD LED strip offering a standard or high output version. The high output comes in IP20 or IP65 options. The flexible light strip is available in five colour temperatures as low as 1900K and up to 6000K with a maximum of 1630 lumens per metre and 127 lumens per watt. Ricostrip is versatile and ideal for many different decorative lighting applications.

Dimensions in mm

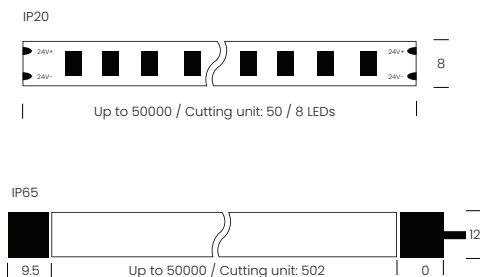

CRI	>82 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours

Kelvin	/19K	/23K	/3K	/4K	/6K
	1900K	2300K	3000K	4000K	6000K

Output	/SO	/HO
	10.8W/M	13W/M

IP Rating	/IP20	/IP65
	IP20 rating	IP65 rating (Only available for High Output)

Size	/XM
	X=metres needed

Options	/CC	/DD	/DL	/DSI
	CASAMBI controls	DALI dimming	0-10V dimming	DSI dimming

Code Example R081020/6K/HO/IP65/3M- Ricostrip SMD 6000K high output IP65, 3m size. Full part code breakdown on page 66.

5 YR
WARRANTY



Accessories



R08-01
Ricostrip Straight
Electrical
Connector



R08-02
Ricostrip L
Electrical
Connector

Prosperity 24/7 HQ, workspace in Jersey.



At Prosperity 24/7 HQ, RICOMAN supplied **Flow Downwards Ring** pendants, tailored to suit both suspended and surface-mounted configurations.

These sleek and modern fixtures provided efficient illumination, enhancing the workspace with a blend of style and functionality.







Pendant lighting

R3617_---

Flow Ring downwards lighting



A modern pendant or surface mounted ring luminaire in 0.8m or 1.5m diameter. Suitable for use in different environments, it can be used as a single luminaire or in combination for general and feature lighting. It is available with outwards, inward and downwards lighting in white, black or silver finish and 3000K, 4000K and RGB.

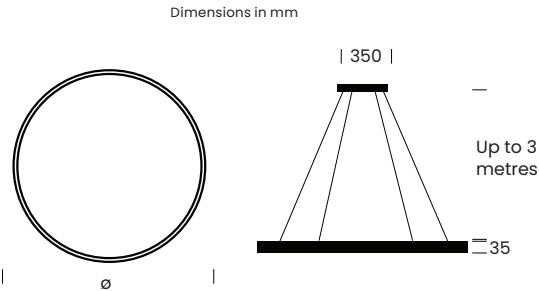

Efficacy	57lm/W
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Size	80	150
Size	ø835 x 35 x 35	Size ø1535 x 35 x 35
Wattage	50W	Wattage 90W

Colour



/BK
Black finish



/WT
White finish



/SV
Silver Finish

Kelvin	/3K	/4K	/RGBW
	3000K	4000K	RGBW


Code Example R3617150/BK/3K - Black 1535mm Ring Lighting Downwards 90W in 3K
Full part code breakdown on page 50.



Prosperity 24/7 HQ, workspace in Jersey.
Product: Flow Downward Ring Pendant

R3637_---


Flow Ring inwards lighting



A modern pendant or surface mounted ring luminaire with inwards lighting direction. Suitable for use in different environments, it can be used as a single luminaire or in combination for general and feature lighting. It is available in white, black or silver finish and 3000K or 4000K.



Dimensions in mm

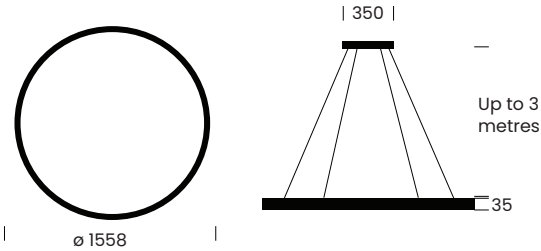

Efficacy	57Lm/W
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Size **150**

Size	ø1558 x 35 x 35
Wattage	99W

Colour



/BK	/WT	/sv
Black finish	White finish	Silver Finish


Kelvin	/3K	/4K
	3000K	4000K

Code Example R3637150/WT/3K - Flow inwards ring in white finish and 3000K
Full part code breakdown on page 50.



R3627_---


Flow Ring outwards lighting



A modern pendant or surface mounted ring luminaire with outwards lighting direction. Suitable for use in different environments, it can be used as a single luminaire or in combination for general and feature lighting. It is available in white, black or silver finish and 3000K or 4000K.



Dimensions in mm

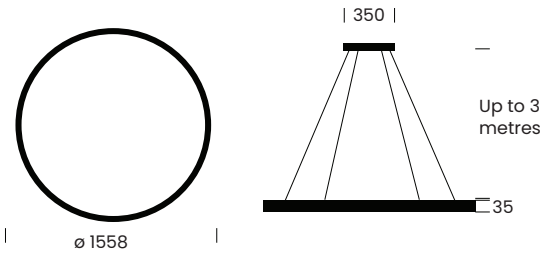

Efficacy	57Lm/W
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Size	150
Size	ø1558 x 35 x 35
Wattage	99W

Colour



/BK
Black finish

/WT
White finish

/sv
Silver Finish

Kelvin	/3K 3000K	/4K 4000K
--------	--------------	--------------


Code Example R3627150/WT/3K - 1558mm Ring Lighting Outwards in white finish and 3000K
Full part code breakdown on page 50.




Sounds Like Light

acoustic lighting.

R64_____

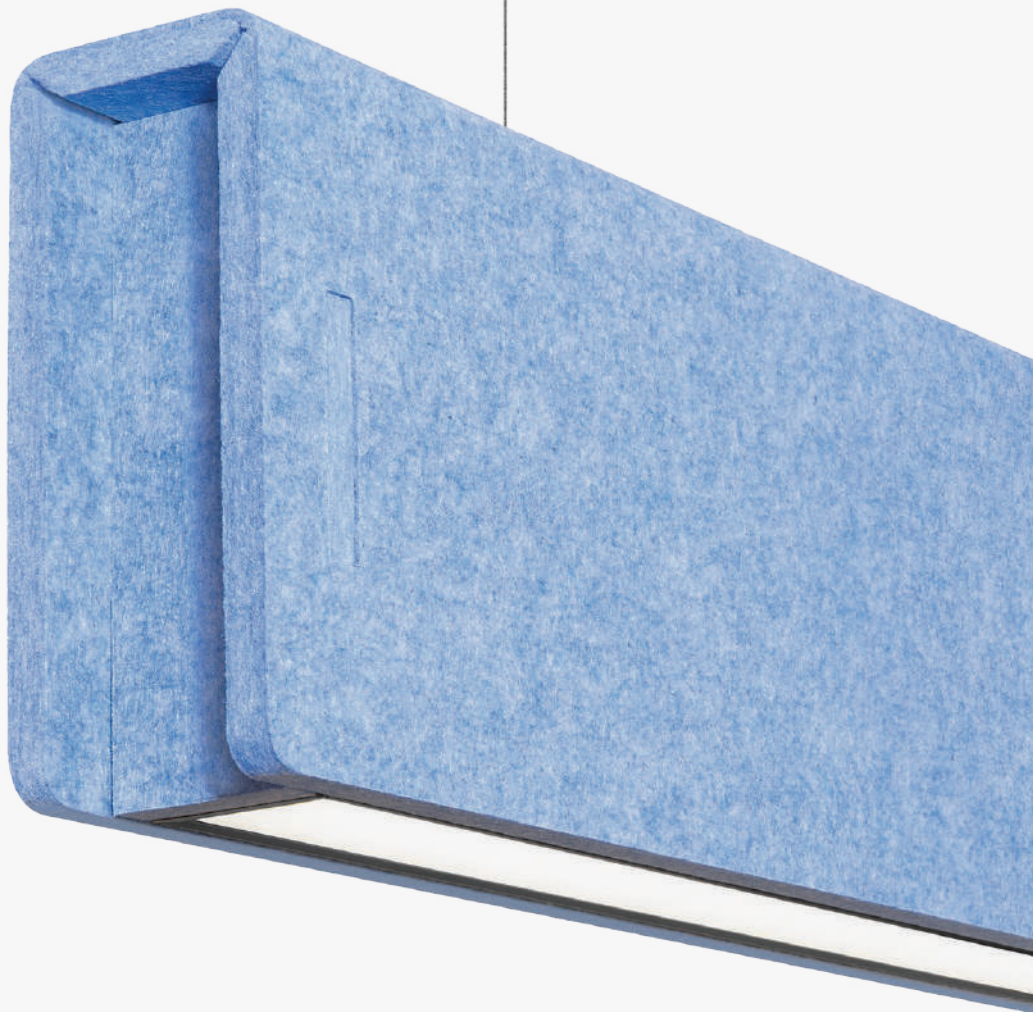


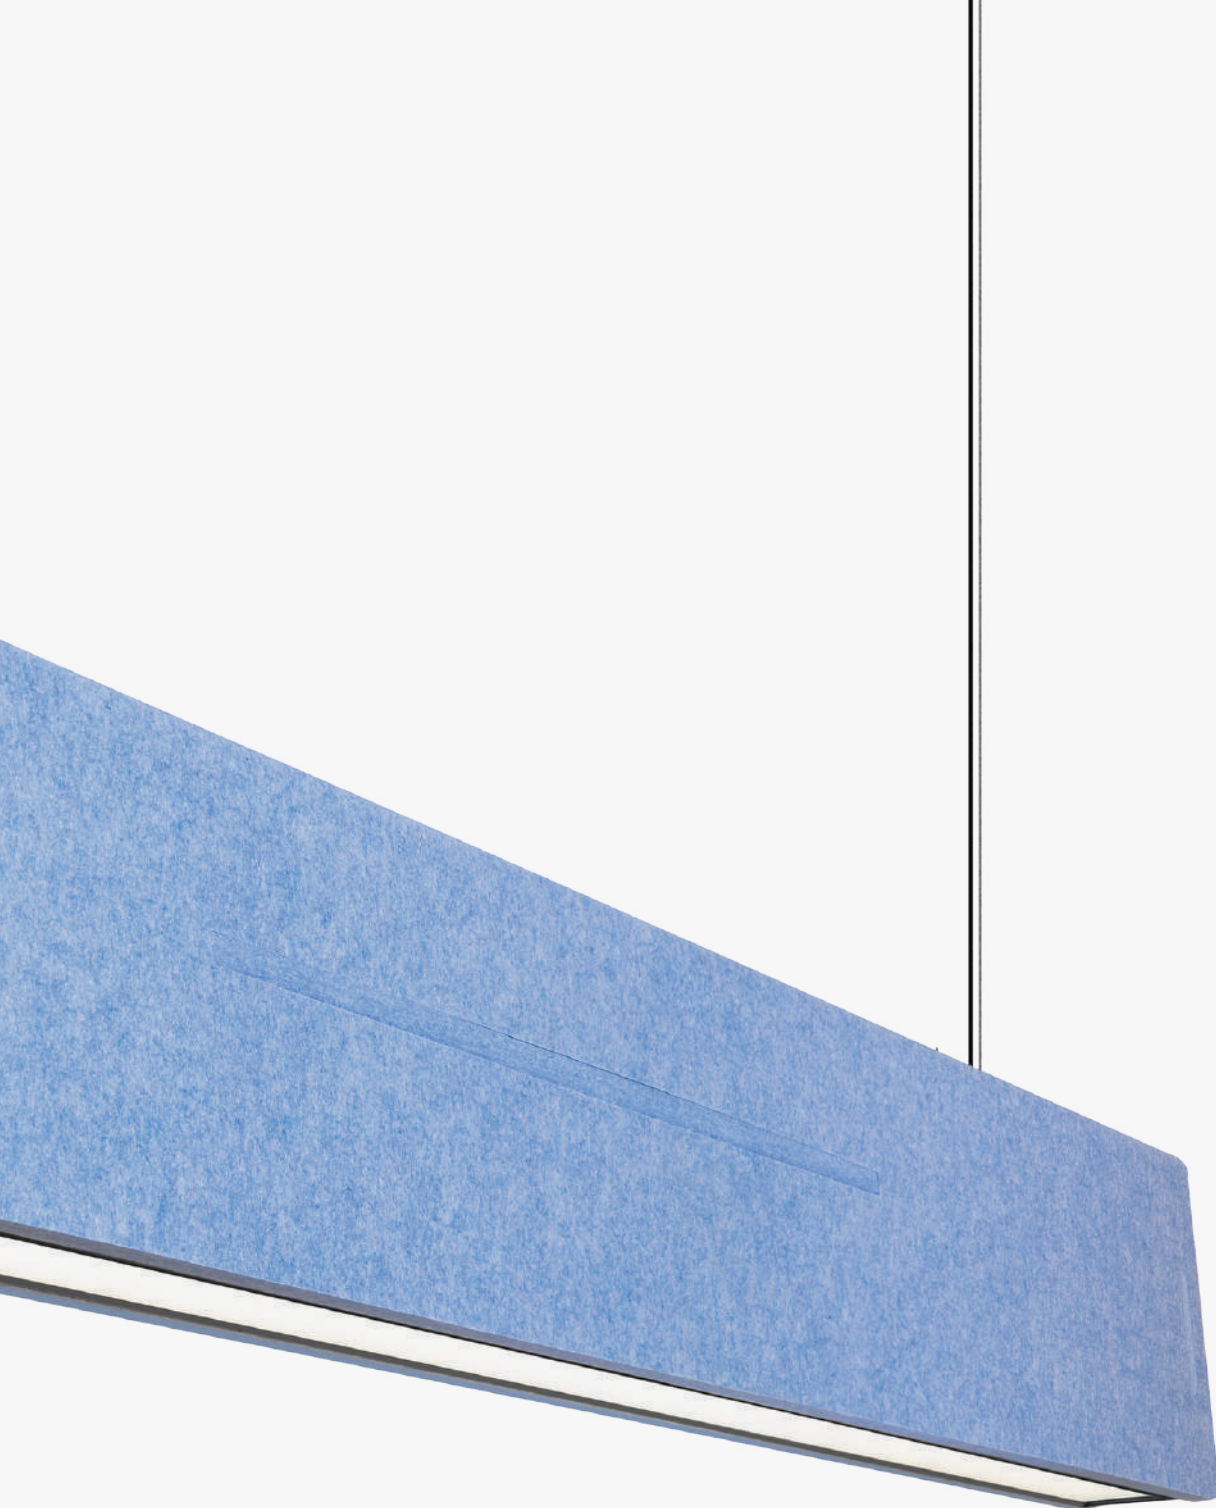

A **sound absorbing** eco-friendly linear lighting solution. Sounds Like Light has an OEKO-TEX® certification and Class A absorption. Explore a stunning selection of 22 colours available in four linear lengths, from 607mm to 2204mm.



Sounds Like Light baffles are classed as **Class A** absorption. NRC (Noise Reduction Coefficient) is a measure, represented as a decimal between 0 and 1, that indicates how well a material absorbs sound. Higher values, closer to 1, signify better sound absorption. NRC is commonly used to assess and compare the acoustic performance of materials, with higher values being preferable in environments where reducing reverberation and improving speech intelligibility are key.

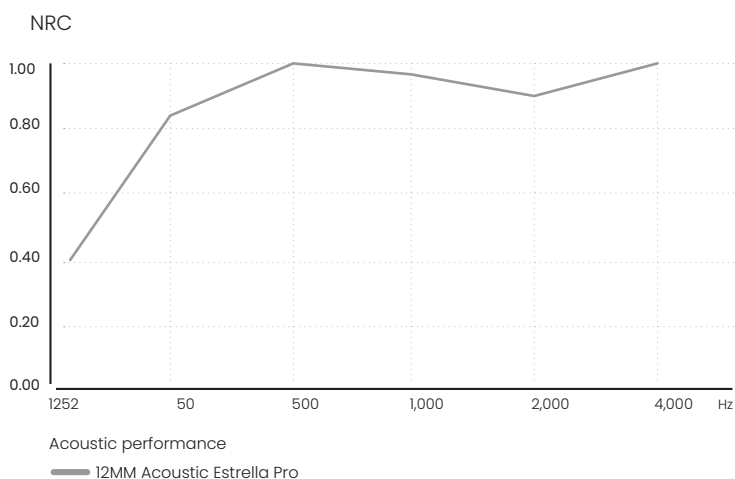



Size

05

Short Baffle

Size	L607 x W78 x H160
Wattage	14W

11

Medium Baffle

Size	L1139 x W78 x H160
Wattage	28W

16

Long Baffle

Size	L1672 x W78 x H160
Wattage	42W

21

Extra Long Baffle

Size	L2204 x W78 x H160
Wattage	56W

Model



00

Baffle Only



01

Baffle and Light with Opal Diffuser

Efficacy	125Lm/W
Beam Angle	100°



02

Baffle and Light with Square Aperture Diffuser

Efficacy	125Lm/W
Beam Angle	90°



03

Baffle and Light with Round Aperture Diffuser

Efficacy	125Lm/W
Beam Angle	50°



04

Baffle and Light with Wallwash Diffuser

Efficacy	116Lm/W
Beam Angle	60°



05

Baffle and Light with Black Louvre

Efficacy	75Lm/W
Beam Angle	70°



06

Baffle and Light with Mirror Louvre

Efficacy	96Lm/W
Beam Angle	70°



07

Baffle and Light with White Louvre Diffuser

Efficacy	104Lm/W
Beam Angle	70°



09

Baffle and Light with UGR Diffuser

Efficacy	100Lm/W
Beam Angle	100°

Kelvin

/27K
2700K

/3K
3000K

/4K
4000K

Sounds Like Light acoustic lighting

Sounds Like Light Acoustic Baffle is a simple way to design your working environment or personal space the way you like it. With **22 standard colours** to select from, we will have the right colour and design for you.

Colour Finish




Code Example

R641107/SLL03/4K/28W/DD - Sounds Like Light Medium 28W Light Baffle in camel ivory finish, with white Louvre Optics, in 4000K and DALI dimming. Full part code breakdown on page 50.




Galaxia Up Ring



Galaxia is a large LED ring pendant light in black finish. With a direct and indirect light output in a modern circular design, 800mm diameter and opal polycarbonate diffuser, the luminaire guarantees no light leakage, and a softer and uniform light output. The aluminium housing provides an excellent thermal management, making Galaxia ideal for a number of different applications.



Dimensions in mm

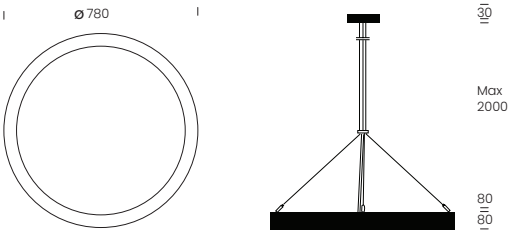

Efficacy	95 Lm/W
CRI	>90 Ra
Beam Angle	105°
Operating Hours	50,000
SDCM	≤3
IP Rating	IP20

Wattage	/35W		/70W	
	Indirect	10W	Indirect	21W
	Direct	25W	Direct	49W


Kelvin	/3K	/4K
	3000K	4000K

Options	/DD	/DL	/E
	DALI dimming	0-10V Dimming	Emergency

Code Example R820302/4K/35W - Galaxia 25W Direct 10W Indirect 4000K
Full part code breakdown on page 49.


R820401

Galaxia Triangulum



Galaxia is a large LED triangular pendant light in black finish. A modern design with an opal polycarbonate diffuser, the luminaire guarantees no light leakage, with a soft and uniform light output. The aluminium housing provides an excellent thermal management, making Galaxia ideal for a number of different applications.

Dimensions in mm

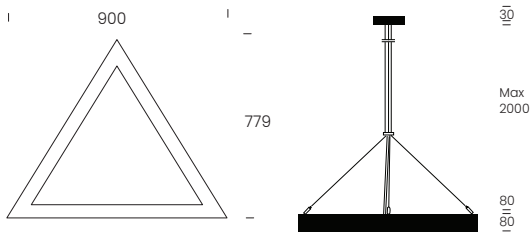

Efficacy	119 Lm/W
CRI	>90 Ra
Beam Angle	105°
Operating Hours	50,000
SDCM	≤3
IP Rating	IP20

Wattage	/20W	/40W
	20W	40W


Kelvin	Standard
	3000K / 4000K Switchable colour temperature

Options	/DD	/DL	/E
	DALI dimming	0-10V Dimming	Emergency

Code Example	R096950/3K/70W - Modus Max 70W 3000K
	Full part code breakdown on page 49.




Galaxia Hexagonal



Galaxia is a large LED ring pendant light in black finish. In a modern hexagonal design, an opal polycarbonate diffuser, the luminaire guarantees no light leakage, and a softer and uniform light output. The aluminium housing provides an excellent thermal management, making Galaxia ideal for a number of different applications.



Dimensions in mm

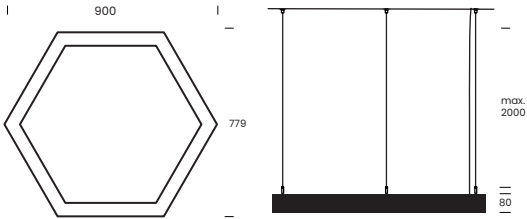

Efficacy	112 Lm/W
CRI	>90 Ra
Beam Angle	105°
Operating Hours	50,000
SDCM	≤3
IP Rating	IP20

Wattage **/30W** **/60W**
30W 60W

Kelvin **Standard**
3000K / 4000K
Switchable colour
temperature


Options **/DD** **/DL** **/E**
DALI 0-10V Dimming Emergency
dimming

Code Example R820601/30W - Galaxia 25W Direct 10W Indirect 4000K
Full part code breakdown on page 49.



Nebula is a suspended panel light with a unique design offering a 360 degree beam lighting effect. The 60W suspended office light delivers up to 6482 lumens spreading in all directions, is available in 3000K or 4000K and comes with a magnetic box for ease of installation.

Dimensions in mm

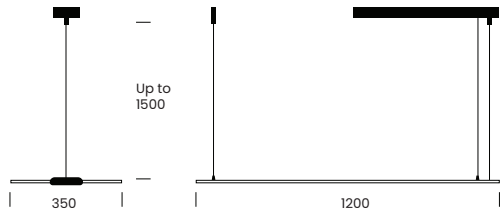

Efficacy	108 Lm/W
CRI	>80 Ra
Beam Angle	360°
Operating Hours	50,000
SDCM	≤6
IP Rating	IP20

Wattage **/60W**
60W

Kelvin **/3K** **/4K**
3000K 4000K

Options **/DD** **/E** **/DDPRO**
DALI dimming Emergency (non IP rated) DALI Addressable Emergency

Code Example R101801/ 60W/4K - Nebula 60W 4000K
Full part code breakdown on page 49.




Sounds Like Light

biophilic lighting.

R920_





FloraLume brings the serenity of nature indoors with its stunning range of biophilic pendant lights. Handcrafted in Brighton, UK, these lights feature vibrant moss and flower art encased in elegantly designed pendants. Ideal for enhancing any space with a touch of green, these lights promote a peaceful and productive environment.

CRI	>90 Ra
Operating Hours	50,000
SDCM	≤3
Power Supply	Internal Driver
IP Rating	IP20



Natural Moss

We use preserved moss, maintaining its texture without chemicals. Using only a salt water solution and food grade dye, the moss is 'frozen in time'.



Eco Friendly

All materials are sustainably sourced and contribute to reduced carbon emissions.



Low Maintenance

Designed for longevity with minimal maintenance needs. No water, soil, or direct sunlight required.



Air Quality

Naturally purifies the air, enhancing your living or workspace.



Sound Absorbing

Helps reduce noise levels, making it ideal for busy or open-plan environments.



Allergen Free

Safe for individuals with allergies, contributing to a healthier indoor climate.



Custom Layouts

Tailor your moss art to fit the unique style of your space.

Shapes





302

FloraLume Round

Wattage	70W (49W+21W)
Lumens	4658 +1996
Beam Angle	105°

Kelvin	/3K	/4K
	3000K	4000K

Dimensions in mm

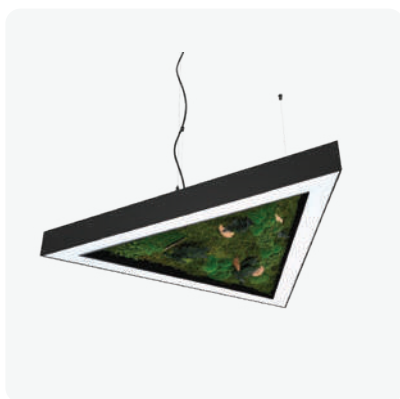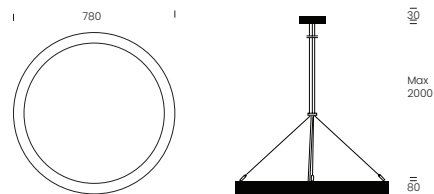


401

FloraLume Triangulum

Wattage	40W
Lumens	4621
Beam Angle	105°

Kelvin	Standard
	3000K / 4000K
	Switchable colour temperature

Dimensions in mm

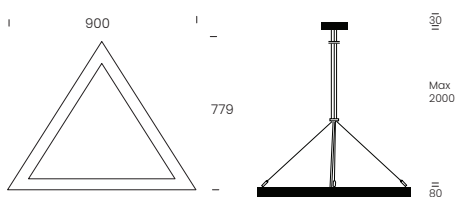


601

FloraLume Hexagonal

Wattage	60W
Lumens	6532
Beam Angle	105°

Kelvin	Standard
	3000K / 4000K
	Switchable colour temperature

Dimensions in mm

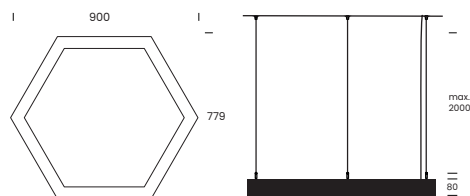

Design



/MOSS
Moss finish



/FLOMOSS
Flower moss finish



/FUNMOSS
Fungi moss finish

Code Example

R920601/60W/Moss - FloraLume Hexagonal 60W Switchable 3000K-4000K with moss finish
Full part code breakdown on page 50.

Moon circular feature light.

R920_---





Moon is a bold **direct/indirect** feature light that can be surface mounted or used as a pendant.

It is available in two sizes: the powerful 875mm diameter Supermoon and its baby brother Minimoon at 585mm diameter. Moon boats a **switchable colour temperature** where the installer can select 3000K, 4000K or 5000K light which is delivered via a microprismatic glare control diffuser.

Efficacy	110 Lm/W
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Models




5 YR
WARRANTY

01 MiniMoon

Wattage	/38W	/48W
	38W	48W


Dimensions in mm

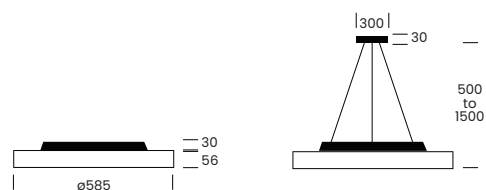

02 SuperMoon

Wattage	/76W	/96W
	76W	96W

Dimensions in mm

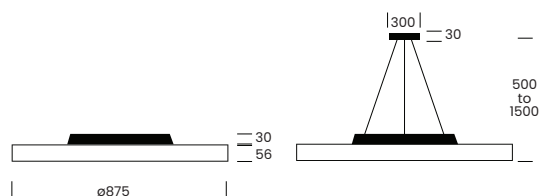

Kelvin

01

3000K

02

4000K

03

5000K

Options

/DH

Mains dimming

/DD

DALI dimming

/DL

0-10V dimming

/DSI

DSI dimming

/E

Integrated
Emergency

Accessories



R8202-SPD
Suspended
mounting kit


Code Example

R820103/38W/E - Minimoon 38W in 5000K Emergency
Full part code breakdown on page 50.

Pulsar pendant



Pulsar is a modern pendant combining efficacy with elegance. With a minimalistic, contemporary design and durable aluminium construction it can add a touch of subtle stylish architectural lighting in domestic or commercial spaces. The same style luminaire is also available in surface mounted, recessed and track mounted version.

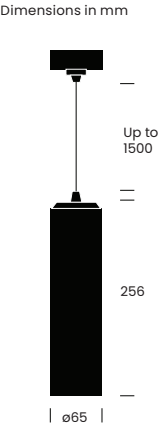

Wattage	10W
Efficacy	90 Lm/W
CRI	>90 Ra
Beam Angle	38° Standard
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

- Kelvin

/3K
3000K

Standard
4000K

- Colour



/BK
Black finish



/WT
White finish

- Beam angle

/15
15 degree beam angle

/24
24 degree beam angle

Standard
38 degree beam angle

/55
55 degree beam angle

Code Example R096201/3K/BK - Pulsar pendant 10W, 38° beam angle in 3000K in black. Full part code breakdown on page 50.



The Oche Club, darts bar in Jersey.
Product: Pulsar Pendant

The Freedom Centre, cinema building in Jersey.

RICOMAN proudly completed a dynamic lighting project for a new church in the heart of St. Helier, Jersey, repurposing an old Odeon cinema. The brief required a flexible lighting scheme with dimmable lines of light, both recessed and suspended in the varied ceiling heights. Our design team rose to the challenge, creating a clever solution for the curved lower ceiling by incorporating customisable **Endor downlights** with Titanium reflectors, perfectly complementing the dark grey/black finish.

Thanks to our technical team, the project seamlessly navigated around the structural steel beams, ensuring optimal results.





The Freedom Centre in Jersey
Client: LED Lighting Jersey & Photos: LED Lighting Jersey




Downlights

Neptune low-glare IP65 downlight

Neptune is an ideal low-glare IP65 downlight for a PL replacement available with a range of magnetic reflector options which are available in polished chrome, white, matte silver or titanium finish. Neptune comes in four cutout sizes and a range of wattages from 8W to 32W.



Dimensions in mm

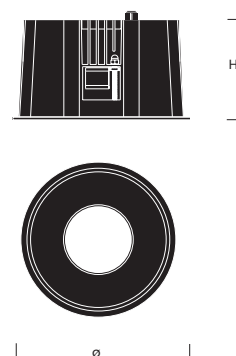


Efficacy	106Lm/W
CRI	>90 Ra
Beam Angle	55°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP65

Model	10	15	17	20
Size	ø110 x H62	Size ø165 x H90	Size ø180 x H100	Size ø218 x H113
Cut out	100	Cut out 150	Cut out 170	Cut out 200

Wattage	/8W	/16W	/12W	/22W	/13W	/26W	/16W	/32W
	100mm cut out model	100mm cut out model	150mm cut out model	150mm cut out model	170mm cut out model	170mm cut out model	200mm cut out model	200mm cut out model


Reflectors

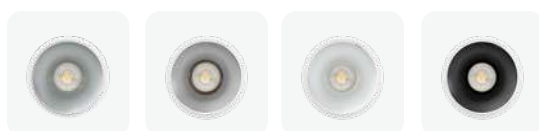

/MS	/PC	/WT	/TI
Matte silver	Polished chrome	White	Titanium


Kelvin	/3K	/4K
	3000K	4000K

Code Example R093110/3K/8W/100MS - Neptune 100mm Downlight with Matte Silver Reflector 8W 3000K
Full part code breakdown on page 54.

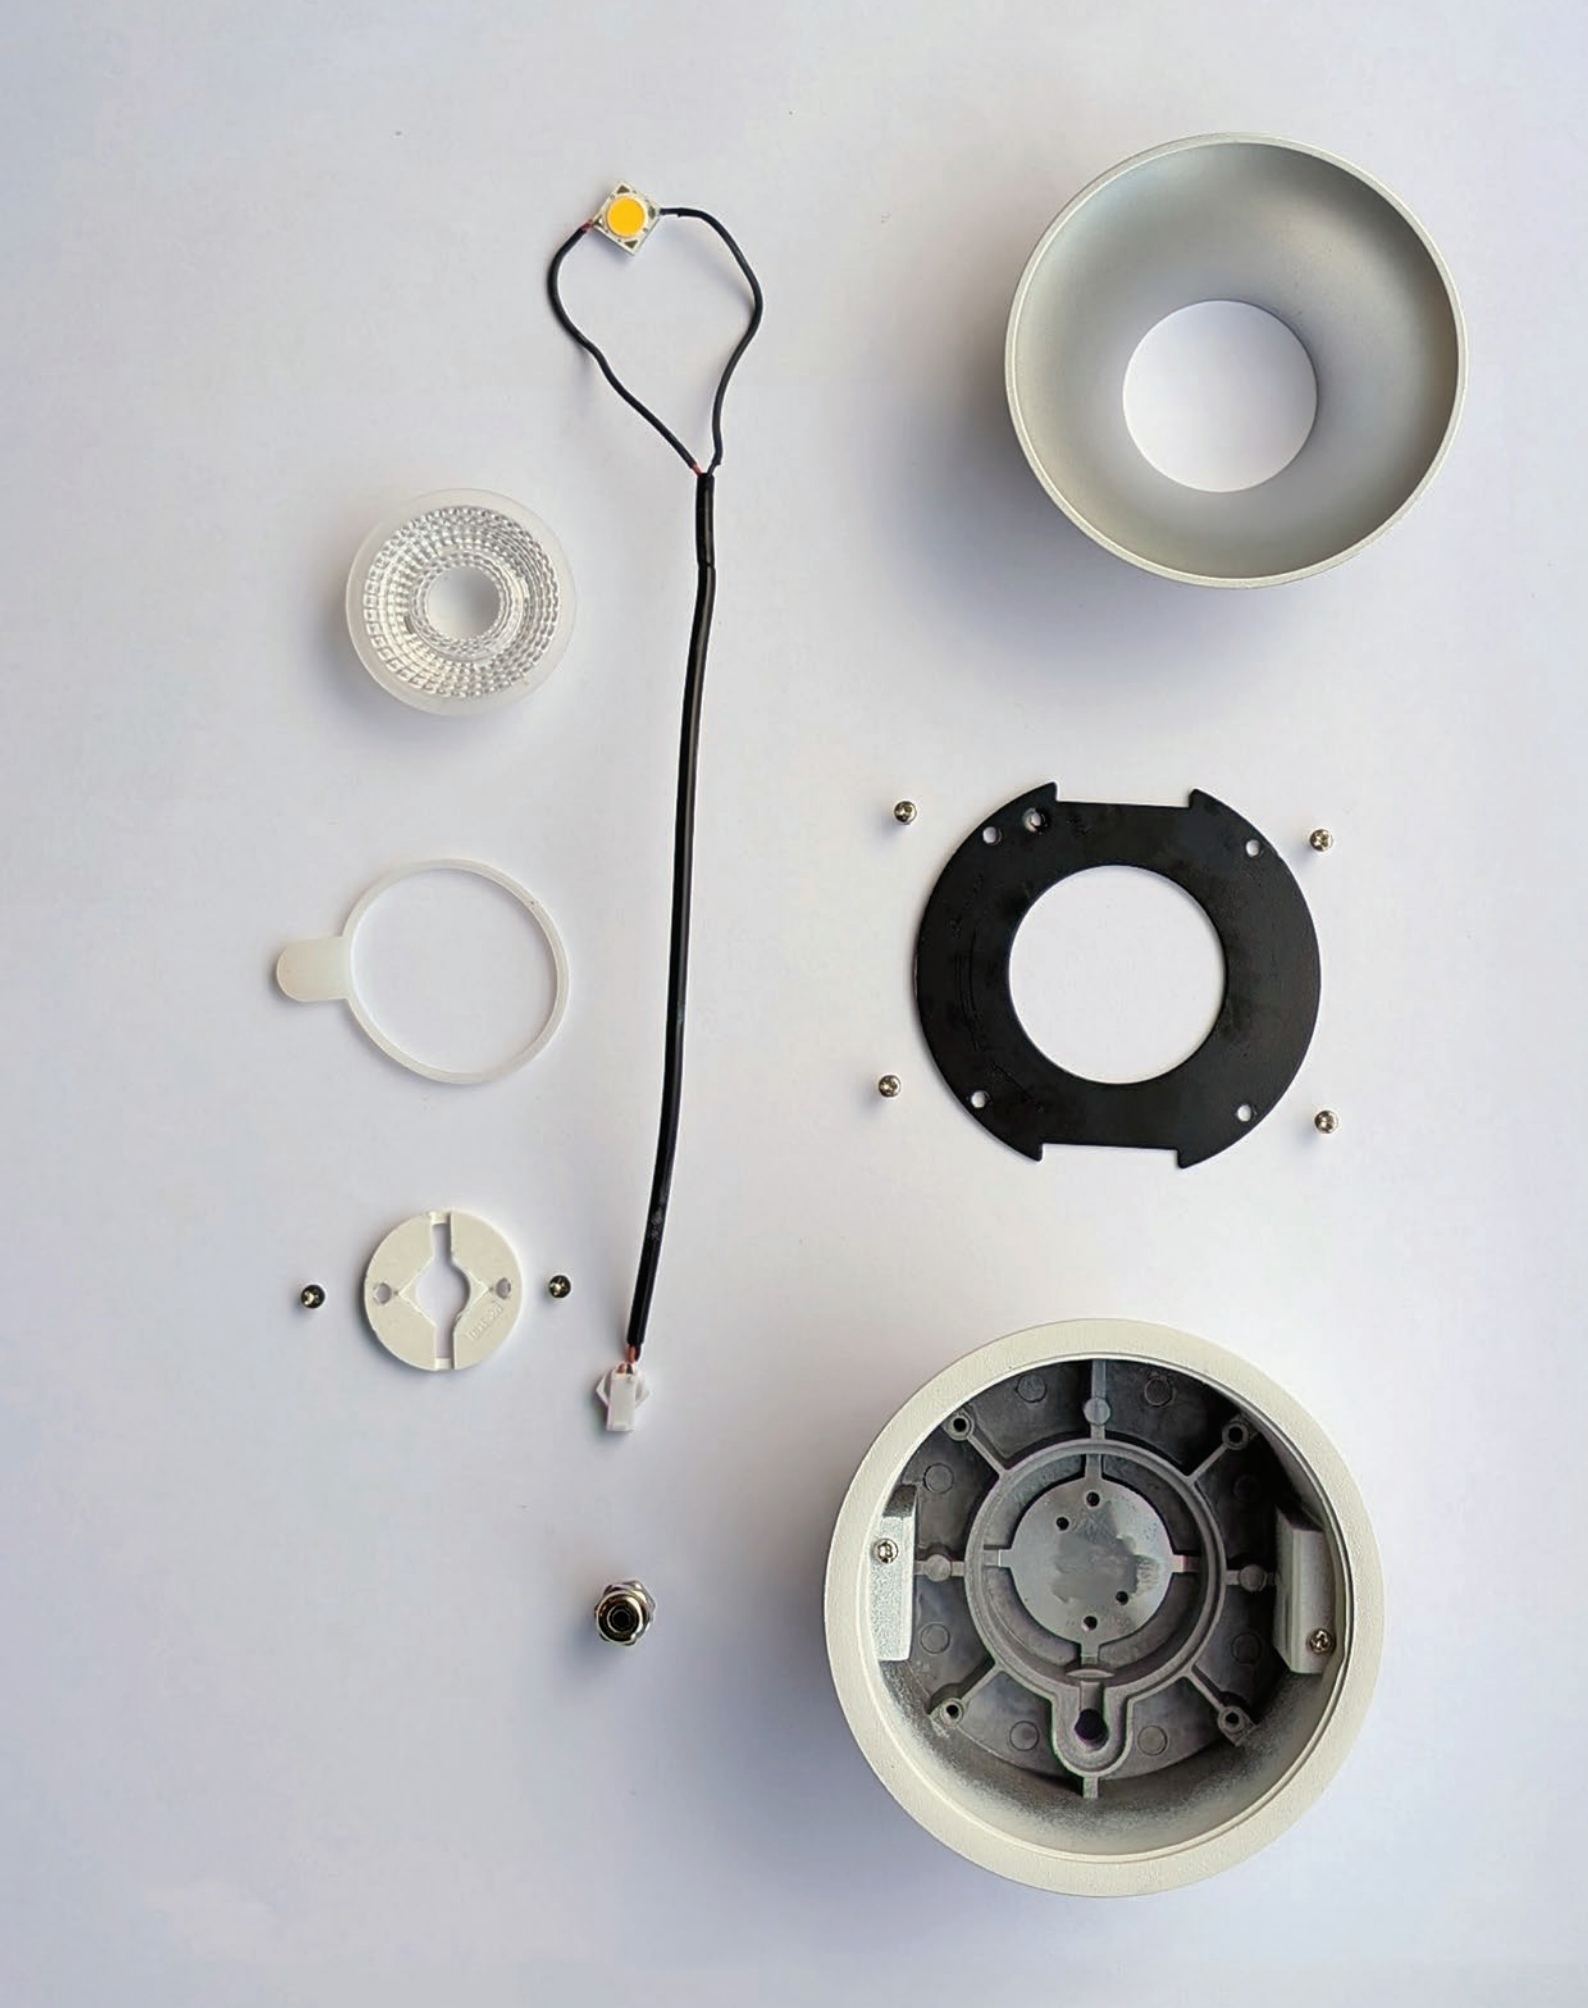



E-Pro architectural downlights.

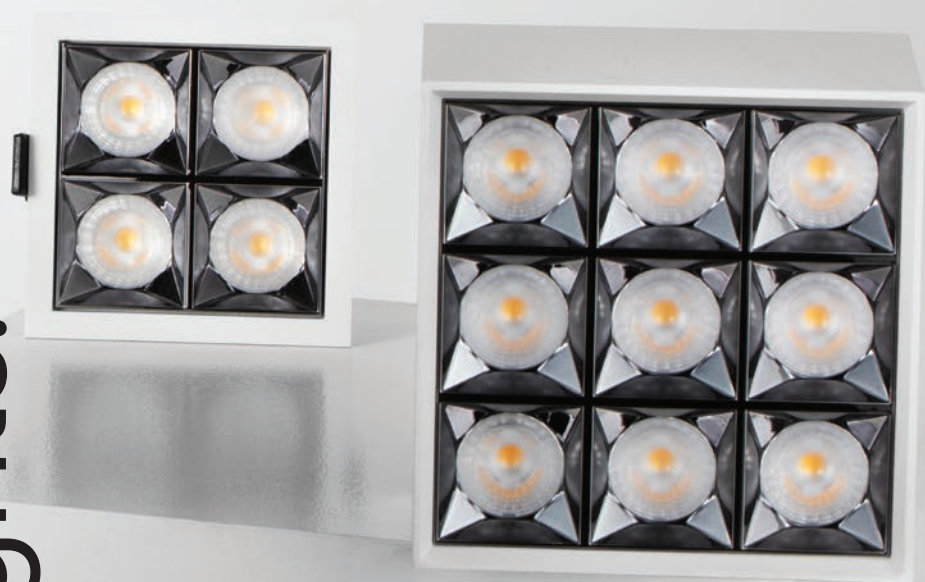

E-Pro architectural downlights




Efficacy	106 lm/W
CRI	90 Ra
Beam Angle	50°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20



E-Pro is a range of linear or square cellular downlights available in a variety of cell configurations & mounting options.

The family features revolutionary optics combined to deliver an extremely **low glare** rating and architectural styling.

Mounting options



36
Surface mounted



37
Recessed

Colour



/BK
Black finish



/WT
White finish

E-Pro architectural downlights



Cell options



01

Model	Single cell
Recessed size	54x54x47
Cut Out	50x50
Surface size	49x49x83



03

Model	1x3 cells
Recessed size	130x54x47
Cut Out	125x50



05

Model	1x5 cells
Recessed size	206x54x47
Cut Out	200x50




10

Model	1x10 cells
Recessed size	396x54x47
Cut Out	390x50



22

Model	2x2 cells
Recessed size	93x93x47
Cut Out	88x88
Surface size	86x86x88



33

Model	3x3 cells
Recessed size	131x131x47
Cut Out	125x125
Surface size	125x125x88

Wattage

For 1x1 cell	For 1x3 cell	For 1x5 cell	For 1x10 cell	For 2X2 cell	For 3X3 cell
/5W	/6W	/10W	/20W	/8W	/18W
	/12W	/20W	/40W	/16W	/36W

Kelvin

/27K	/3K	/4K
2700K	3000K	4000K

Options

/DH	/DD	/DL	/DSI
Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example R093722/8W/BK/3K - E-Pro Recessed 2x2 cells 8W in black in 3000K
Full part code breakdown on page 54.

R098900

Core IP65 fire rated with switchable kelvin




Core is a 30/60/90 min fire rated downlight, tested with I-joist ceilings. It is switchable 3000K or 4000K via a dip switch at the front (behind bezel) and has an IP65 front. Core comes with an integrated dimmable driver and interchangeable bezels as optional.



5 YR
WARRANTY

Dimensions in mm

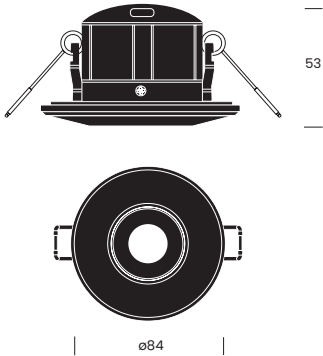

Wattage	6W
Lumens	602
Kelvin	3000K-4000K Switchable
CRI	>90 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	≤6
L70 B50	50,000 hours
IP Rating	IP65

Bezel options



R098-01
Core Chrome
Bezel



R098-12
Core Metal
Brushed Chrome
Bezel



R098-03
Core Black Bezel

Code Example R098900 - Core 6W 3000K | 4000K switchable Mains Dim with white bezel
Full part code breakdown on page 63.


Accessories

R098-01	Core chrome bezel
R098-03	Core black bezel
R098-12	Core metal brushed chrome bezel



The epitome of a fire rated IP65 all-in one downlight. R3 comes in tunable or fixed colour temperature. A wall switch can be used to change colour temperature and dim to night mode. A remote control can smoothly dim and change from 3000K through to 5000K. R3 offers a variety of four different bezels to suit a range of different installations.

Dimensions in mm

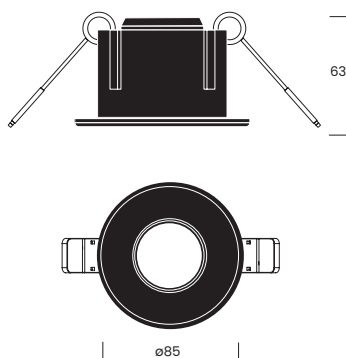

Wattage	6W
Lumens	591
Kelvin	Tunable from 3000K to 5000K
CRI	>90 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	±6
L70 B50	50,000 hours
IP Rating	IP65



Kelvin	/TW	/3K	/4K
	Tunable white 3000K-5000K	3000K	4000K

Options	/DD	/DL	/DSI
	DALI dimming	0-10V dimming	DSI Dimming

Bezel options



Standard	R095-01	R095-02	R095-03
White bezel	R3 chrome bezel	R3 metal brushed chrome bezel	R3 black bezel

Code Example R095601/TW- R3 6W Tunable White 3000K-5000K Control Dim
Full part code breakdown on page 54.

Accessories

R095-01	R3 chrome bezel
R095-02	R3 brushed chrome bezel
R095-03	R3 black bezel
R09-882	Remote control for r3/centorio


Pinnacle spot



Pinnacle is a fixed mini spot light ideal for prestigious applications. The standard 15° or the optional 38° / 55° degree beam angles serve to achieve the desired spot lighting effect. The opal diffuser guarantees a smooth light distribution with low UGR and the titanium reflector adds a discrete contemporary decorative touch.



Dimensions in mm



Wattage	6W
Efficacy	100 Lm/W
Kelvin	3000K
CRI	>90 Ra
Beam Angle	15° Standard
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Beam angles	standard	/38D	/55D
	15 degree angle	38 degree angle	55 degree angle

Kelvin	standard	/27K
	3000K	2700K

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example R097701/55D- Pinnacle 6W 3000K 55° beam
Full part code breakdown on page 55.

Accessories



R09-HC40
Honeycomb
Diffuser



Endor customisable downlights.

R0966_-----



The concept behind Endor was to enable you to create **diverse lighting environments using one luminaire range**, for a consistent style throughout. Endor allows designers to work with different lighting applications, light outputs, beam angles, housings, reflectors and finishes, using unobtrusive and low glare fixtures.

R0966_----- **Endor** customisable downlights




Efficacy	100 Lm/W
CRI	90 Ra
Operating Hours	50,000
SDCM	±3
L70 B50	100,000 hours
IP Rating	IP20 / IP65



The Endor collection features a wide range of recessed lighting fixtures, combining a discreet presence with high performance. You can choose your housing from square, round or trimless round.

Beam angles options are 15°, 38° or 55°. Downlight or wallwash reflectors are available in Titanium, Polished Chrome or Matte Silver finishes.

Wattage



A1

Wattage	12W
Total depth	112mm




A2

Wattage	24W
Total depth	140mm



A3

Wattage	32W
Total depth	169mm



A4

Wattage	42W
Total depth	184mm

Beam angle

For 12W

B1	15°
B2	38°
B3	55°

For 24W

B3	15°
B4	38°
B5	55°

For 32W

B6	15°
B7	38°
B8	55°

For 42W

B9	15°
B10	38°
B12	55°

Endor is designed for the **circular economy**, with a long lifespan, modular design, and recyclable aluminium. Its durable components, including LED modules and Tridonic drivers, ensure over 50,000 hours of use. Replaceable parts extend its life, reducing waste and supporting sustainability.

Housing



Round			Round Rimless			Square			IP65 round			IP65 square		
Code	Wattage	Cut-out	Code	Wattage	Cut-out	Code	Wattage	Cut-out	Code	Wattage	Cut-out	Code	Wattage	Cut-out
C1	12W	ø75	C2	12W	ø75	C3	12W	75x75	C4	12W	ø75	C5	12W	75x75
C6	24W	ø100	C7	24W	ø100	C8	24W	100x100						
C9	32W	ø125	C10	32W	ø122	C11	32W	125x125						
C12	42W	ø150	C13	42W	ø148	C14	42W	150x150						

Reflector



Round Titanium

E1	12W
E4	24W
E7	32W
E10	42W




Round Polished Chrome

E2	12W
E5	24W
E8	32W
E11	42W




Round Matte Silver

E3	12W
E6	24W
E9	32W
E12	42W




Wallwash Titanium

D1	12W
D4	24W
D7	32W
D10	42W



Wallwash Chrome

D2	12W
D5	24W
D8	32W
D11	42W



Wallwash Matte Silver

D3	12W
D6	24W
D9	32W
D12	42W




Square Titanium

F1	12W
F4	24W
F7	32W
F10	42W



Square Chrome

F2	12W
F5	24W
F8	32W
F11	42W



Square Matte Silver

F3	12W
F6	24W
F9	32W
F12	42W

Kelvin

/27K 2700K	/3K 3000K	/4K 4000K
----------------------	---------------------	---------------------

Options

/DH Mains dimming	/DD DALI dimming	/DL 0-10V dimming	/DSI DSI Dimming
--------------------------------	-------------------------------	--------------------------------	----------------------------


Code Example R0966A4B10C12D10/3K - Endor 42W 15° Round Wallwasher - Titanium Reflector in 3000K
Full part code breakdown on page 55.

Sirius high output downlight




Sirius is a recessed high output downlight with a 210mm cut out, ideal for commercial applications. Available in standard or high output, delivers up to 4418 lumens with an excellent CRI>90 Ra. Sirius comes in 3000K or 4000K and white or black finish. Emergency and dimming versions come as options to further increase flexibility.

5 YR
WARRANTY

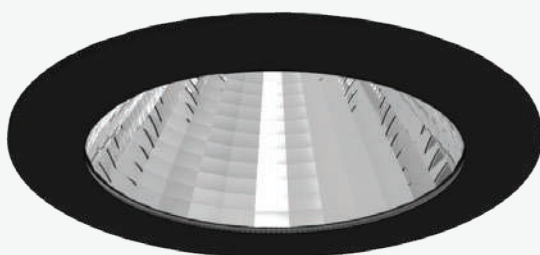

Dimensions in mm



ø230

Efficacy	105 Lm/W
CRI	>90 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Colour



/WT

White bezel



/BK

Black bezel

Kelvin

/3K

3000K

/4K

4000K

Wattage

/24W

24W

/42W

42W

Options

/DH

Mains
dimming

/DD

DALI
dimming

/DL

0-10V
dimming

/DSI

DSI dimming

Code Example


R093401/BK/3K/24W - Sirius with black bezel in 24W 3000K
Full part code breakdown on page 60.

Ultra-Slim R round slim downlight



Ideal for low ceiling voids and perfect for achieving a clean finish in any environment, Ultra-Slim is a round downlight that offers a variety of options. Five different cutouts/ wattages featuring a less than 30mm deep profile, four different colour temperatures, dimmable or non dimming standard options, emergency and a TP(a) rated diffuser as an add on, complete the series.

Dimensions in mm



Efficacy	110 Lm/W
CRI	>82 Ra
Beam Angle	90°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP54



Type	32	15
	Non Dimmable	Mains Dimmable

Size	8W	11W	15W	18W
Size	Ø 110 x 24D	Size Ø 140 x 25D	Size Ø 160 x 26D	Size Ø 180 x 27D
Cut out	95	Cut out 125	Cut out 140	Cut out 160

23W
Size Ø230 x 28D
Cut out 200

Kelvin	3000K	4000K
--------	-------	-------

Accessories



R09-23
23W ultra-slim
cut out
extension ring

Code Example Full part code breakdown on page 61.




Carina is a cost and energy efficient PL downlight replacement designed to reduce glare and deliver an excellent thermal control. To suit a variety of applications, it comes in four sizes and two colour temperatures with dimming and emergency options available.

5 YR
WARRANTY



Dimensions in mm

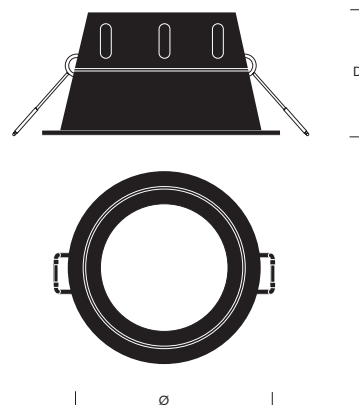

Efficacy	100 lm/W
CRI	>85 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP20

Model	01	02	03	04
Wattage	12W	12W	15W	15W
Kelvin	3000K	4000K	3000K	4000K
Size	Ø 145 x 64D	Ø 145 x 64D	Ø 160 x 74D	Ø 160 x 74D
Cut out	130	130	140	140

05	06	07	08
Wattage	18W	18W	23W
Kelvin	3000K	4000K	4000K
Size	Ø 190 x 85	Ø 190 x 85	Ø 230 x 90
Cut out	165	165	200

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Accessories



R09-23
23w ultra-slim cut out extension ring



Code Example R093302 - Carina 12W 4000K
Full part code breakdown on page 62.

Centorio all in one downlight



Fire rated dimmable downlight that changes colour temperature from warm to cool white. A wall switch can be used to change colour temperature between 3000K-4000K-5000K and dim down to night mode. A remote control is also available to smoothly dim and change from 3000K through to 5000K. Centorio has an IP65 front and comes with three different bezels as standard.

Dimensions in mm



Ø110

Wattage	12W
Efficacy	100 lm/W
Kelvin	Tunable from 3000K to 5000K
CRI	>90 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	≤6
L70 B50	50,000 hours
IP Rating	IP65



RICOMAN LIGHTING CATALOGUE EDITION 8

Bezel options



Standard
White bezel



Standard
Polished chrome
bezel



Standard
Satin nickel bezel

Code Example R098802 - Centorio 12W Fire Rated tunable white 3000K - 5000K
Full part code breakdown on page 64.

Accessories



R09-882

R3 & Centorio
Remote Control
Controls up to
100 downlights in
4 rooms/areas


Protium gimbal downlight



Protium is a recessed gimbal downlight with adjustable light distribution options. It features an integral LED light engine and remote driver for easy installation. The series comes in three sizes and two colour temperatures, with dimmable and emergency options available.



Dimensions in mm

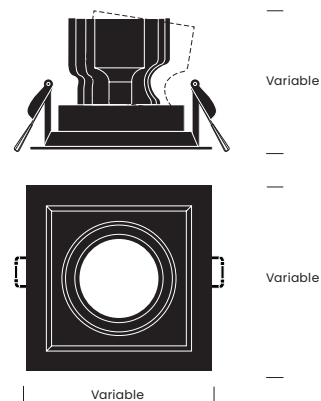

Efficacy	105 lm/W
CRI	>90 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Model	01	02	03
Type	Single head	Double head	Triple head
Wattage	22W	44W	66W
Size	140 x 140	270 x 140	375 x 140
Cut out	125 x 125	255 x 125	360 x 125

Kelvin	/3K	/4K
	3000K	4000K

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Accessories




/R09-HC65
Honeycomb diffuser

Code Example R093003/3K - Protium 66W in 3000K.
Full part code breakdown on page 62.

Protium Max extra large gimbal downlight



Protium Max is an extra large recessed gimbal downlight with adjustable light distribution options. It features an integral LED light engine and remote driver for easy installation. The series comes in three sizes, two outputs each, and two colour temperatures, with dimmable and emergency options available.

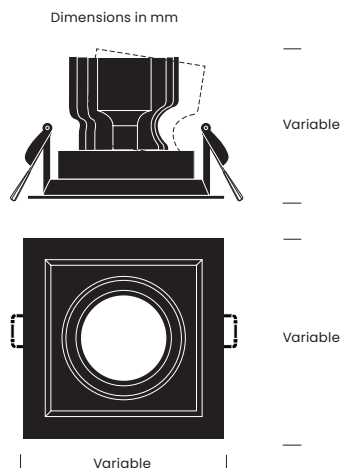

Efficacy	10 Lm/W
CRI	>90 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20



Model



11

Type	Single head
Size	175 x 175 x D133
Cut out	160 x 160



12

Type	Double head
Size	330 x 175 x D133
Cut out	315 x 160



14

Type	Triple head
Size	475 x 175 x D133
Cut out	460 x 160

Wattage

/25W	/40W	/50W	/80W	/75K	/120K
Single head	Single head	Double head	Double head	Triple head	Triple head

Kelvin

/3K	/4K
3000K	4000K

Options

/DH	/DD	/DL	/DSI
Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example

R093011/4K/25W - Protium Max Single 25W 4000K
Full part code breakdown on page 62.


Modus surface mounted



Modus is a circular surface mounted or pendant downlight with a white aluminium body and a glass TP(a) rated diffuser. It features high efficacy, IP65 protection, two wattage options and is available in 3000K or 4000K with optional DALI dimming.



Dimensions in mm

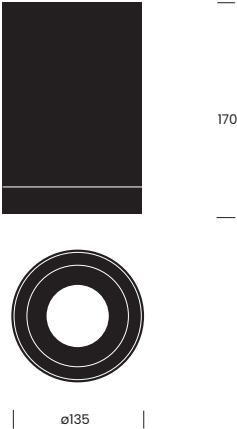

Efficacy	110 – Lm/W
CRI	>90 Ra
Beam Angle	60°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP65

Colour



/BK
Black body

/WT
White body

Kelvin

/27K
2700K

/3K
3000K

/4K
4000K

Wattages

/14W
14W

/28W
28W

Options

/DD
DALI dimming

/E
Emergency (non IP rated)

Code Example

R096920/WT/4K/28W – Modus Surface 28W White Finish 4000K
Full part code breakdown on page 63.

Accessories

R096-20/WT	White modus pendant kit
R096-20/BK	Black modus pendant kit






Saturn provides multi-directional wallwash/accent lighting with rotation and angle adjustments. Its adjustable head rotation of 340° and tiltable head of -18° to +45° make them perfect for internal sign lighting. The series comes in three sizes and two colour temperatures, with dimmable and emergency options.

5 YR
WARRANTY



Dimensions in mm

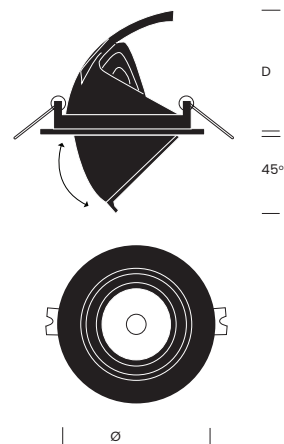

Efficacy	105 lm/W
CRI	>90 Ra
Beam Angle	40°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Model	01	02	03	04
	Wattage 12W	Wattage 12W	Wattage 24W	Wattage 24W
	Kelvin 3000K	Kelvin 5000K	Kelvin 3000K	Kelvin 5000K
	Diameter 105	Diameter 105	Diameter 158	Diameter 158
	Cut out 90	Cut out 90	Cut out 145	Cut out 145
	Depth 82	Depth 82	Depth 130	Depth 130
	05	06		
	Wattage 24W	Wattage 24W		
	Kelvin 3000K	Kelvin 5000K		
	Diameter 188	Diameter 188		
	Cut out 170	Cut out 170		
	Depth 159	Depth 159		

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example R091806/188 - Saturn 40W 5000K
Full part code breakdown on page 63.


R096950

Modus Max



Modus Max is a circular, high output IP65 downlight ideal for large areas. It comes in 70W, 100W or 150W versions with a white aluminium body and a glass TP(a) rated diffuser. Modus Max can be suspended via either a chain or a rod and is available in 3000K or 4000K with optional DALI dimming.

Dimensions in mm

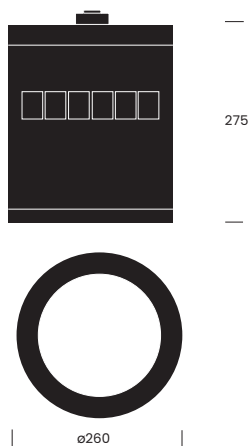


Efficacy	115 Lm/W
CRI	>85 Ra
Beam Angle	57°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP65

Kelvin	/3K	/4K	
	3000K	4000K	
Wattages	/70W	/100W	/150W
	70W	100W	150W
Options	/DD	/E	/DDPRO
	DALI dimming	Emergency (non IP rated)	DALI Addressable Emergency



RICOMAN LIGHTING CATALOGUE EDITION 8

Accessories



R096-50
Modus Max
suspension rod

Code Example R096950/3K/70W - Modus Max 70W 3000K
Full part code breakdown on page 63.

Pulsar Lite spotlight.

R09_







Pulsar Lite is a modern **angle and rotation adjustable** downlight with durable aluminium body. Installation is surface mounted or recessed, with white or black lens finish, four different beam angles and two colour temperatures. The same style luminaire is also available in **pendant, track mounted and integrated in our linear lighting** system for a consistent style throughout.



Efficacy	100 Lm/W
Wattage	12W
CRI	>90 Ra
Beam Angle	24° Standard
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Model




64

Pulsar Lite recessed mounted

Wattage	12W
Size	ø52 x H192
Cut Out	85

Dimensions in mm




65

Pulsar Lite surface mounted

Wattage	12W
Size	ø52 x H200

Dimensions in mm



Kelvin

01

3000K

02

4000K

Colour



Standard

White body



/BK

Black body

Reflector colour



Standard

White reflector



/BR

Black reflector

Beam angle

/15

15 degree
beam angle

Standard

24 degree
beam angle

/38

38 degree
beam angle


/55

55 degree
beam angle

Code Example

R096402 - Pulsar Lite Recessed 12W 4000K 24 degree beam angle.
Full part code breakdown on page 60.

Accessories



R09-HC40

Honeycomb
diffuser

Studio Power, architect office in Salford.







The collaboration between RICOMAN and Matic in this architect office lighting project showcases the expertise and commitment to delivering exceptional lighting solutions.

To ensure optimal lighting performance and versatility, the **Pulsar adjustable spotlight** was utilized in both track mounted and surface mounted versions. Its **adjustable beam angle**, ranging from narrow to wide, enables precise illumination in different areas of the commercial building. This adaptability makes the Pulsar spotlight an excellent choice for versatile applications throughout the architect office.






Track lighting

R1117__

E-Pro



E-Pro is the 3 circuit track version of the E-Pro downlights family. It features a cast aluminium white or black body and a choice of 2x2 or 3x3 square cellular optics created to deliver an extremely low glare rating. Available in 3000K and 4000K colour temperature.

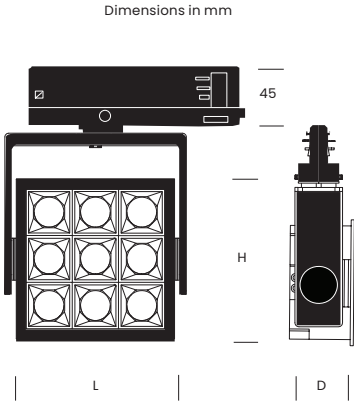

Efficacy	100-106 Lm/W
CRI	>90 Ra
Beam Angle	50°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP40

Model



22

Model	2x2 cells
Size	L111 x H93 x D47
Wattages	8W / 16W / 28W

33

Model	3x3 cells
Size	L149 x H171 x D47
Wattages	18W / 36W / 42W


Kelvin	/3K 3000K	/4K 4000K
--------	--------------	--------------

Colour	/BK Black model	/WT White model
--------	--------------------	--------------------

Options	/cc CASAMBI controls	/dd DALI dimming
---------	-------------------------	------------------------


Code Example R111733/18W/4K- E-Pro Track 3x3 cells in 18W, 4000K.
Full part code breakdown on page 56.

Zenith Switchable wattage spotlight



The Zenith 3 Circuit Track Light is a cutting-edge solution for versatile and adjustable LED spotlighting. With switchable wattages, Zenith was designed with precision and performance in mind, this track-mounted luminaire offers a range of features to meet your lighting needs.

Dimensions in mm

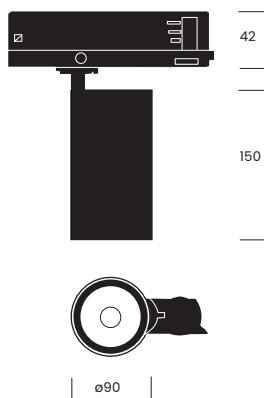

Wattage	12W-42W Switchable
Efficacy	100-106 Lm/W
CRI	>90 Ra
Beam Angle	24°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20



Kelvin	/27K	/3K	/4K
Kelvin	2700K	Kelvin	3000K
12W	1140 Lm	12W	1189 Lm
24W	2136 Lm	24W	2256 Lm
42W	3344 Lm	42W	3350 Lm
		Kelvin	4000K
		12W	1431 Lm
		24W	2707 Lm
		42W	4098 Lm

Colour



/BK
Black model




/WT
White model

Options

/CC CASAMBI controls
/DD DALI dimming

Accessories




/R09-HC75
Honeycomb
Diffuser


Code Example

R111401/3K - Zenith Switchable 12W-42W in 3000K.
Full part code breakdown on page 46.

Pulsar Lite Track



Pulsar Lite is the 3 circuit track version of the Pulsar downlights family. It features a cast aluminium white or black body, a choice of white or black reflector as standard and integral driver. Available in 3000K and 4000K colour temperature and customisable with 15°, 24°, 38° and 55° beam angles, Pulsar provides a complete display lighting solution.

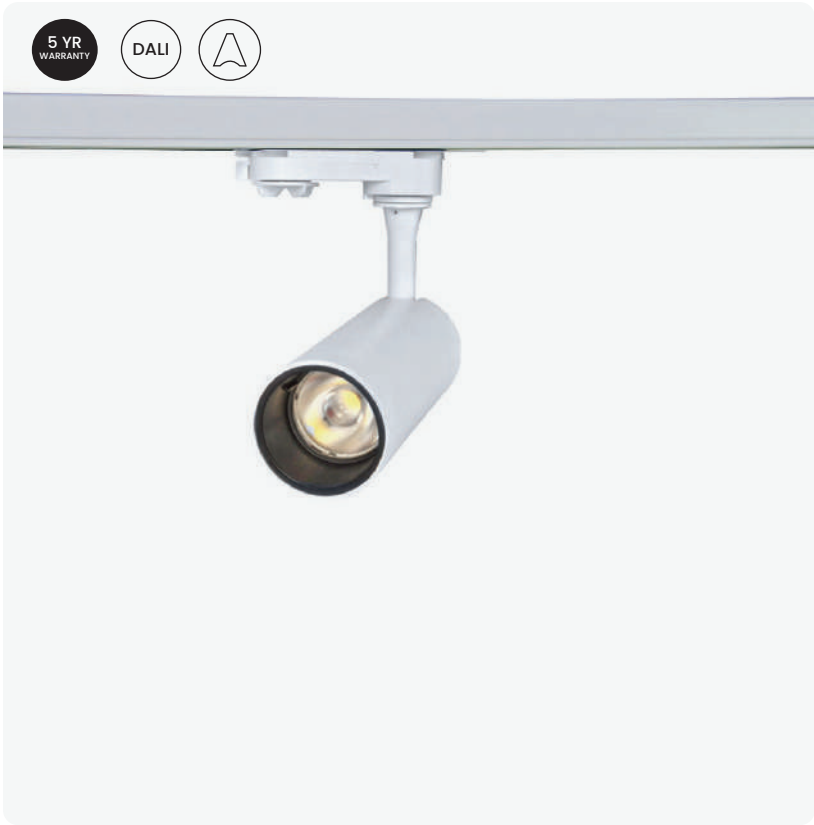

Wattage	12W
Efficacy	90 Lm/W
CRI	>90 Ra
Beam Angle	24° Standard
Operating Hours	50,000
SDCM	≤3
IP Rating	IP20


Kelvin	01 3000K	02 4000K	/27K 2700K
--------	--------------------	--------------------	----------------------

Beam angle	/15 15 degree beam angle	Standard 24 degree beam angle	/38 38 degree beam angle	/55 55 degree beam angle
------------	------------------------------------	---	------------------------------------	------------------------------------

Body Colour	/BK Black body	/WT White body
-------------	--------------------------	--------------------------


Reflector colour	 /BR Black reflector	 /WR White reflector
------------------	--	--

Code Example R096701/BK/WR/15 - Pulsar Lite Track 15° 3000k with black body and white reflector. Full part code breakdown on page 46.

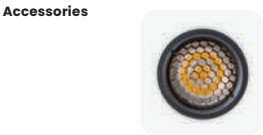


/R09-HC40
Honeycomb
diffuser

Pulsar Pendant Track




Pulsar pendant track is the 3 circuit track version of the Pulsar pendant. It features a cast aluminium white or black body. Available in 3000K and 4000K colour temperature and customisable with 15°, 24°, 38° and 55° beam angles, Pulsar pendant provides a complete display lighting solution.

Dimensions in mm



Wattage	10W
Efficacy	90lm/W
CRI	>90 Ra
Beam Angle	38° Standard
Operating Hours	50,000
SDCM	≤3
IP Rating	IP20

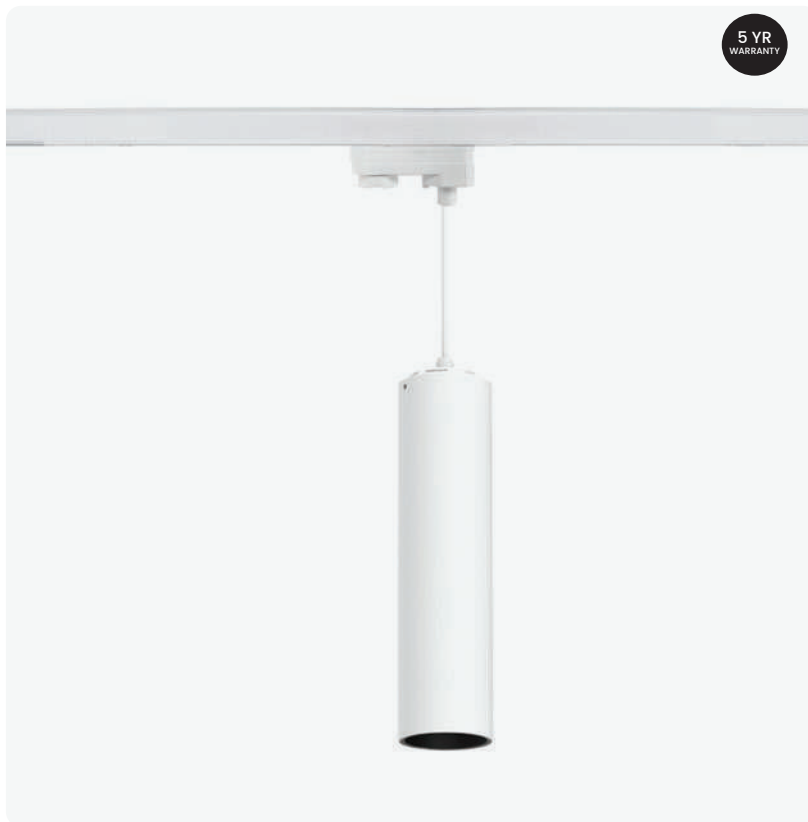

5 YR
WARRANTY


Kelvin	/27 2700K	/3K 3000K	/4K 4000K
--------	---------------------	---------------------	---------------------

Beam angle	/15 15 degree beam angle	/24 24 degree beam angle	standard 38 degree beam angle	/55 55 degree beam angle
------------	------------------------------------	------------------------------------	---	------------------------------------

Body Colour	/BK Black body	/WT White body
-------------	--------------------------	--------------------------

Options	/CC CASAMBI controls	/DD DALI dimming
---------	--------------------------------	----------------------------


Accessories




/R09-HC40
Honeycomb
diffuser

Code Example R111721/4K/WT/15 - Pulsar Pendant Track 10W, 4000K IN white with 15 beam angle. Full part code breakdown on page 46.

Egress Track exit sign



An exit sign for 3 circuit track mounting system featuring LED lamps known for its high efficiency, durability, and low energy consumption.

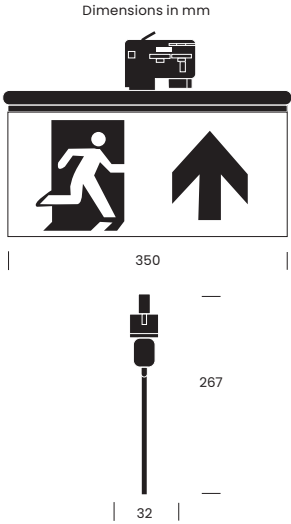

Wattage	2.7W
Lumens	170 Lm/W
Kelvin	6000K
Batery duration	3 hours
Mode of operation	Non-maintained
Battery	LiFePO4, 6.4V, 1.5AH

- Body Colour
- /BK

Black body
- /WT

White body

- Legnds
- /LR


Right legend
- /LL

Left legend
- /LD

Down legend
- /LU


Legend up

Draco Track emergency



An emergency LED for 3 circuit track mounting system featuring LED lamps known for their high efficiency, durability, and low energy consumption. It is designed to be used with Lithium Iron Phosphate (LiFePO4) batteries, ensuring reliable power backup. Additionally, the system includes a self-test and charge indicator for maintenance.

Dimensions in mm



Wattage	3W
Lumens	250 Lm/W
Kelvin	6000K
Batery duration	3 hours
Mode of operation	Non-maintained
Battery	LiFePO4, 6.4V, 1.5AH

Body Colour /BK /WT
Black body White body



Code Example R111221- Draco Track Emergency 3W.
Full part code breakdown on page 47.

3 Circuit Track System

RICOMAN track light range provides an efficient and aesthetically pleasing solution for display lighting. Fully adjustable with differing sizes and wattages allows total flexibility to display lighting projects. Colour rendition over 90 Ra is standard across the RICOMAN track light range, ensuring the object is reflected in the best possible way.



XTSF4 ----			
Surface or suspended track			
Sizes	10	20	
	1 Metre	2 Metres	
Colours	01	02	03
	Silver finish	Black finish	White finish



XTSF4 ----			
Recessed track			
Sizes	10	20	
	1 meter	2 meter	
Colours	01	02	03
	Silver finish	Black finish	White finish

Code Example XTSF41001- 3 Circuit recessed 1M track in silver
Full part code breakdown on page 47.

Mounting options



Suspension Mount

SPW12SK-1/5M	Silver 5m track clamp wire set
SPW12SK-2/5M	Black 5m track clamp wire set
SPW12SK-3/5M	White 5m track clamp wire set



Surface Mount

SKB121	Silver surface mount clamp
SKB122	Black surface mount clamp
SKB123	White surface mount clamp



Surface Mount to Suspended Ceiling

SKB11T1	Silver suspended ceiling clamp
sKB11T2	Black suspended ceiling clamp
sKB11T3	White suspended ceiling clamp



Suspension Mount

PRO-R105-001	Fixing bracket for recessed track
--------------	-----------------------------------

Accessories for Recessed Mount Track

XTSF101	Silver recessed feed cover plate
XTSF301	Silver recessed connector cover plate
XTSF102	Black recessed feed cover plate
XTSF302	Black recessed connector cover plate
XTSF103	White recessed feed cover plate
XTSF303	White recessed connector cover plate

Connectors



XTS113

Track live end



XTS143

Track connector with middle feed



XTS213

Track straight connector



XTS233

Track flexible corner



XTS243

Track adjustable corner



XTS343

Track L-connector



XTS353

Track L-connector mirror



XTS363

Track T-connector mirror



XTS373

Track T-connector



XTS383

Track X-connector



XTS393

Track T-connector



XTS403

Track T-connector mirror



XTS413

Track dead end cap



XTSV12

Track bending tool

Zodiac, 48V Track System






Welcome to the Zodiac range of low voltage tracks and track lights from RICOMAN lighting. Available in direct track, direct/indirect track or the stylish round track amount and type of lighting to suit your needs.

Zodiac, 48V Track System

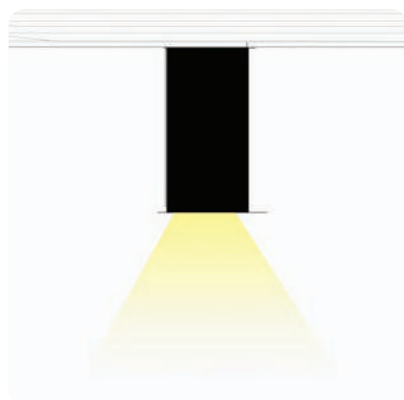

**Zodiac 48V Direct Track**


Sizes	-01	-02
	1 Metre	2 Metre

Accessories

-03
Zodiac 48V direct
horizontal 'I'
Connector shape



-04
Zodiac 48V direct
end caps (2 pcs)

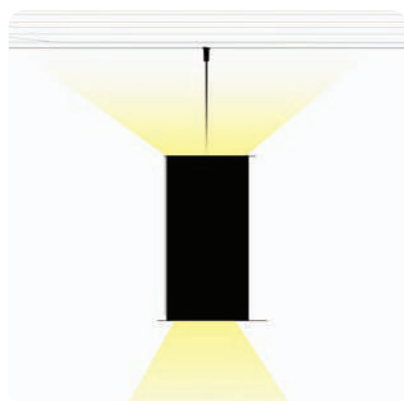**Zodiac 48V Direct / Indirect Track**



Sizes	-11	-12
	1 Metre	2 Metre

Accessories

-13
Zodiac 48V
direct/indirect
horizontal 'I'
connector
Shape



-14
Zodiac 48V
direct/indirect
end caps (2 pcs)

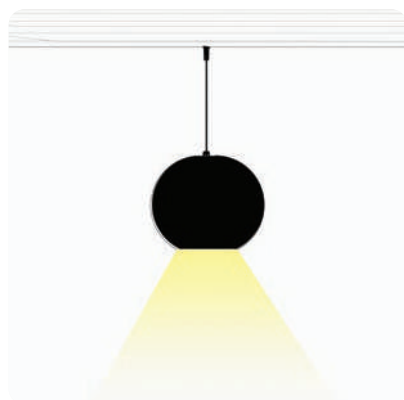**Zodiac 48V Round Track**

Sizes	-21	-22
	1 Metre	2 Metre



-23
Zodiac 48V round
horizontal 'I'
connector
Shape



-24
Zodiac 48V round
end caps (2 pcs)

**Options****/DD**

DALI dimming


Code Example

R112-21 - 1M Zodiac 48V Round Track
Full part code breakdown on page 48.


Accessories

R112-05	Zodiac 48V Recessed Installation Kit
R112-31	Zodiac 48V Track Mechanical Connector Plate
R112-32	Zodiac 48V Track Suspension Kit
R112-33	Zodiac 48V Track Black Cover Strip 1m
R112-34	Zodiac 48V Track Flexible Electrical Connector
R112-37	Zodiac 48V Track Straight Electrical Connector
R112-35/150W	Zodiac 48V Track Internal Driver 150W
R112-36	Zodiac 48V Track Power Connector for External Driver

Zodiac, 48V Track System

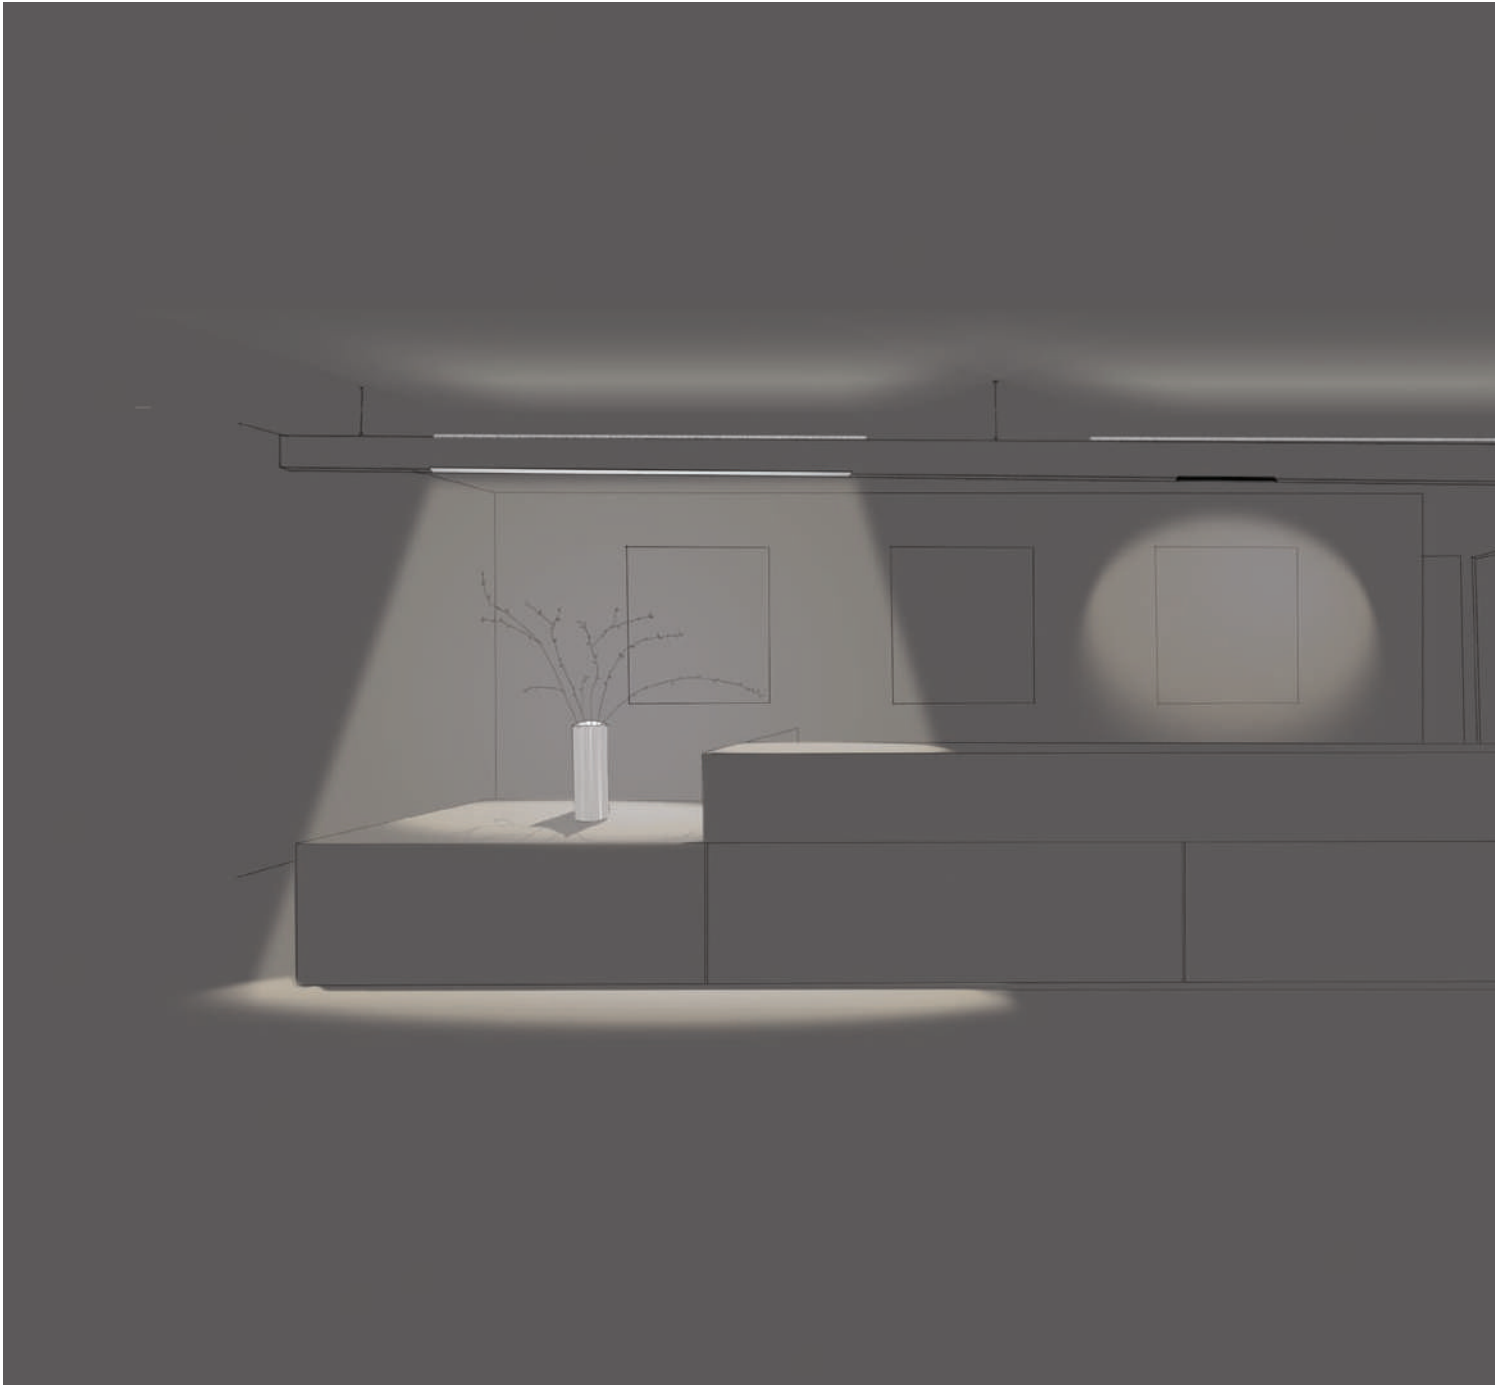

RICOMAN's Zodiac 48V Track System delivers a sleek, versatile lighting solution for modern homes, offices, and commercial spaces. With options for both **direct** & **indirect** lighting, it even includes a **Bluetooth speaker** for added functionality.

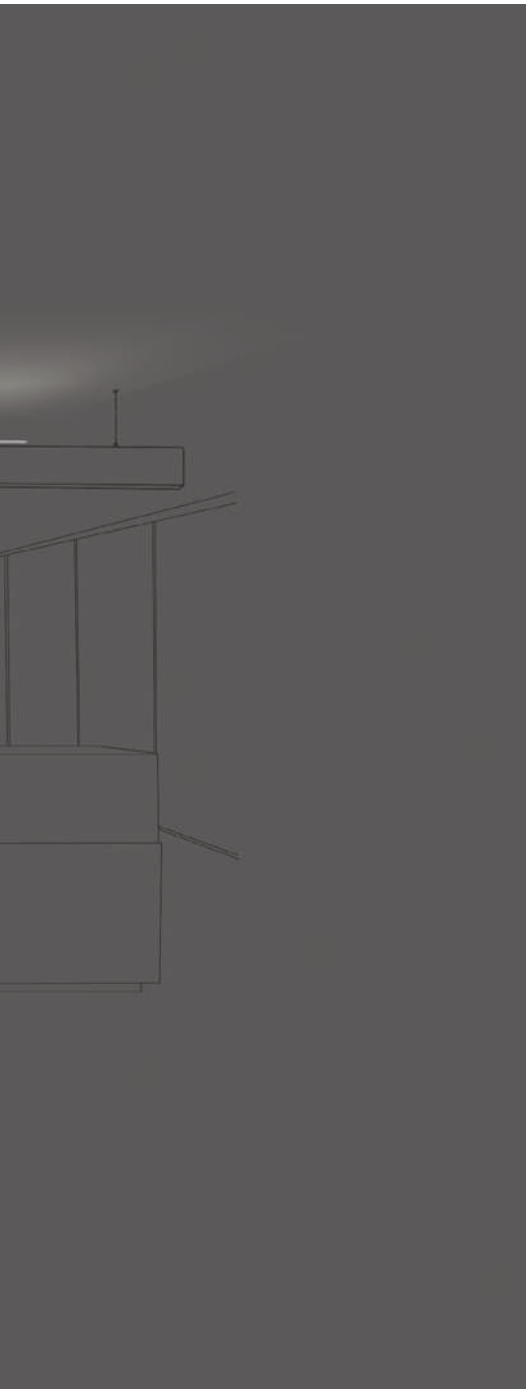

Zodiac Linear

Model	021	022
	Zodiac 48V track linear 7W - 300m	Zodiac 48V track linear 15W - 600mm
	028	023
	Zodiac 48V track linear up 5W - 300mm	Zodiac 48V Track linear Wallwash 12W
Kelvin	/3K	/4K
	3000K	4000K



Zodiac Recessed Aperture

Model	024	026
	Zodiac 48V track Recessed Aperture 6W	Zodiac 48V track Adjustable Recessed Aperture 6W
Kelvin	/3K	/4K
	3000K	4000K

Zodiac, 48V Track System



Zodiac Spotlights

Model

042

Zodiac 48V track
Zoomable spot
9W

044

Zodiac 48V track
up spot 5W

046

Zodiac 48V track
spot 18W

045

Zodiac 48V track
spot 10W

047

Zodiac 48V track
spot 24w

Kelvin

/3K

3000K

/4K

4000K

The Zodiac Spot range from RICOMAN lighting offers a versatile and efficient lighting solution that is ideal for highlighting specific areas or features in your space. This range features a variety of low voltage track lights that offer focused, directional lighting to create a dramatic effect in your space.

Sound & light, all in one track.



Zodiac Speaker		
Bluetooth Distance	10 Metres without obstacles	
Transmission Power	12DB	
Output Power	10W	
Model	011 Master Speaker	012 Slave Speaker

Zodiac, 48V Track System



This range features a variety of decorative lighting fixtures that offer both direct and indirect lighting to create a warm and welcoming atmosphere in your home or office.



Zodiac Beam

Model

004

Zodiac 48V track
beam 12w

Kelvin

/3K
3000K

Zodiac, 48V Track System

The decorative lights are available in a range of styles, finishes, and colour temperatures, so you can customise the lighting in your space to match your decor and style.



Zodiac Ring

Model	006 Zodiac 48V track ring 5W	005 Zodiac 48V track ring pendant 5W
Kelvin	/3K 3000K	/4K 4000K




Zodiac Globe

Model	002 Zodiac 48V track globe surface 5W	031 Zodiac 48V track globe pendant 5W
Kelvin	/3K 3000K	



Zodiac, 48V Track System

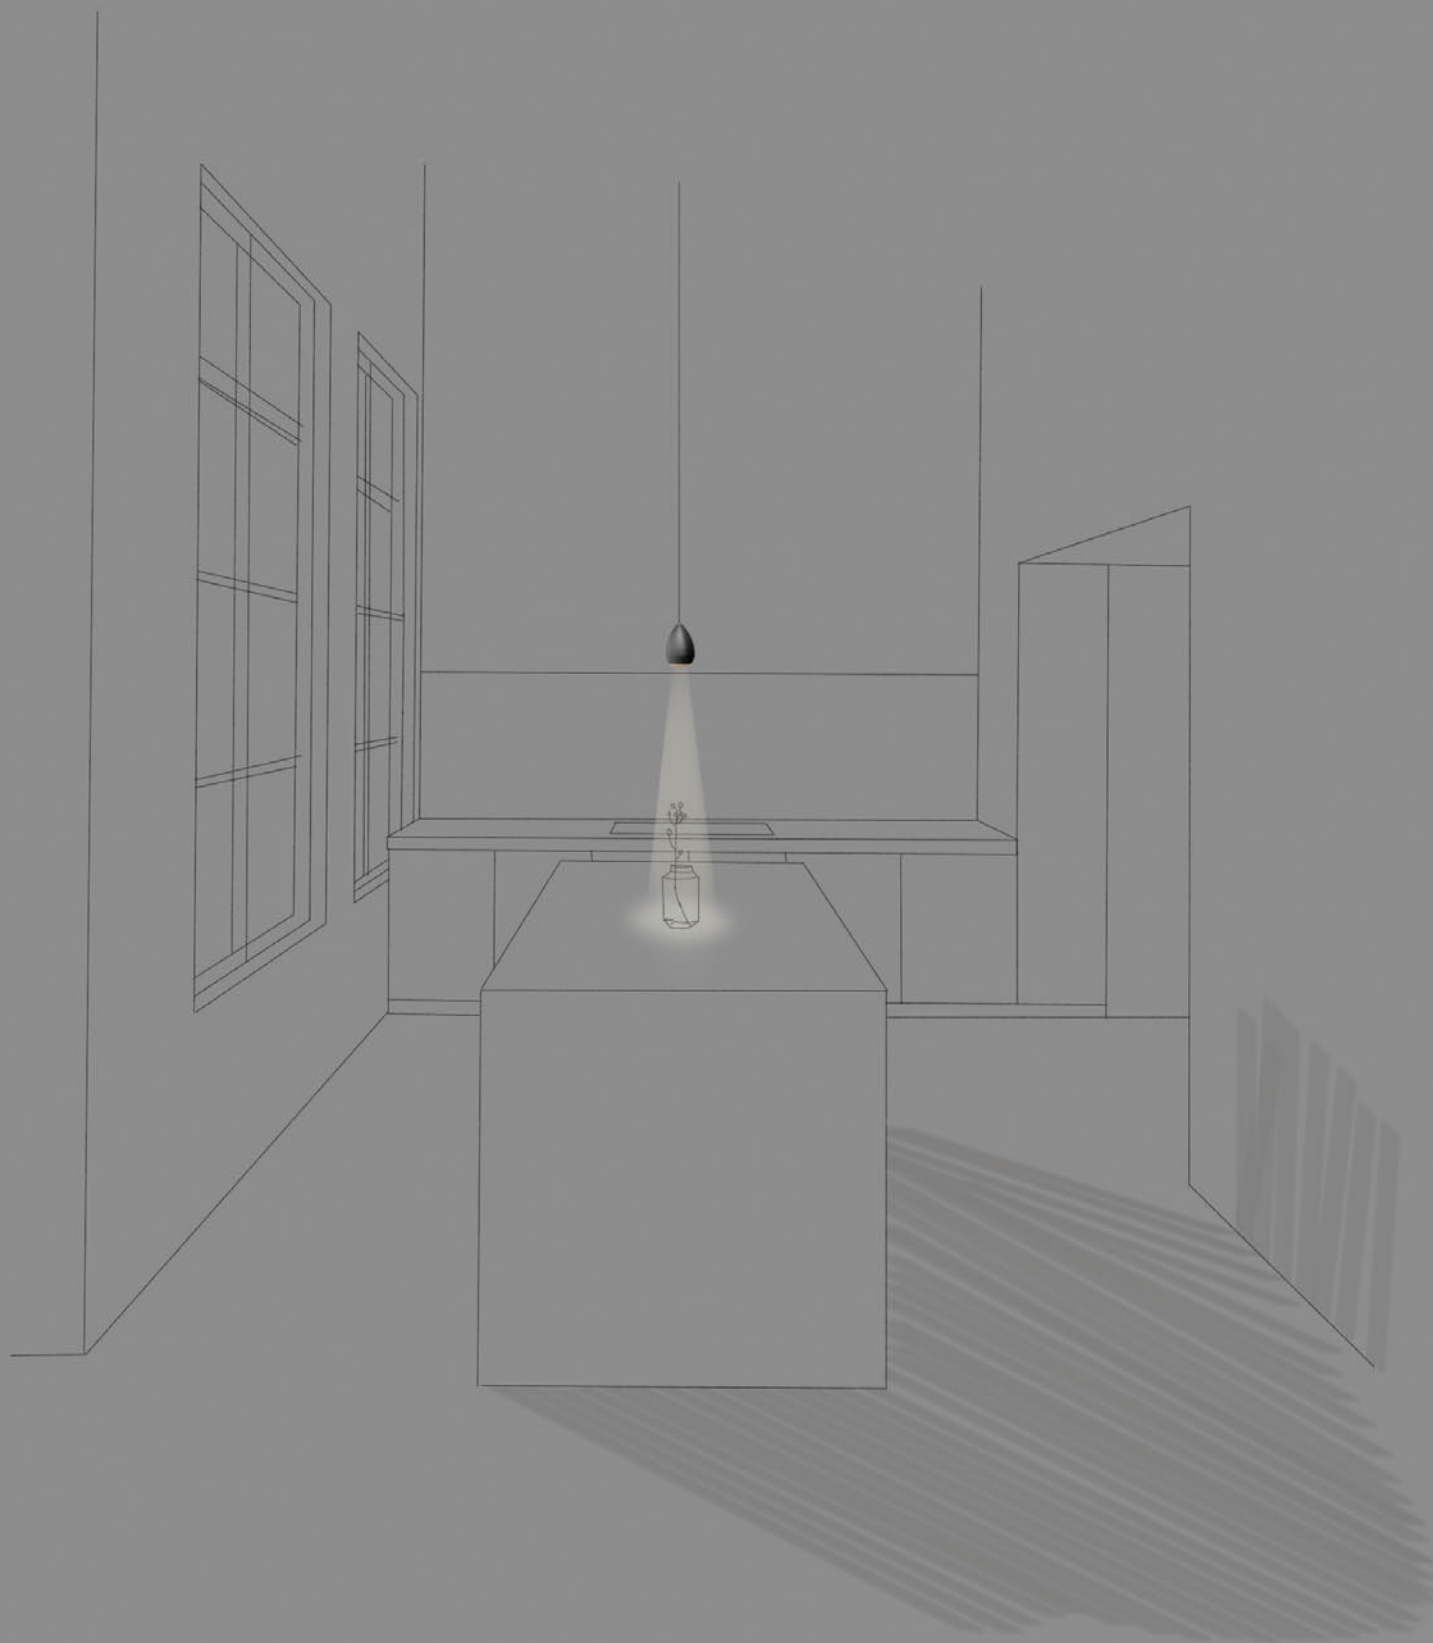

The Zodiac Pendant range from RICOMAN lighting offers a stylish and functional lighting solution that is perfect for creating a cosy and inviting atmosphere in your home or office.



Zodiac Drop Pendant

Model **032**
Zodiac 48v track
drop pendant 7w

Kelvin	/3K	/4K
	3000K	4000K



Zodiac Cylindrical Pendant

Model	034	033
	Zodiac 48V track brass cylindrical pendant 7W	Zodiac 48V track black cylindrical pendant 7W


Kelvin	/3K	/4K
	3000K	4000K

LNT Group, head office refurbishment.

RICOMAN recently had the privilege of working with our long-standing partners the **LNT Group** to refurbish their head office in Leeds. RICOMAN have a decade-long relationship with LNT Group being their main supplier of **lighting for their Care Home** builds throughout the UK.

We were happy to provide a lighting design, custom light manufacturing, and supplying bespoke lighting solutions for this office project. The use of **custom lighting** and **controls** were tailored to meet the specific needs of LNT Group's workspaces and their usages.



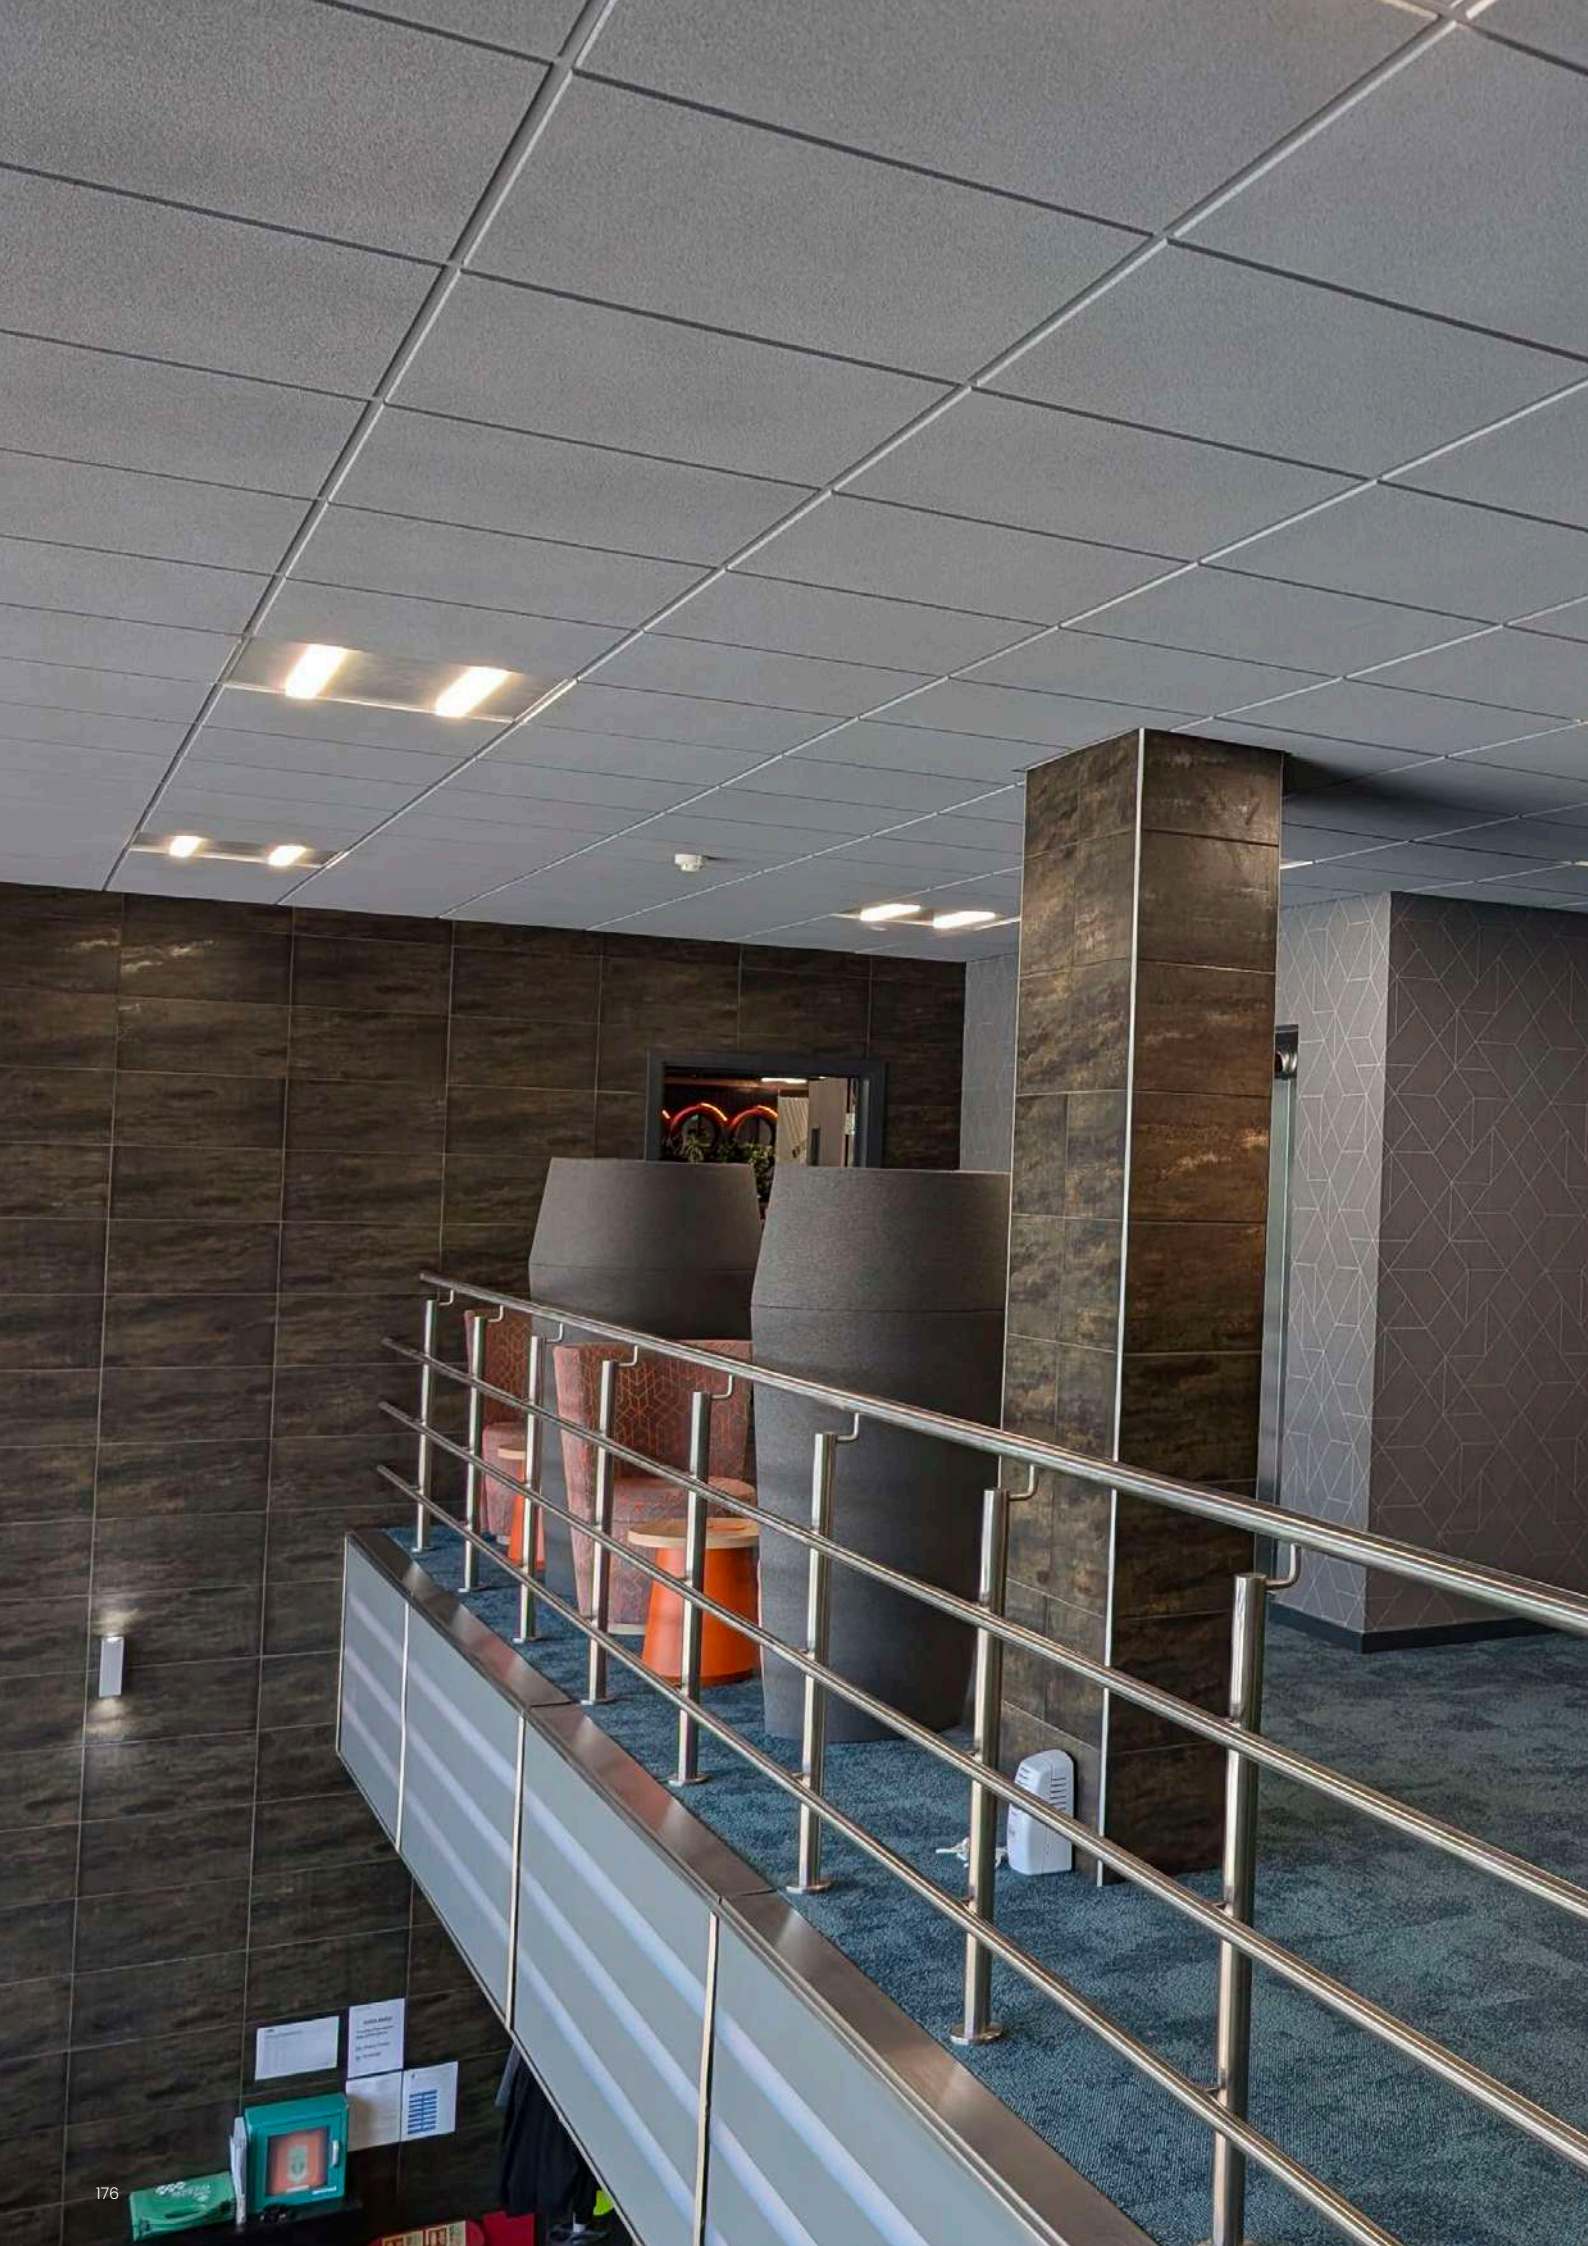



Recessed modular lighting


Core Plus backlit panel light



A backlit, flicker-free cost efficient LED panel light featuring slim line aluminium body and an opal diffuser for general, circulation and feature areas. Available with various mounting options to maximise versatility.



Dimensions in mm

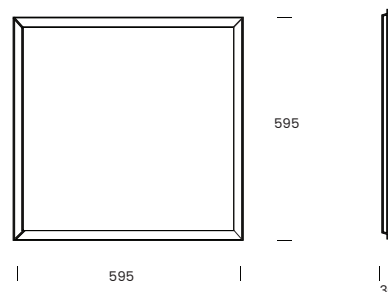

Efficacy	105lm/W
CRI	>80 Ra
Beam Angle	110°
Operating Hours	30,000
SDCM	≤6
L70 B50	50,000 hours
IP Rating	IP40

Wattage	/24W	Standard	/45W
	24W	32W	45W

Kelvin	/4K		/5K	
	24W	2532Lm	24W	2607Lm
	32W	3362Lm	32W	3362Lm
	45W	4750Lm	45W	4892Lm

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example R101281/24W - Core Plus Panel 600x600mm 24W 4000K
Full part code breakdown on page 40.

Accessories


RE36	Core 4 Point Suspension Kit
RE60	70mm deep surface mounting frame 6x6
RE10	Burgess Clips
RE13	Metal pan ceiling brackets
RE160	Recessed Frame 6x6

Core UGR backlit TP(a) panel



Core UGR is a backlit, flicker-free LED panel featuring an opal TP(a) rated diffuser for a number of applications. The panel series is available in 6x6, 12x3 and 12x6 sizes with various mounting options such as lay in exposed T ceilings, surface mounted, suspended and burgess ceilings.

Dimensions in mm

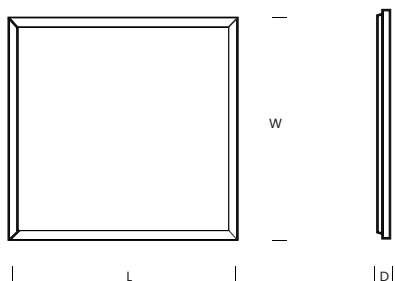

Efficacy	105Lm/W
CRI	>83 Ra
Beam Angle	130°
Operating Hours	50,000
SDCM	≤6
L70 B50	50,000 hours
IP Rating	IP40



Size	82	83	84
	L600xW600xD30	L1200xW300xD30	L1200xW600xD30

Wattage	/24W	/32W	/45W	/64W
	Available for the 6x6 panel	Available for the 6x6 and 12x3 panel	Available for the 6x6 panel	Available for the 12x6 panel

Kelvin	/4K
24W	2532Lm
32W	3358Lm
45W	4727Lm
64W	6717Lm

Options	/DH	/DD	/DL	/DSI
	Mains dimming	DALI dimming	0-10V dimming	DSI dimming

Code Example R101282/24W - Core UGR Panel 600x600mm 24W 4000K
Full part code breakdown on page 40.

Accessories

RE36	Core 4 Point Suspension Kit
RE10	Burgess Clips
RE13	Metal pan ceiling brackets
RE123	70mm deep surface mounting frame 12x3
RE126	70mm deep surface mounting frame 12x6

R10_----


Aquavance IP66 rated panel



An IP66 rated and flicker free LED panel light, ideal for medical applications and high humidity areas. Aquavance comes in different size and wattage options, offering exceptional lumen output along with maximum installation versatility making it suitable for a number of different areas and uses.



Dimensions in mm

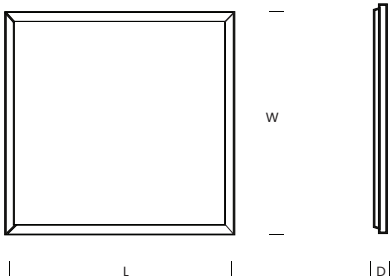

Efficacy	100Lm/W
CRI	>85 Ra
Beam Angle	110°
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP66

Size	11	12	13
	L600xW600xD12.5	L1200xW300xD12.5	L1200xW600xD12.5

Wattage	03	01	301
	36W	48W	72W

Code Example R10I203 - Aquavance Panel 1200x300mm 36W 5000K
Full part code breakdown on page 40.

Accessories

RE1	4-point suspension kit
RE2	Z-Clips - plasterboard ceilings
RE04	Driver Plate
RE6	Y Suspension Kit
RE7	Offset Bracket
RE8	Linear Clips
RE10	Burgess Clips
RE19	Surface Mounting Frame 1200x300mm
RE60	70mm deep surface mounting frame 6x6
RE123	70mm deep surface mounting frame 12x3
RE126	70mm deep surface mounting frame 12x6
RE160	Recessed Frame 6x6



Alderley Edge Medical Centre in Alderley Edge.
Aquavance IP66 panel light.


Pure 5x5 panel



LED panel light ideal for general commercial applications. Pure Panel range comes in 5x5 with dimming and emergency options available. The innovative back channel allows various mounting options to maximise versatility.



Dimensions in mm

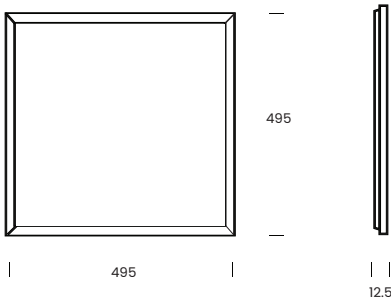

Wattage	30W
Efficacy	100lm/W
Kelvin	4000K
CRI	>85 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP44

Options

- /DH**
Mains
dimming
- /DD**
DALI
dimming
- /DL**
0-10V
dimming
- /DSI**
DSI
dimming

Code Example R101191/4K - Pure Panel 500x500mm 30W 4000K
Full part code breakdown on page 40.

Accessories


RE1	4-point suspension kit
RE2	Z-Clips - plasterboard ceilings
RE04	Driver Plate
RE6	Y Suspension Kit
RE7	Offset Bracket
RE8	Linear Clips
RE10	Burgess Clips

Libra switchable wattage



Libra is a cutting-edge low glare panel light that seamlessly blends functionality with a sleek and stylish design. This innovative lighting solution is equipped with the unique ability to switch between wattages and colour temperatures, offering users unparalleled flexibility and control over their lighting environment.

Dimensions in mm

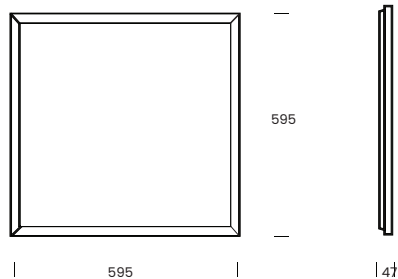

Wattage	24W 36W Switchable Wattage
Efficacy	112 Lm/W 107 Lm/W
Kelvin	3000K 4000K 5700K
CRI	>90 Ra
Beam Angle	110°
Operating Hours	50,000
IP Rating	IP20



Options	/DH Mains dimming	/DD DALI dimming	/DL 0-10V dimming	/DSI DSI dimming	/PRI PRI	/CC Casambi
---------	--------------------------------	-------------------------------	--------------------------------	-------------------------------	--------------------	-----------------------

Code Example R172201- Libra Switchable Wattage (24W | 36W) and Colour Temperature (3000K | 4000K | 5700K)
Full part code breakdown on page 43.

Accessories	
RE36	Core 4 Point Suspension Kit
RE60	70mm deep surface mounting frame 6x6
RE13	Metal pan ceiling brackets
RE160	Recessed Frame 6x6


O² customizable modular luminaire.



R88-----

o² customasible modular luminaire

Construction Material	Aluminium
IP Rating	IP20
IK Rating	IK08
Operating Hours	50,000
Macadam Ellipse	±3 sdcm
L70 B50	100,000 hours

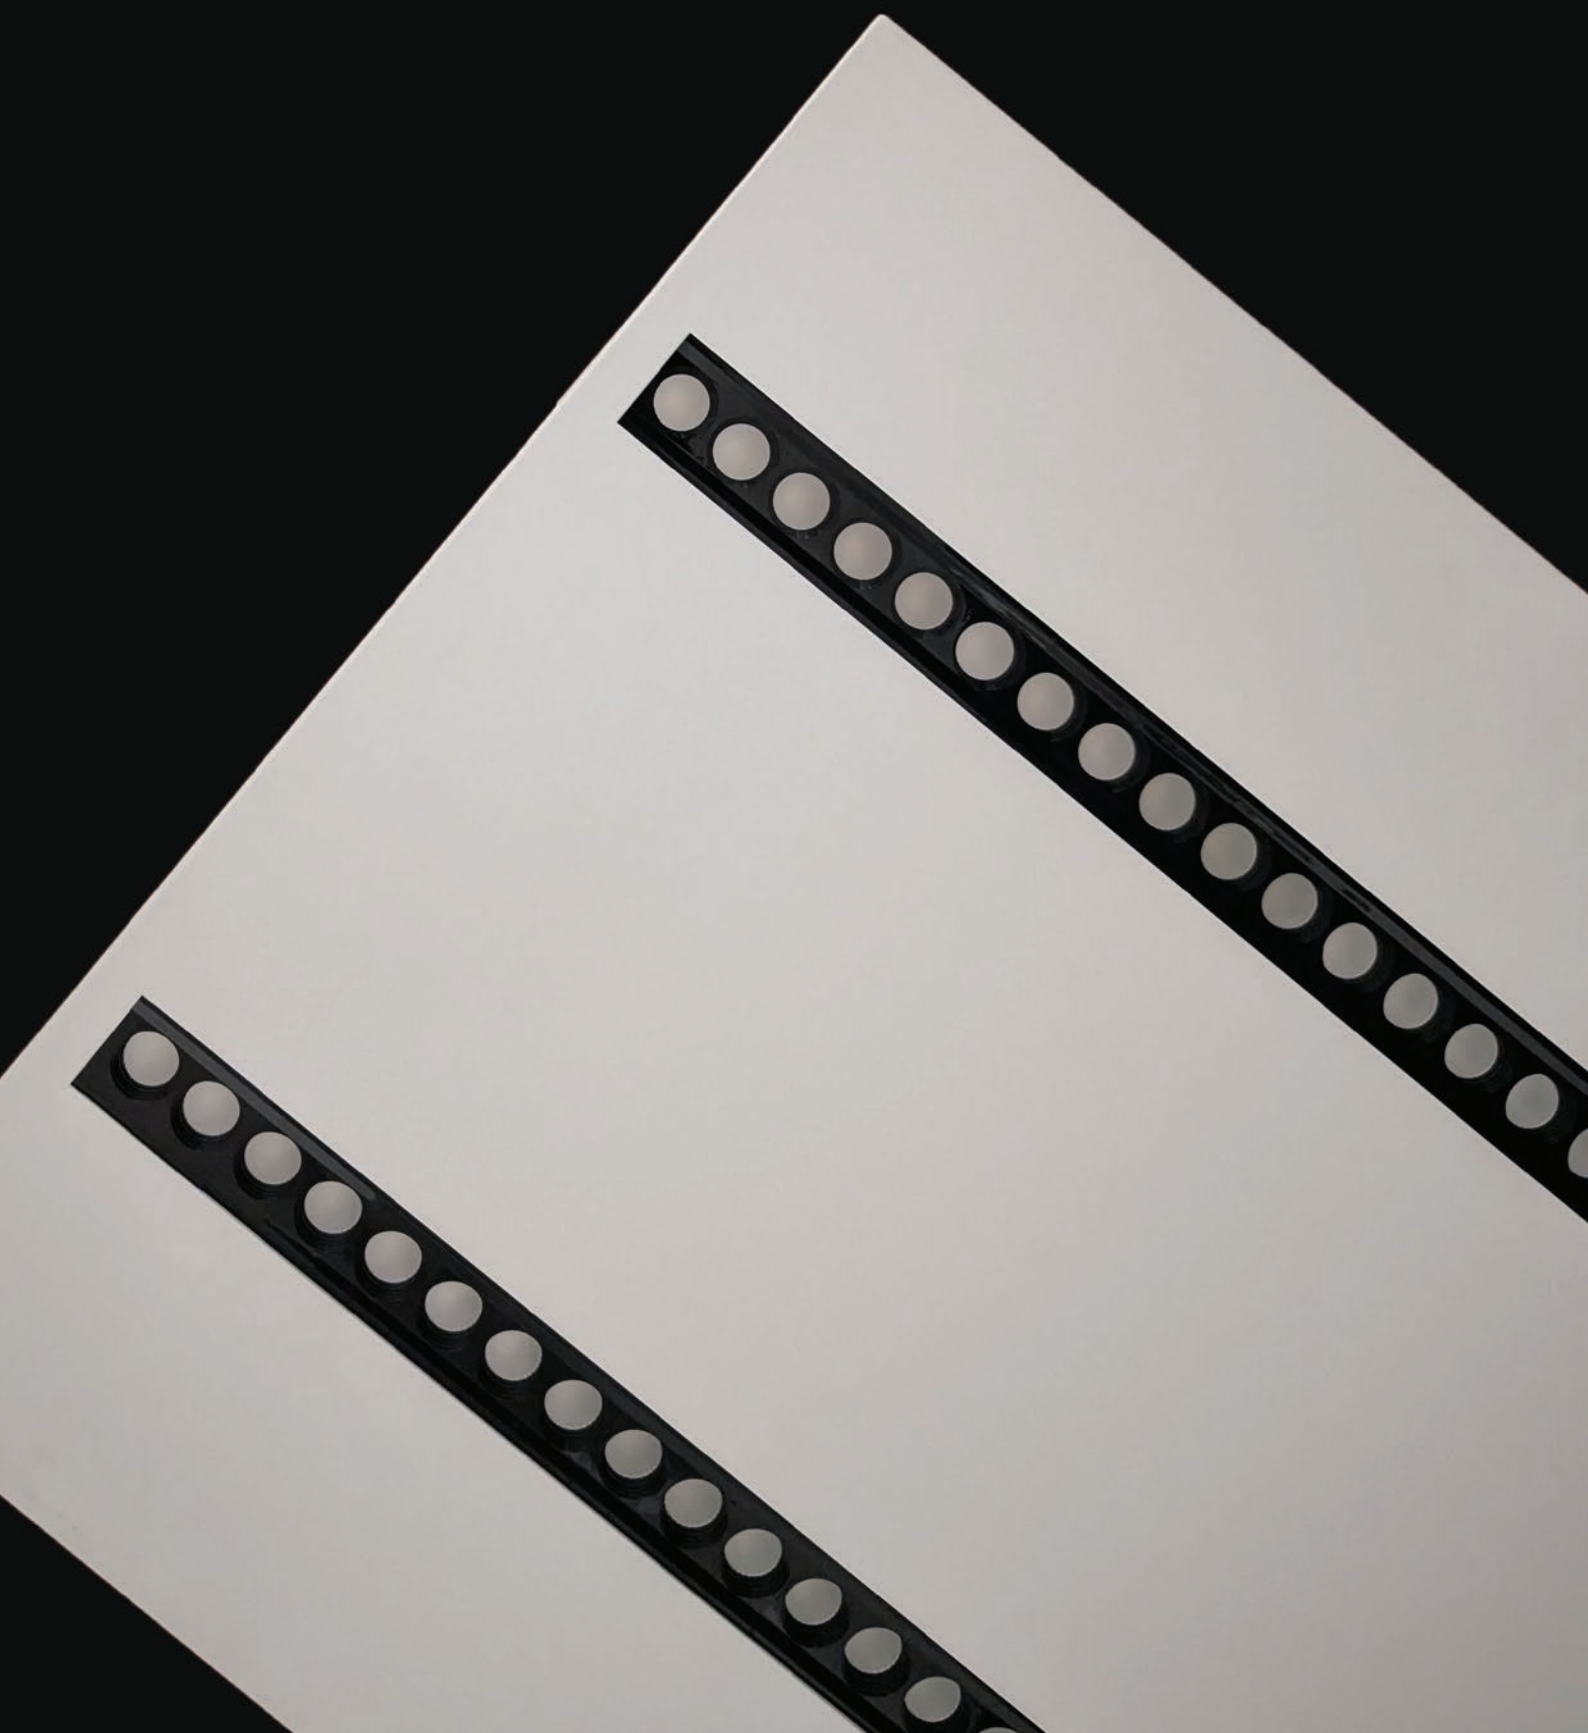



Model



0X0X

Double module
X: optic number



0X0X0X

Triple module
X: optic number

Optics



01

Opal optic

Efficacy	120Lm/W
Beam Angle	100°



02

LG7 optic

Efficacy	125Lm/W
Beam Angle	90°



03

Recessed aperture optic

Efficacy	125Lm/W
Beam Angle	50°



04

Wallwasher optic

Efficacy	116Lm/W
Beam Angle	60°



05

Dark Louvre Optic

Efficacy	75Lm/W
Beam Angle	70°



06

Mirror louvre optics

Efficacy	96Lm/W
Beam Angle	70°



07

White louvre optic

Efficacy	104Lm/W
Beam Angle	70°



Accessories

RE1	4-point suspension kit
RE04	Driver Plate
RE6	Y Suspension Kit
RE10	Burgess Clips
RE13	4-Piece metal pan ceiling brackets
RE60	70mm deep surface mounting frame 6x6
RE160	Recessed Frame 6x6

We have introduced a luminaire that drastically reduces plastic use by 94% compared to standard LED panels. This innovative design allows for easy replacement of light engines and drivers, which can be returned to us for recycling, promoting sustainability. The luminaire also offers versatile installation options, various lighting designs, and impressive performance, making it an attractive choice for architects and designers while aligning with environmental goals.

Output

/24W	/32W	/36W	/48W
Double module	Double module	Triple module	Triple module

Kelvin

/3K	/4K	/5K	/TW
3000K	4000K	5000K	Tunable white

Options

/DH	/DD	/DL	/DSI	/PIR	/CC
Mains dimming	DALI dimming	0-10V dimming	DSI dimming	PIR	Casambi

Code Example R880101/24W - O² Opal 24W
Full part code breakdown on page 41.


CTC changing panel light



A tunable white 2500–6500K LED panel light with innovative back channel allowing for a number of installations. CTC is IP44 rated, dimmable as standard and offers control via a wall mounted or a remote control. The innovative back channel allows various mounting options to maximise versatility.



Dimensions in mm

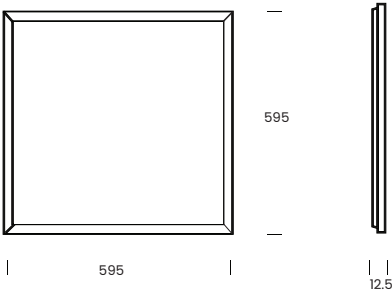

Wattage	36W
Efficacy	84lm/W
Kelvin	2500K – 6500K
CRI	>80 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP44

- Options
- /DMX

DMX controls
- /cc

Casambi control

Accessories


RE1	4-point suspension kit
RE2	Z-Clips - plasterboard ceilings
RE04	Driver Plate
RE6	Y Suspension Kit
RE7	Offset Bracket
RE8	Linear Clips
RE10	Burgess Clips
RE60	70mm deep surface mounting frame 6x6
RE160	Recessed Frame 6x6

Code Example RR101107 - CTC Panel 600x600mm 36W 2500K-6500K Dimmable. Full part code breakdown on page 42.




A colour changing dimmable 600x600 LED panel light ideal for creating a unique atmosphere. RGBW offers wall, remote control and DMX based control options. The innovative back channel allows various mounting options to maximise versatility.

Dimensions in mm

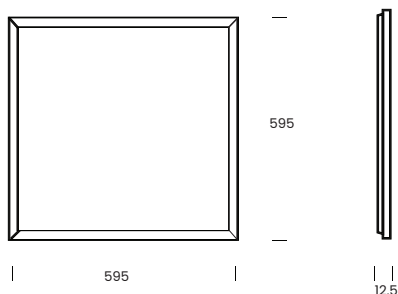

Wattage	36W
Efficacy	49Lm/W
Kelvin	RGBW
CRI	>80 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP44

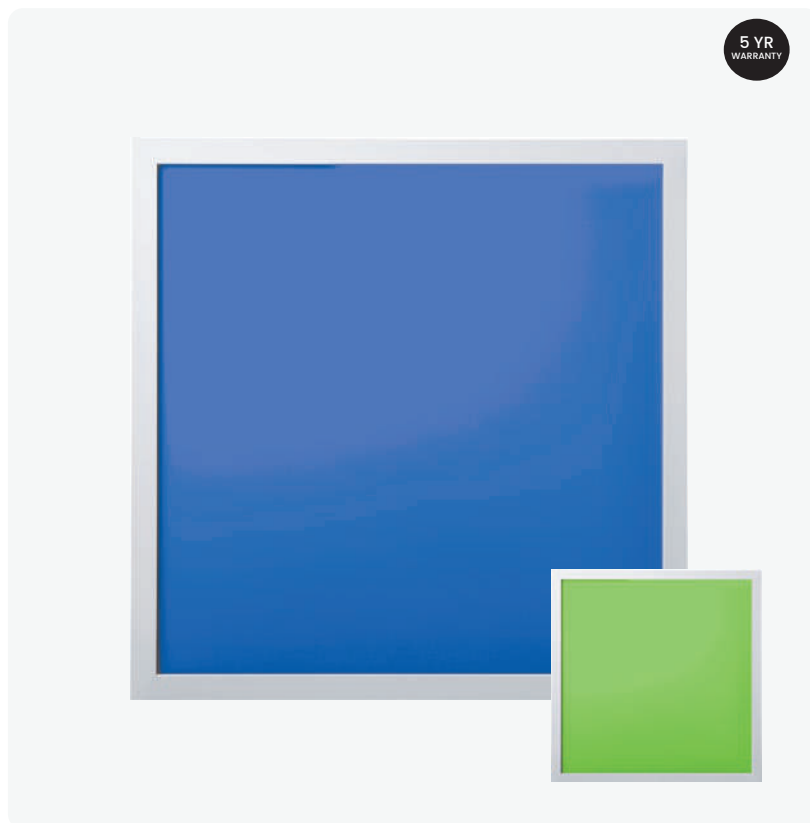

Options

/DMX

DMX controls

/CC

Casambi control

Code Example

R101106/RGBW - RGBW Panel 600x600mm 36W Dimmable.
Full part code breakdown on page 43.

Accessories

RE1	4-point suspension kit
RE2	Z-Clips - plasterboard ceilings
RE04	Driver Plate
RE6	Y Suspension Kit
RE7	Offset Bracket
RE8	Linear Clips
RE10	Burgess Clips
RE60	70mm deep surface mounting frame 6x6
RE160	Recessed Frame 6x6


Sky Panels



A single or set of 4, 6, 9 backlit, flicker-free cost efficient LED panel lights featuring slim line aluminium body and a printed sky effect. Ideal for creating a natural feature lighting effect and a unique atmosphere in any workplace. Panel lights with custom graphics are also available.



Dimensions in mm

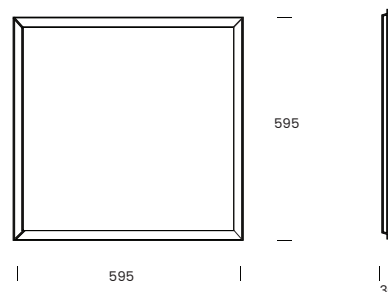

Efficacy	105lm/W
Kelvin	2500K - 6500K
CRI	>80 Ra
Beam Angle	110°
Operating Hours	50,000
SDCM	≤6
L70 B50	50,000 hours
IP Rating	IP44

Sets	1 1 panel	4 Set of 4 panels	6 Set of 6 panels	9 Set of 9 panels
-------------	---------------------	-----------------------------	-----------------------------	-----------------------------

Size	Standard L600xH600xD30	/123 L1200xH300xD30	/126 L1200xH600xD30
-------------	----------------------------------	-------------------------------	-------------------------------

Options	/DH Mains dimming	/DD DALI dimming	/DL 0-10V dimming	/DSI DSI dimming
----------------	-----------------------------	----------------------------	-----------------------------	----------------------------

Designs					
	Sky	Trees	Balloons	Sea	Custom

Code Example	R101294 - Set of 4 600x600 Sky Panels. Full part code breakdown on page 43.
---------------------	--

Accessories

RE36	Core 4 Point Suspension Kit
RE60	70mm deep surface mounting frame 6x6
RE10	Burgess Clips
RE13	Metal pan ceiling brackets
RE160	Recessed Frame 6x6



Accessories

At RICOMAN, we offer a comprehensive range of panel accessories designed to provide flexibility and ease of installation for various ceiling types. Our accessories include solutions for suspended, surface, and recessed frames, ensuring that our panels can be seamlessly integrated into any environment.

For metal pan and Burgess ceiling installations, our RE13 and RE10 accessories are specifically designed to solve the challenge of securely and efficiently luminaire lighting into these ceiling types. They offer a reliable solution, ensuring quick and hassle-free installation without compromising the structural integrity of the ceiling.

Accessories

RE01	4-point suspension kit (Pack of 4)
RE02	Z-Clips (Pack of 4) - plasterboard ceilings
RE04	Driver Plate
RE06	Y Suspension Kit
RE07	Offset Bracket (Pack of 4)
RE08	Linear Clips (Pack of 4)
RE10	Burgess Clips (Pack of 2) - purchased with a RICOMAN panel
RE13	4-Piece metal pan ceiling brackets
RE19	Surface Mounting Frame 1200x300mm
RE36	4 - point suspension kit for Core Panels
RE60	70mm Deep Surface Mounting Frame 600x600mm
RE123	70mm Deep Surface Mounting Frame 1200x300mm
RE126	70mm Deep Surface Mounting Frame 1200x600mm
RE160	Recessed Frame 600x600mm
RE130120	Recessed Frame 1200x300mm
RE160120	Recessed Frame 1200x600mm




RE13
Piece metal pan ceiling brackets



RE10
Burgess Clips



RE130120
Recessed Frame 600x600mm

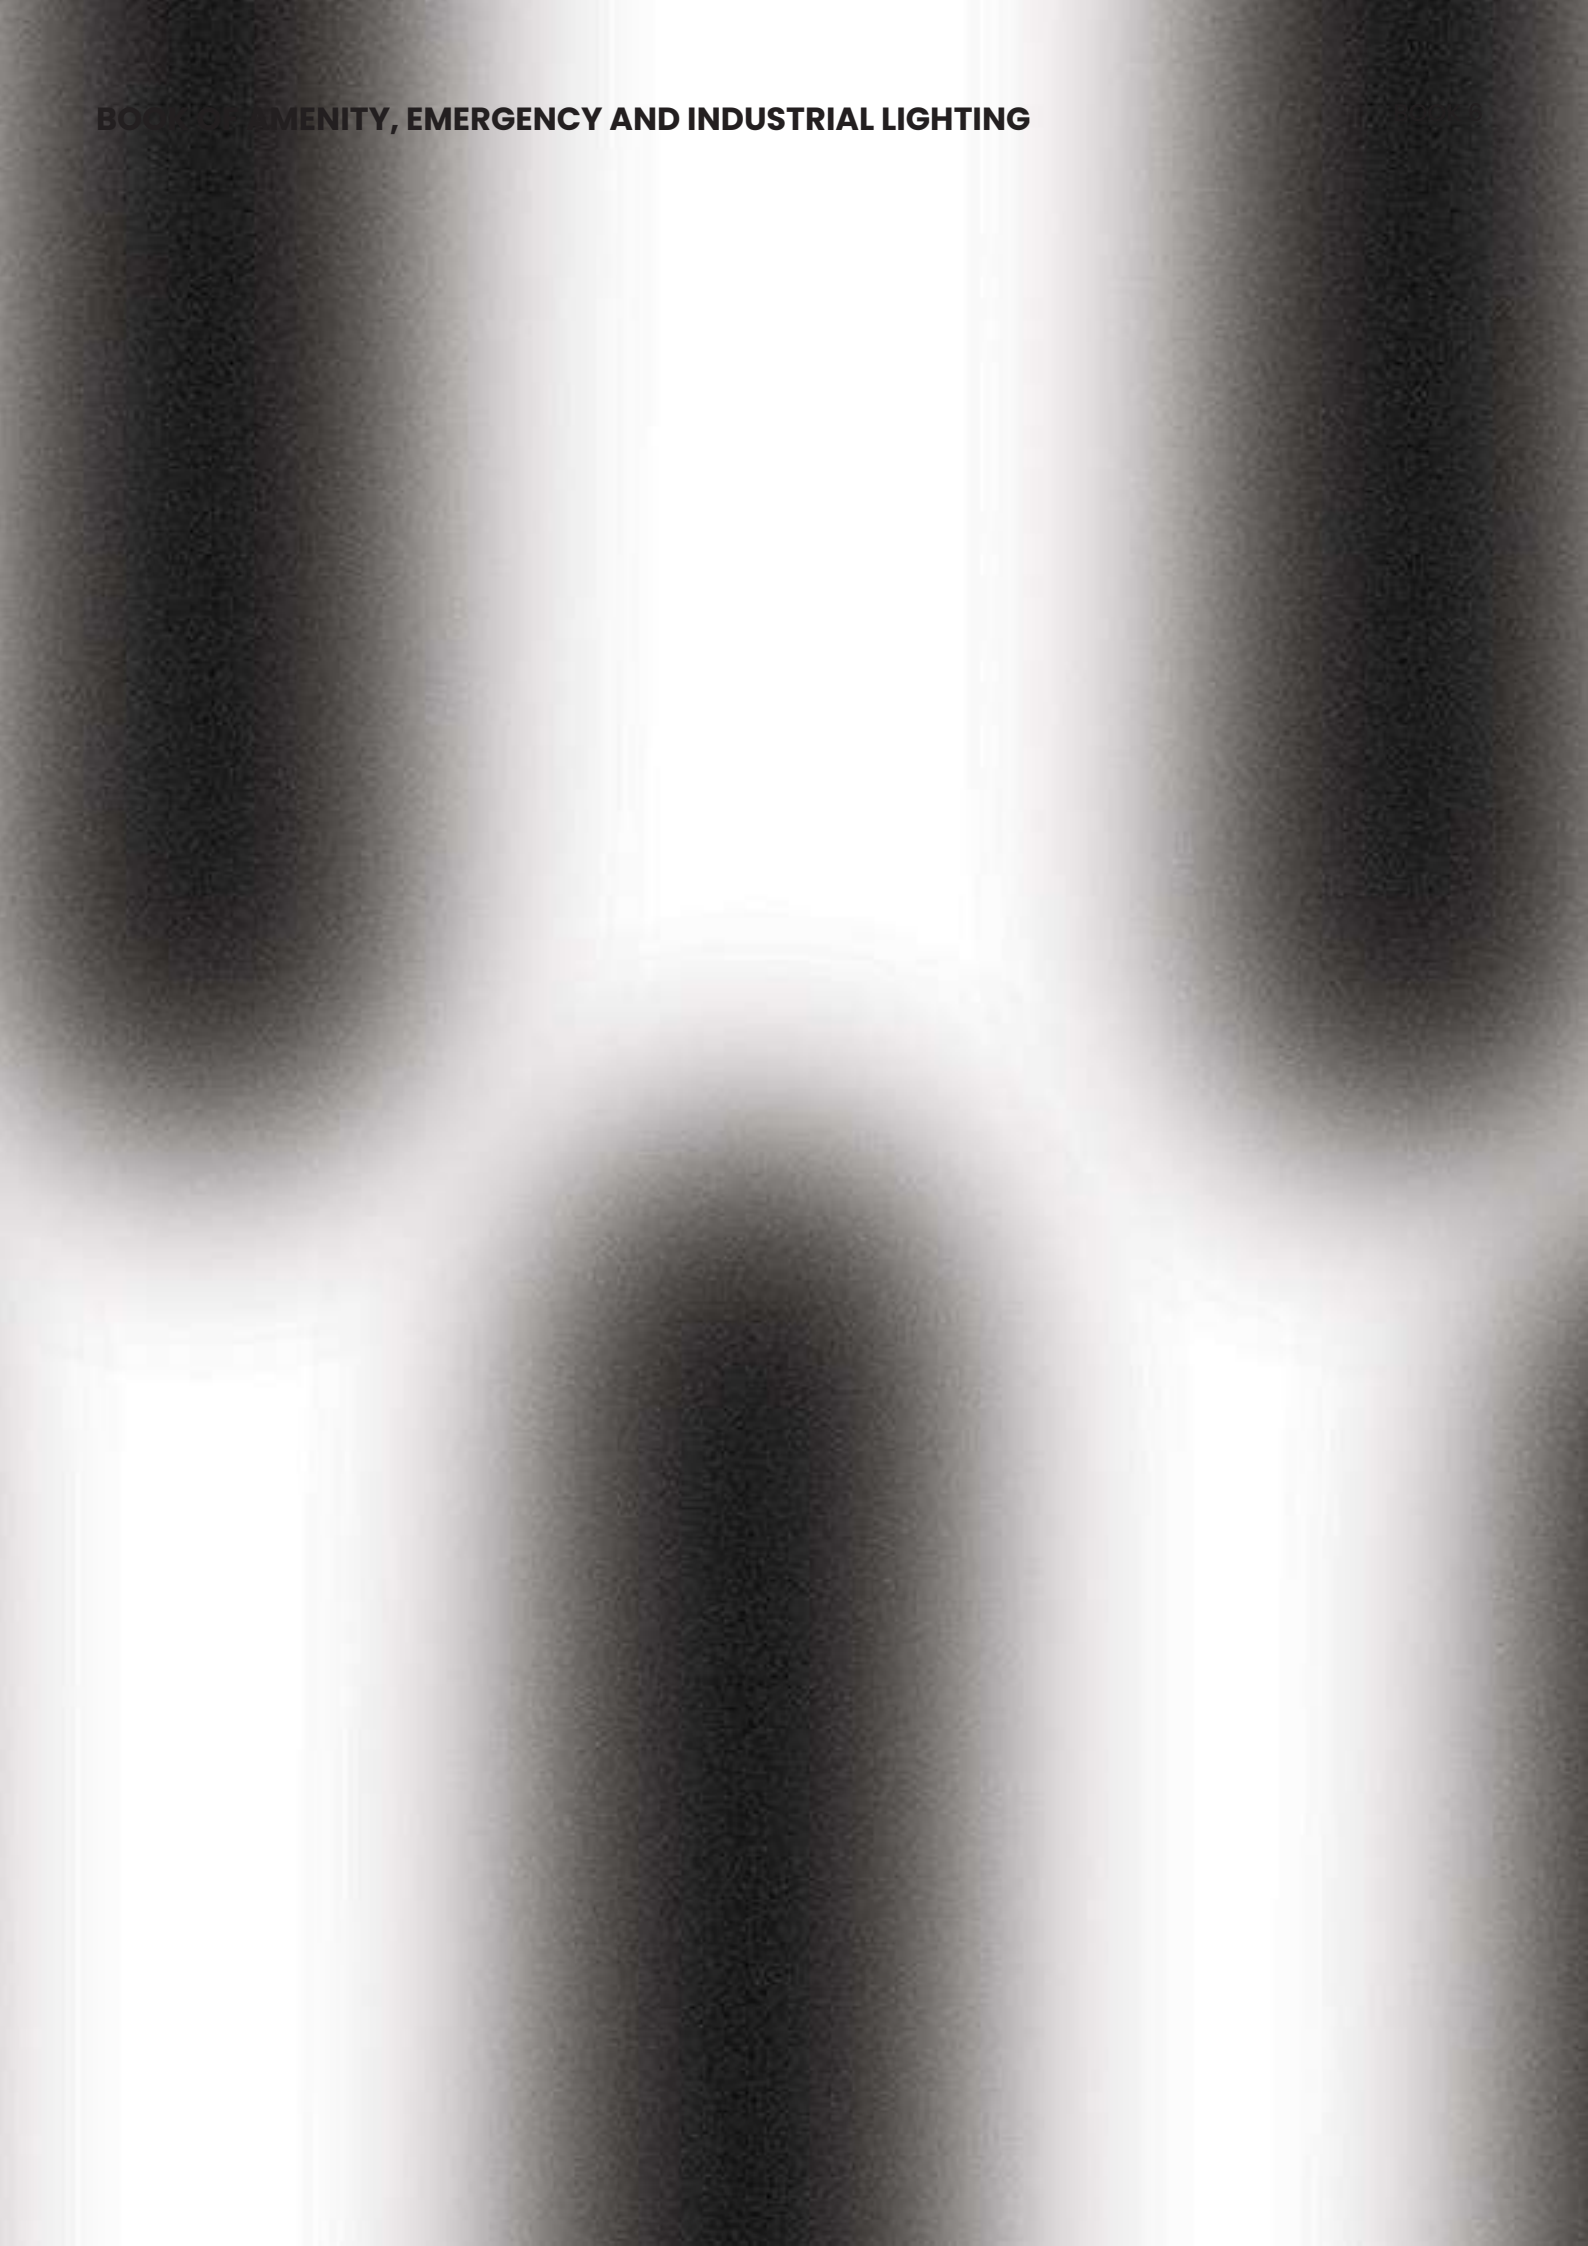

Local Blackfriars, luxury apartments in Manchester.







The outcome of the Local Blackfriars project is excellent, with **Beacon** complimenting an excellent design aesthetic of the building. Optimum light levels goes together and adding style with the luminaires' architectural appearance.

Outdoor lighting

Beacon



Beacon is a robust exterior IP65 die-cast aluminium LED bollard with a classic look suitable for most applications. Easy install, Beacon is ideal along driveways or footpaths. It comes in 3000K or 4000K with dome, flat or louvre effect.



Dimensions in mm



Wattage	25W
Efficacy	~80lm/W
CRI	>80 Ra
Beam Angle	90°
Operating Hours	50,000
SDCM	≤4
L70 B50	100,000 hours
IP Rating	IP65

Design



- 14**
Dome
- 24**
Flat Top
- 34**
Louvre

- Kelvin**
/3K
3000K
- /4K**
4000K

Accessories



Code Example R301014/4K - Beacon with dome in 4000K
Full part code breakdown on page 280.

R3010-01
Root Mount Kit





Local Blackfriars, luxury apartments in Manchester
Client: DOMIS

Porcini



The Porcini bollard light is a stylish and architectural light that is perfect for outdoor applications. The mushroom shaped design is both unique and eye-catching, and the switchable colour temperature allows you to choose the perfect light for your setting. The 25W LED delivers 1100 lumens of light, available in either a 500mm or 1000mm height. The flange mount makes it easy to install, with an optional root mount kit available.

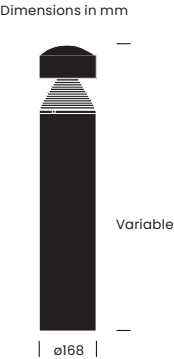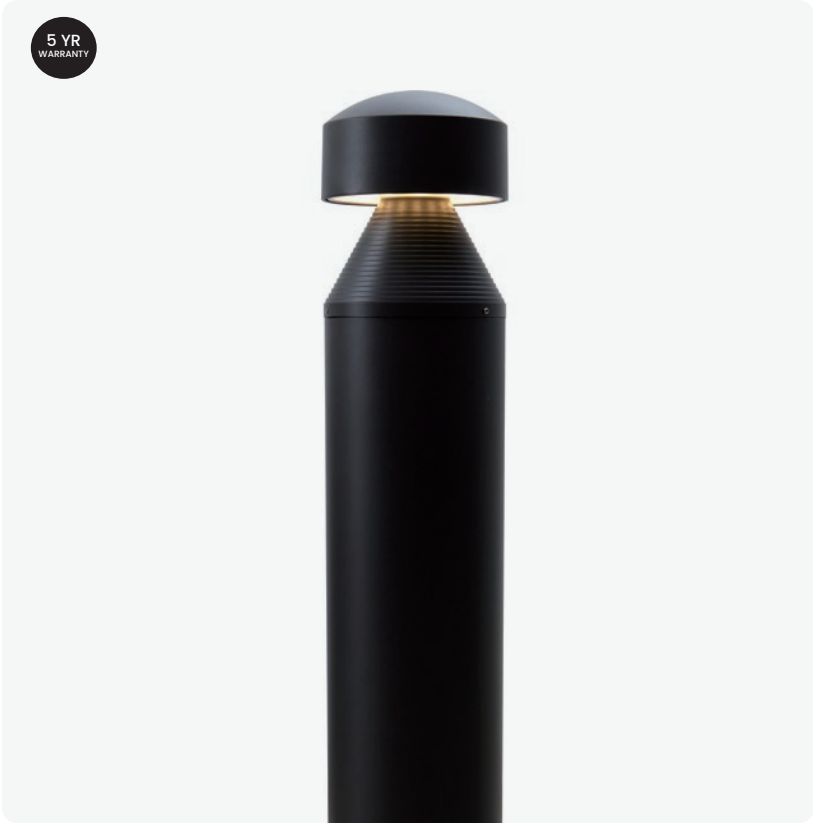

Wattage	25W
Efficacy	44lm/W
Finish	Black
Kelvin	3000K/4000K (Switchable)
CRI	>80 Ra
Beam Angle	60°
Operating Hours	50,000
IP Rating	IP65

- Size
- /P500

500mm height
- /P1000

1000mm height

Accessories




Code Example R301050/P500 - Porcini 500mm
Full part code breakdown on page 280.

R3010-01
Root Mount Kit



The Silbar bollard light is a stylish and architectural light that is perfect for outdoor applications. The sleek, cylindrical shape is reminiscent of a whistle, and the tempered glass lens adds a touch of sophistication. The aluminum body is both impact- and corrosion resistant, making it ideal for use in harsh outdoor environments. Available in a choice of 800 or 1000mm heights each delivering 15W of 3000K light.

Dimensions in mm



Wattage	15W
Efficacy	70Lm/W
Finish	Grey
CRI	>80 Ra
Beam Angle	130°
Operating Hours	50,000
IP Rating	IP65

Size	/P500 500mm height	/P1000 1000mm height
------	------------------------------	--------------------------------

Kelvin	Standard 3000K
--------	--------------------------



Code Example R301040/P800 - Silbar 800mm
Full part code breakdown on page 280.


Hydra flood light



A robust and lightweight die-cast aluminium floodlight, suitable for different exterior and industrial applications. With IP65, IK08 protection and a high efficacy of 120Lm/W, Hydra offers four power and size options to cover the needs of different environments.



Dimensions in mm

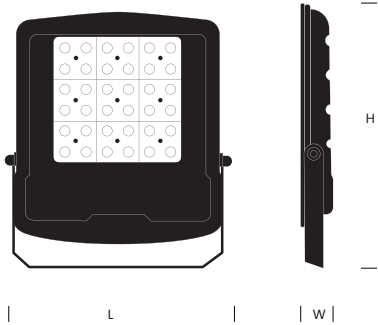


Finish	Black
Kelvin	5000K
CRI	>80 Ra
Beam Angle	145°
Operating Hours	50,000
SDCM	≤4
L70 B50	100,000 hours
IP Rating	IP65

Wattage	/50W	/100W	/150W	/200W
Size	H237 x L200 x W39	SizeH321 x L282 x W41	SizeH333 x L420 x W51	SizeH395 x L470 x W51
Lumens	5654Lm	Lumens13904Lm	Lumens19119Lm	Lumens27744Lm
Wattage	50W	Wattage100W	Wattage150W	Wattage200W



Exterior wall pack IP65 and IK10 rated, in three different finish options. Flosse is available in three outputs delivering up to 3500 lumens. With a modern and minimalist design, screw-less from front with back or side cable entry options, it is ideal for many different exterior applications.

Dimensions in mm

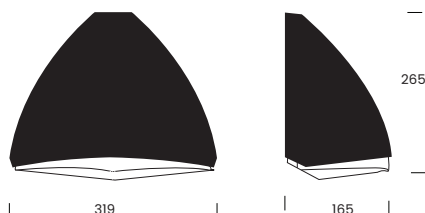

Wattage	15W
Efficacy	70Lm/W
CRI	>80 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤6
IP Rating	IP65


5 YR
WARRANTY

Kelvin	/3K		/4K	
	13W	1711Lm	13W	1757Lm
	18W	2385Lm	18W	2453Lm
	28W	3403Lm	28W	3487Lm

Colour	/BK	/WT	/AN
	Black body	White body	Anthracite body

Wattage	/13W	/18W	/28W
	13W	18W	28W

Options	/E	/MW
	3 hour emergency	Sensor

Code Example R301301/BK/3K/18W/E - Flosse 18W, black body in 3000K with emergency.
Full part code breakdown on page 281.


Bulkheads



A surface mounted luminaire with subtle architectural styling ideal for decorative interior and exterior applications. With a black or grey cast aluminium body and a TP(a) opal diffuser, Iris also offers an eyelid version. Integral emergency and microwave detector options are available too, as well as combinations.



Dimensions in mm

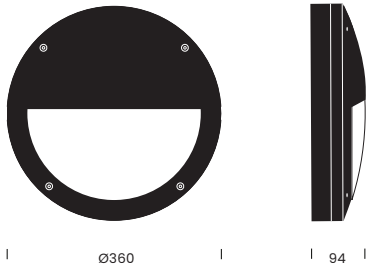

Kelvin	4000K
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤
L70 B50	70,000 hours
IP Rating	IP65

Colour	/BK Black body	/GR Grey Body
--------	--------------------------	-------------------------

Wattage	/18W	/22W
Wattage	18W	22W
Open	1831Lm	2241Lm
Eyelid	1561Lm	1910Lm

Model		
	/OP Open	/EY Eyelid

Options	/DH Mains dimming	/DD DALI dimming	/DL 0-10V dimming	/DSI DSI dimming	/MW Sensor	/E 3 hour emergency	/E-Z10 Z10 Integral emergency with remote control testing
---------	-----------------------------	----------------------------	-----------------------------	----------------------------	----------------------	-------------------------------	---

Code Example R181701/BK/18W/OP - Iris 18W 4000K Black Finish Open
Full part code breakdown on page 281.



Hallam Towers in Sheffield.
Iris with eyelid.


Alphard Round



A robust and lightweight die-cast aluminium floodlight, suitable for different exterior and industrial applications. With IP65, IK08 protection and a high efficacy of 120Lm/W, Hydra offers four power and size options to cover the needs of different environments.



Dimensions in mm

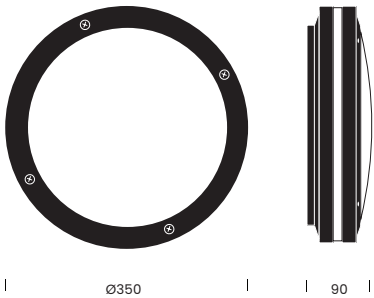

Wattage	24W
Efficacy	85Lm/W
Kelvin	5000K
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	70,000 hours
IP Rating	IP65

Colour

/BK
Black body standard

/WT
White Body

Kelvin

/4K
4000K

/5K
5000K

Options

/DH
Mains dimming

/DD
DALI dimming

/DL
0-10V dimming

/MW
Sensor

/E
3 hour emergency

/E-Z10
Z10 Integral emergency with remote control testing

Code Example R181101/4K - Black Alphard Bulkhead 24W 4000K
Full part code breakdown on page 281.



Local Blackfriars in Manchester.
Alphard Round.


Alphard Square



A surface mounted architectural halo bulkhead with a cast aluminium IK10 rated body, black as standard. It is designed for optimal light diffusion, ideal for decorative interior and exterior applications. Integral emergency and microwave detector options are available as well as combinations.



Dimensions in mm

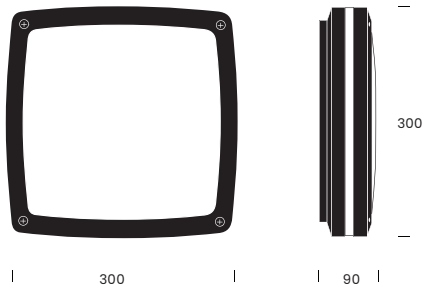

Wattage	24W
Efficacy	85lm/W
Kelvin	4000K
CRI	>90 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤3
L70 B50	70,000 hours
IP Rating	IP65

Colour

/BK	/WT
Black body standard	White Body


Kelvin

/4K	/5K
4000K	5000K

Options


/DH	/DD	/DL	/MW	/E	/E-Z10
Mains dimming	DALI dimming	0-10V dimming	Sensor	3 hour emergency	Z10 Integral emergency with remote control testing

Code Example R181301/4K/E - Black Alphard Square Bulkhead 24W 4000K Emergency
Full part code breakdown on page 282.



Surface mounted LED luminaire that is particularly fast and easy to install. IP65 rated, Victus is suitable for high humidity areas and can be used for interior or exterior applications. White as standard, it is also available with integral microwave, emergency or combination

Dimensions in mm

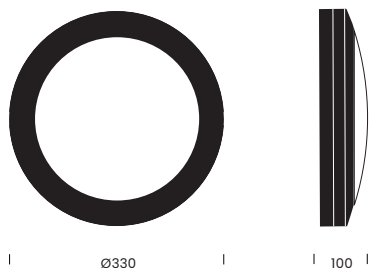

Wattage	14W
Efficacy	92lm/W
Kelvin	4000K
CRI	>82 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP65



Options

/DH

Mains
dimming

/DD

DALI
dimming

/DL

0-10V
dimming

/DSI

DSI
dimming


/MW

Sensor

/E

3 hour
emergency

Accessories



Code Example


R181801/MW/E - Victus Bulkhead 14W 4000K Emergency & Microwave Sensor
Full part code breakdown on page 281.

R18-01

Victus chrome
bezel

Industrial lighting

Thanos multi bay




Thanos is a linear light low bay to high bay, with a choice of racking aisle optics using a narrow lens to direct the light as required for the aisle lighting. It offers a choice of speciality beam angles of 30°, 60° and 120° depending required spread. IK10 rating is available with wire guard. It is suitable for various installation types such as surface mounted, suspended, trunking and conduit pendant.

5 YR
WARRANTY



Dimensions in mm



Efficacy	150Lm/W
Kelvin	4000K
CRI	>80 Ra
Beam Angle	120° Standard
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP40

Wattage	/70W	/100W	/150W	/200W
Wattage	70W	Wattage 100W	Wattage 150W	Wattage 200W
Lumens	10862Lm	Lumens 15010Lm	Lumens 22530Lm	Lumens 28015Lm
Length	600	Length 600	Length 600	Length 600
	/320W			
Wattage	320W			
Lumens	41857Lm			
Length	1200			

Beam Angle	/B30	/B60	Standard
	30 degree beam angle	60 degree beam angle	120 degree beam angle

Options	/E	/DD	/PIR
	3 hour emergency	DALI dimming	Sensor

Code Example R141400/70W - Thanos 70W 4000K 120° beam 0-10V dim
Full part code breakdown on page 282.


Accessories

R141-01	Conduit rod suspension kit
R141-03	Multiple application fixing bracket
R141-04	Wire guard



Canopus is a robust yet flexible IP65 aluminium multi-purpose LED high bay/ low bay offering a 7-year warranty. With adjustable beam angles and adjustable stirrup arm features ultimate flexibility in beam angle positioning. Canopus is available in three sizes/outputs with emergency and sensor options.

Dimensions in mm

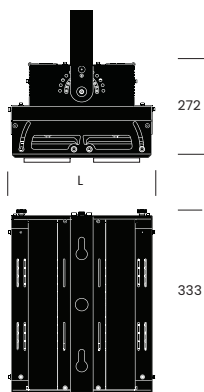

Efficacy	117Lm/W
Kelvin	5000K
CRI	>83 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP65



7 YR
WARRANTY

Wattage	01	02	03
Wattage	100W	Wattage 150W	Wattage 200W
Lumens	11742Lm	Lumens 16982Lm	Lumens 22846Lm
Length	257	Length 380	Length 499

Options	/DD	/DL	/PIR	/E
	DALI dimming	0-10V dimming	Sensor	3 hour emergency

Code Example R123101- Canopus 100W 5000K
Full part code breakdown on page 282.

Accessories



RE12
1M suspension chain


Titan switchable wattage & non-corrosive



The Titan is an industrial-grade LED light that is ideal for applications that require protection from dirt, dust, water, and impact. It features an IP65 and IK09 rated body, and can be surface mounted or suspended. The Titan is available in four different lengths and four switchable wattages. It is also available with plug in integrated emergency or PIR options.



Dimensions in mm

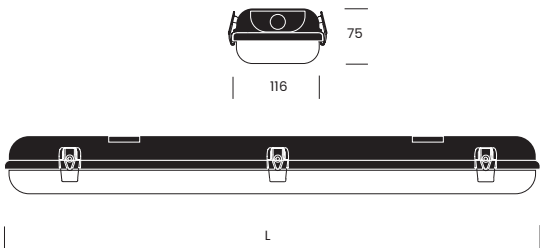

Efficacy	160lm/W
Kelvin	4000K
CRI	>80 Ra
Beam Angle	140°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP65

Size	06	12	15	18
Wattage	12W / 15W / 18W / 20W	24W / 30W / 37W / 40W	35W / 46W / 52W / 60W	Wattage 48W / 54W / 70W / 80W
Length	660	Length 1200	Length 1500	Length 1800

Accessories



Code Example R151012 - Titan 1.2m Switchable 24W/30W/37W/40W in 4000K
Full part code breakdown on page 282.

R1510-01
Suspension
pack





Orion is a highly efficient LED batten suitable for surface, suspended or trunking mounting. With over 130 lumens per watt, it comes in three lengths plus high output versions which makes it ideal for a number of different linear batten applications.



Dimensions in mm




Efficacy	130Lm/W
CRI	>85 Ra
Beam Angle	120°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP20

Wattage	0101		0102		0201		0202	
	Wattage	25W	Wattage	45W	Wattage	35W	Wattage	60W
	Lumens	3251Lm	Lumens	5853Lm	Lumens	4552Lm	Lumens	7803Lm
	Length	1170	Length	1170	Length	1470	Length	1470
	0301		0302					
	Wattage	45W	Wattage	70W				
	Lumens	5852Lm	Lumens	9103Lm				
	Length	1734	Length	1734				

Kelvin	/4K	Standard
	4000K	5000K

Options	/DD	/DL	/DSI	/PIR	/E
	DALI dimming	0-10V dimming	DSI dimming	Sensor	3 hour emergency

Accessories




R28-01
1.5m suspension kit

Code Example R280101/4K - Orion Batten 1.2m 25W 4000K
Full part code breakdown on page 283.



Academy is a series of curved profile linear luminaires with opal TP(a) diffusers for surface mounting or suspension, often used for school and hospital lighting. The series comes in three lengths and 4000K, with integral emergency curved linear light and dimming options.

Dimensions in mm



Efficacy	120lm/W
Kelvin	4000K
CRI	>85 Ra
Beam Angle	140°
Operating Hours	50,000
SDCM	≤4
L70 B50	70,000 hours
IP Rating	IP20




Length	12	15	18
	1200mm	1500mm	1800mm

Wattage	/20W	/40W	/30W	/60W	/40W	/68W
	Academy 1.2m	Academy 1.2m	Academy 1.5m	Academy 1.5m	Academy 1.8m	Academy 1.8m

Options	/DD	/DL	/DSI	/PIR	/E	/MW
	DALI dimming	0-10V dimming	DSI dimming	Sensor	3 hour emergency	MW Sensor

Code Example R250012/20W - Academy 1.2m 20W 4000K
Full part code breakdown on page 283.

Accessories



R28-01
1.5m suspension kit

Emergency lighting


Soar II IP65 emergency downlight



Multi purpose surface mounted emergency IP65 downlight, offering both open area and escape route optics. It comes with integral driver and LiFePO4 battery pack which can be ordered as self test or manual test versions. Available as a round or a square version.



Dimensions in mm

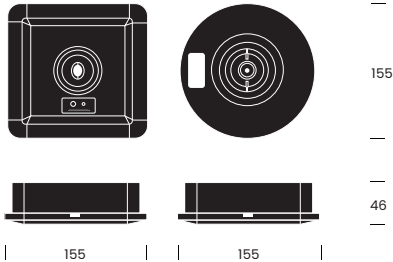

Wattage	2W
Efficacy	115 Lm/W
Kelvin	6500K
CRI	>80 Ra
Beam Angle	150° (Corridor) 80x30° (Open area)
Battery	LiFePO4
Operating Hours	30,000
Maintained	Non maintained
IP Rating	IP65

Shape



- 60**
Round
- 61**
Square

Emergency type

- /ST**
Self Test (only available for the white model)
- /MT**
Manual Test

Colour

- /WT**
White
- /BK**
Black


Code Example R221560/MT/BK - Soar 2 Manual test Round Surface Emergency Light in Black 2W
Full part code breakdown on page 283.

Vanguard III emergency downlight



Self-test stand alone 3 hour LED emergency recessed downlight using a LiFePO4 (Lithium Phosphate) battery. It is available with open area and corridor optic options included and comes with integrated electronics.

Dimensions in mm



Wattage	3W
Lumen	241
Kelvin	6000K
CRI	>75 Ra
Beam Angle	108°
Battery	LiFePO4
Maintained	Non maintained
Operating Hours	30,000
Battery Duration	>3 hours
IP Rating	IP20



Model **/ALL**
Open area & corridor included

Code Example R221503/ALL - Vanguard 3.5W 6000K Non-Maintained - Open and Corridor optics included. Full part code breakdown on page 283.


Gemini twin spot



Gemini is a cost effective 3 hour LED emergency twinflood for both interior and exterior applications. It offers high specification optic design, coming supplied with hanging kit for downward pointing installation and integral driver and NiCd battery pack.



Dimensions in mm

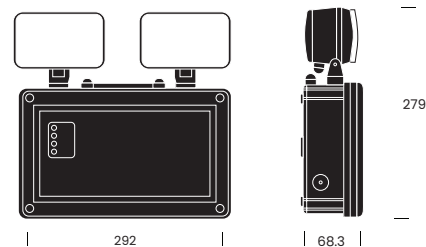


Wattage	2x 3W
Lumens	368
Kelvin	6500K
CRI	>75 Ra
Beam Angle	60°
Battery	Ni-Cd
Maintained	Non maintained
Operating Hours	30,000
Battery Duration	>3 hours
IP Rating	IP65

Emergency Pack

Emergency Pack is a 3-Hour Emergency kit for RICOMAN downlights and panel lights.

Dimensions in mm

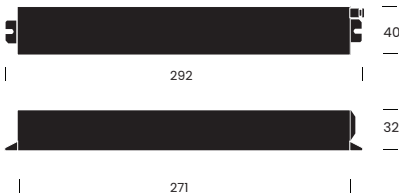


Wattage	3.6W
Lumens	BLF 10%
CRI	>80 Ra
Beam Angle	140°
Operating Hours	>30000
Battery	Ni-Cd
Maintained	Yes
Battery Duration	>3 hours
Recharge Time	24 hours



Options	(SM)	(DC)	(CN)	(SM2)
	Compatible with RICOMAN downlights	Compatible with RICOMAN panel lights	Compatible with RICOMAN tunable downlights	Compatible with RICOMAN Titan Non Corrosive


Blade Exit Sign



Blade is a 3-hour LED emergency exit sign offering ease of installation along with a sleek aesthetic, accommodating nearly all installation scenarios including surface, recessed, suspended and side mounting. All mounting kits and all legends are included




Dimensions in mm

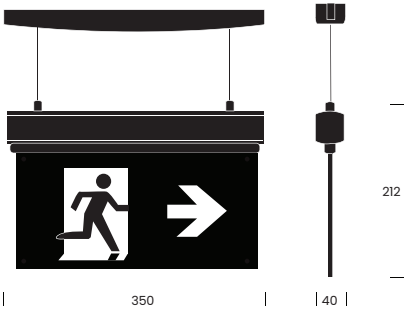

Wattage	2W
Lumens	20
Beam Angle	108°
Battery	Ni-Cd
Maintained	Non maintained
Operating Hours	30,000
Battery Duration	>3 hours


Model /ALL
All Legends included

Salus II IP65 emergency exit bulkhead



Salus is a maintained or non maintained emergency bulkhead exit sign with IP65 body. The ultra-slim profile LED polycarbonate bulkhead can also be recessed and there is a hinged screw less gear tray for ease of installation.

Dimensions in mm

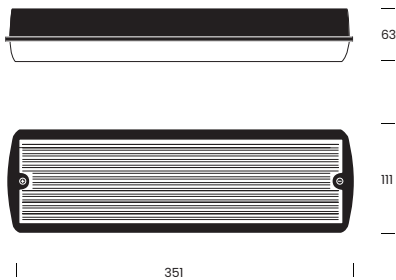

Wattage	3W
Lumens	150 Lm
Kelvin	6500K
CRI	>80 Ra
Beam Angle	120°
Operating Hours	>30000
Self-test	Yes
Manual test	Yes



Options	/ST	/MT	/NL	/E-Z10
	Self test	Manual test	No legends	Z10 Remote control integral emergency

Code Example R231202/ST - Salus II Self Test Bulkhead 3W 6500K All legends. Full part code breakdown on page 282.

Accessories



R23-01
Semi-recessed frame



R23-02
Salus II IP65 ceiling exit sign kit

Info

How to navigate a product page.

①

R09B201

Pulsar pendant

⑤



Pulsar is a modern pendant combining efficacy with elegance. With a minimalistic, contemporary design and durable aluminium construction it can add a touch of subtle stylish architectural lighting in domestic or commercial spaces. The same style luminaire is also available in surface mounted, recessed and track mounted version.

5 YR WARRANTY



Dimensions in mm



Up to 1500
256
ø65

⑥

Wattage	10W
Efficacy	90 lm/W
CRI	>90 Ra
Beam Angle	38° Standard
Operating Hours	50,000
SDCM	≤3
L70 B50	100,000 hours
IP Rating	IP20

Kelvin

②

/3K

3000K

③

Standard

4000K

Colour



/BK

Black finish

/WT

White finish

Beam angle

/15

15 degree beam angle

/24

24 degree beam angle

Standard

38 degree beam angle

/55

55 degree beam angle

④

Code Example

R09B201/3K/BK - Pulsar pendant 10W, 38° beam angle in 3000K in black.
Full part code breakdown on page 50.

- ①

Start of product code

Use the reference mention to start creating your product code.
- ②

Add info to the product code

Use the custom code references to customise your products.
- ③

No added info needed

When standard is showing, no additional code is necessary.
- ④

Code Example

At the end of each product page you will find a code example for reference.
- ⑤


Mounting icon

Visit the icon page for more detailed information on each icon.
- ⑥

Technical information

For any further information not available in the catalogue, please visit our website or datasheets.

Find all our website features.

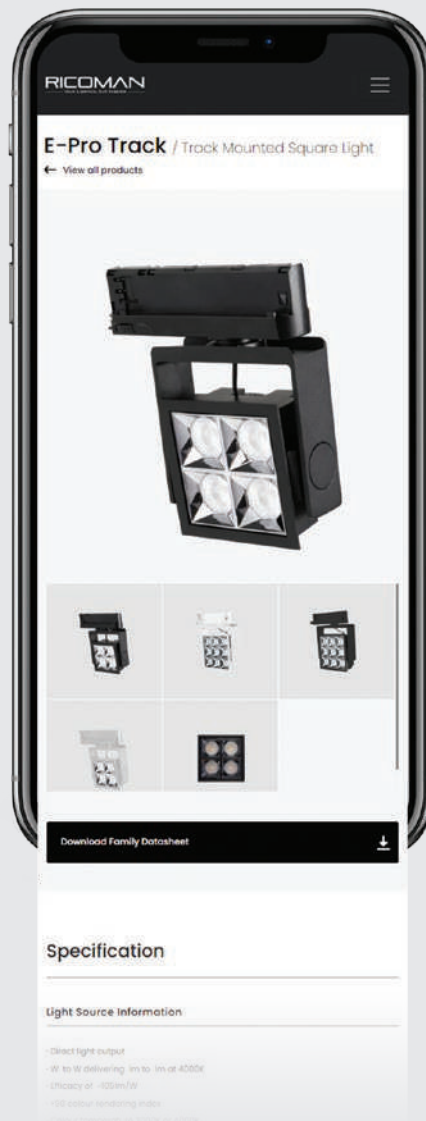

Product Info & Downloads

Find everything you need for our products in one place. Visit our website to access datasheets, LDT files, and product instructions.

Project Builder

Use the project builder feature to manage your lighting project and send it directly to our team.

Get Inspired

Visit and download our case studies page and get inspired with our lighting solutions.

Product part code index

Estrella Pro Opal Diffuser



Pg. 26

R340501/7W	Estrella Pro Opal 0.5m 7W	
R340501/14W	Estrella Pro Opal 0.5m 14W	L532 x W50 x H100
R340501/26W	Estrella Pro Opal 0.5m 26W	
R341101/14W	Estrella Pro Opal 1.1m 14W	
R341101/28W	Estrella Pro Opal 1.1m 28W	L1064 x W50 x H100
R341101/52W	Estrella Pro Opal 1.1m 52W	
R341601/21W	Estrella Pro Opal 1.6m 21W	
R341601/42W	Estrella Pro Opal 1.6m 42W	L1596 x W50 x H100
R341601/78W	Estrella Pro Opal 1.6m 78W	
R342101/28W	Estrella Pro Opal 2.1m 28W	L2128 x W50 x H100
R342101/56W	Estrella Pro Opal 2.1m 56W	
R340101	Estrella Pro Opal 'L' Shape	159 x 159
R340201	Estrella Pro Opal 'T' Shape	159 x 267
R340301	Estrella Pro Opal '+' Shape	267 x 267
R350501/7W	Estrella Pro Recessed Opal 0.5m 7W	
R350501/14W	Estrella Pro Recessed Opal 0.5m 14W	L538 x W64 x H47
R350501/26W	Estrella Pro Recessed Opal 0.5m 26W	
R351101/14W	Estrella Pro Recessed Opal 1.1m 14W	
R351101/28W	Estrella Pro Recessed Opal 1.1m 28W	L1070 x W64 x H47
R351101/52W	Estrella Pro Recessed Opal 1.1m 52W	
R351601/21W	Estrella Pro Recessed Opal 1.6m 21W	
R351601/42W	Estrella Pro Recessed Opal 1.6m 42W	L1602 x W64 x H47
R351601/78W	Estrella Pro Recessed Opal 1.6m 78W	
R352101/28W	Estrella Pro Recessed Opal 2.1m 28W	L2134 x W51 x H47
R352101/56W	Estrella Pro Recessed Opal 2.1m 56W	
R350101	Estrella Pro Recessed Opal 'L' Shape	172 x W172

Estrella Pro Square Aperture



Pg. 26

R340502/7W	Estrella Pro S. Aperture 0.5m 7W	
R340502/14W	Estrella Pro S. Aperture 0.5m 14W	L532 x W50 x H100
R340502/26W	Estrella Pro S. Aperture 0.5m 26W	
R341102/14W	Estrella Pro S. Aperture 1.1m 14W	
R341102/28W	Estrella Pro S. Aperture 1.1m 28W	L1064 x W50 x H100
R341102/52W	Estrella Pro S. Aperture 1.1m 52W	
R341602/21W	Estrella Pro S. Aperture 1.6m 21W	
R341602/42W	Estrella Pro S. Aperture 1.6m 42W	L1596 x W50 x H100
R341602/78W	Estrella Pro S. Aperture 1.6m 78W	
R342102/28W	Estrella Pro S. Aperture 2.1m 28W	L2128 x W50 x H100
R342102/56W	Estrella Pro S. Aperture 2.1m 56W	
R340102	Estrella Pro S. Aperture 'L' Shape	159 x 159

Pg. 26	R340202	Estrella Pro S.Aperture 'T' Shape	159 x 267
	R340302	Estrella Pro S.Aperture '+' Shape	267 x 267
	R350502/7W	Estrella Pro Recessed S.Aperture 0.5m 7W	
	R350502/14W	Estrella Pro Recessed S.Aperture 0.5m 14W	L538 x W64 x H47
	R350502/26W	Estrella Pro Recessed S.Aperture 0.5m 26W	
	R351102/14W	Estrella Pro Recessed S.Aperture 1.1m 14W	
	R351102/28W	Estrella Pro Recessed S.Aperture 1.1m 28W	L1070 x W64 x H47
	R351102/52W	Estrella Pro Recessed S.Aperture 1.1m 52W	
	R351602/21W	Estrella Pro Recessed S.Aperture 1.6m 21W	
	R351602/42W	Estrella Pro Recessed S.Aperture 1.6m 42W	L1602 x W64 x H47
	R351602/78W	Estrella Pro Recessed S.Aperture 1.6m 78W	
	R352102/28W	Estrella Pro Recessed S.Aperture 2.1m 28W	
	R352102/56W	Estrella Pro Recessed S.Aperture 2.1m 56W	L2134 x W64 x H47
	R350102	Estrella Pro Recessed S.Aperture 'L' Shape	172 x 172
Pg. 26	R340503/7W	Estrella Pro R.Aperture 0.5m 7W	
	R340503/14W	Estrella Pro R.Aperture 0.5m 14W	L532 x W50 x H100
	R340503/26W	Estrella Pro R.Aperture 0.5m 26W	
	R341103/14W	Estrella Pro R.Aperture 1.1m 14W	
	R341103/28W	Estrella Pro R.Aperture 1.1m 28W	L1064 x W50 x H100
	R341103/52W	Estrella Pro R.Aperture 1.1m 52W	
	R341603/21W	Estrella Pro R.Aperture 1.6m 21W	
	R341603/42W	Estrella Pro R.Aperture 1.6m 42W	L1596 x W50 x H100
	R341603/78W	Estrella Pro R.Aperture 1.6m 78W	
	R342103/28W	Estrella Pro R.Aperture 2.1m 28W	
	R342103/56W	Estrella Pro R.Aperture 2.1m 56W	L2128 x W50 x H100
	R340103	Estrella Pro R.Aperture 'L' Shape	159 x 159
	R340203	Estrella Pro R.Aperture 'T' Shape	159 x 267
	R340303	Estrella Pro R.Aperture '+' Shape	267 x 267
	R350503/7W	Estrella Pro Recessed R.Aperture 0.5m 7W	
	R350503/14W	Estrella Pro Recessed R.Aperture 0.5m 14W	L538 x W64 x H47
	R350503/26W	Estrella Pro Recessed R.Aperture 0.5m 26W	
	R351103/14W	Estrella Pro Recessed R.Aperture 1.1m 14W	
	R351103/28W	Estrella Pro Recessed R.Aperture 1.1m 28W	L1070 x W64 x H47
	R351103/52W	Estrella Pro Recessed R.Aperture 1.1m 52W	
	R351603/21W	Estrella Pro Recessed R.Aperture 1.6m 21W	
	R351603/42W	Estrella Pro Recessed R.Aperture 1.6m 42W	L1602 x W64 x H47
	R351603/78W	Estrella Pro Recessed R.Aperture 1.6m 78W	
	R352103/28W	Estrella Pro Recessed R.Aperture 2.1m 28W	L2134 x W64 x H47W

Estrella Pro Round Aperture



Product part code index

Pg. 26	R352103/56W	Estrella Pro Recessed R.Aperture 2.1m 56W	L2134 x W64 x H47W
	R350103	Estrella Pro Recessed R.Aperture 'L' Shape	172 x 172
Estrella Pro Wallwash			
Pg. 26	R340504/7W	Estrella Pro Wallwash 0.5m 7W	
	R340504/14W	Estrella Pro Wallwash 0.5m 14W	L532 x W50 x H100
	R340504/26W	Estrella Pro Wallwash 0.5m 26W	
	R341104/14W	Estrella Pro Wallwash 1.1m 14W	
	R341104/28W	Estrella Pro Wallwash 1.1m 28W	L1064 x W50 x H100
	R341104/52W	Estrella Pro Wallwash 1.1m 52W	
	R341604/21W	Estrella Pro Wallwash 1.6m 21W	
	R341604/42W	Estrella Pro Wallwash 1.6m 42W	L1596 x W50 x H100
	R341604/78W	Estrella Pro Wallwash 1.6m 78W	
	R342104/28W	Estrella Pro Wallwash 2.1m 28W	
	R342104/56W	Estrella Pro Wallwash 2.1m 56W	L2128 x W50 x H100
	R350504/7W	Estrella Pro Recessed Wallwash 0.5m 7W	
	R350504/14W	Estrella Pro Recessed Wallwash 0.5m 14W	L538 x W64 x H47mm
	R350504/26W	Estrella Pro Recessed Wallwash 0.5m 26W	
	R351104/14W	Estrella Pro Recessed Wallwash 1.1m 14W	
	R351104/28W	Estrella Pro Recessed Wallwash 1.1m 28W	L1070 x W64 x H47
	R351104/52W	Estrella Pro Recessed Wallwash 1.1m 52W	
	R351604/21W	Estrella Pro Recessed Wallwash 1.6m 21W	
	R351604/42W	Estrella Pro Recessed Wallwash 1.6m 42W	L1602 x W64 x H47
	R351604/78W	Estrella Pro Recessed Wallwash 1.6m 78W	
	R352104/28W	Estrella Pro Recessed Wallwash 2.1m 28W	
	R352104/56W	Estrella Pro Recessed Wallwash 2.1m 56W	L2134 x W64 x H47
Estrella Pro Dark Louvre			
Pg. 26	R340505/7W	Estrella Pro Dark Louvre 0.5m 7W	
	R340505/14W	Estrella Pro Dark Louvre 0.5m 14W	L532 x W50 x H100
	R340505/26W	Estrella Pro Dark Louvre 0.5m 26W	
	R341105/14W	Estrella Pro Dark Louvre 1.1m 14W	
	R341105/28W	Estrella Pro Dark Louvre 1.1m 28W	L1064 x W50 x H100
	R341105/52W	Estrella Pro Dark Louvre 1.1m 52W	
	R341605/21W	Estrella Pro Dark Louvre 1.6m 21W	
	R341605/42W	Estrella Pro Dark Louvre 1.6m 42W	L1596 x W50 x H100
	R341605/78W	Estrella Pro Dark Louvre 1.6m 78W	
	R342105/28W	Estrella Pro Dark Louvre 2.1m 28W	
	R342105/56W	Estrella Pro Dark Louvre 2.1m 56W	L2128 x W50 x H100
	R340105	Estrella Pro Dark Louvre 'L' Shape	159 x 159
	R340205	Estrella Pro Dark Louvre 'T' Shape	159 x 267
	R340305	Estrella Pro Dark Louvre '+' Shape	267 x 267

Pg. 26 Estrella Pro Mirror Louvre 	Pg. 26	R350505/7W	Estrella Pro Recessed Dark Louvre 0.5m 7W	
		R350505/14W	Estrella Pro Recessed Dark Louvre 0.5m 14W	L538 x W64 x H47mm
		R350505/26W	Estrella Pro Recessed Dark Louvre 0.5m 26W	
		R351105/14W	Estrella Pro Recessed Dark Louvre 1.1m 14W	
		R351105/28W	Estrella Pro Recessed Dark Louvre 1.1m 28W	L1070 x W64 x H47
		R351105/52W	Estrella Pro Recessed Dark Louvre 1.1m 52W	
		R351605/21W	Estrella Pro Recessed Dark Louvre 1.6m 21W	
		R351605/42W	Estrella Pro Recessed Dark Louvre 1.6m 42W	L1602 x W64 x H47
		R351605/78W	Estrella Pro Recessed Dark Louvre 1.6m 78W	
		R352105/28W	Estrella Pro Recessed Dark Louvre 2.1m 28W	
		R352105/56W	Estrella Pro Recessed Dark Louvre 2.1m 56W	L2134 x W64 x H47
		R350105	Estrella Pro Recessed Dark Louvre 'L' Shape	172 x 172
		R340506/7W	Estrella Pro Mirror Louvre 0.5m 7W	
		R340506/14W	Estrella Pro Mirror Louvre 0.5m 14W	L532 x W50 x H100
		R340506/26W	Estrella Pro Mirror Louvre 0.5m 26W	
		R341106/14W	Estrella Pro Mirror Louvre 1.1m 14W	
		R341106/28W	Estrella Pro Mirror Louvre 1.1m 28W	L1064 x W50 x H100
		R341106/52W	Estrella Pro Mirror Louvre 1.1m 52W	
		R341606/21W	Estrella Pro Mirror Louvre 1.6m 21W	
		R341606/42W	Estrella Pro Mirror Louvre 1.6m 42W	L1596 x W50 x H100
		R341606/78W	Estrella Pro Mirror Louvre 1.6m 78W	
	Pg. 26	R342106/28W	Estrella Pro Mirror Louvre 2.1m 28W	
		R342106/56W	Estrella Pro Mirror Louvre 2.1m 56W	L2128 x W50 x H100
		R340106	Estrella Pro Mirror Louvre 'L' Shape	159 x 159
		R340206	Estrella Pro Mirror Louvre 'T' Shape	159 x 267
		R340306	Estrella Pro Mirror Louvre '+' Shape	267 x 267
		R350506/7W	Estrella Pro Recessed Mirror Louvre 0.5m 7W	
		R350506/14W	Estrella Pro Recessed Mirror Louvre 0.5m 14W	L538 x W64 x H47mm
		R350506/26W	Estrella Pro Recessed Mirror Louvre 0.5m 26W	
		R351106/14W	Estrella Pro Recessed Mirror Louvre 1.1m 14W	
		R351106/28W	Estrella Pro Recessed Mirror Louvre 1.1m 28W	L1070 x W64 x H47
		R351106/52W	Estrella Pro Recessed Mirror Louvre 1.1m 52W	
		R351606/21W	Estrella Pro Recessed Mirror Louvre 1.6m 21W	
		R351606/42W	Estrella Pro Recessed Mirror Louvre 1.6m 42W	L1602 x W64 x H47
		R351606/78W	Estrella Pro Recessed Mirror Louvre 1.6m 78W	
		R352106/28W	Estrella Pro Recessed Mirror Louvre 2.1m 28W	
		R352106/56W	Estrella Pro Recessed Mirror Louvre 2.1m 56W	L2134 x W64 x H47
		R350106	Estrella Pro Recessed Mirror Louvre 'L' Shape	172 x 172

Product part code index

Estrella Pro White Louvre



Pg. 26

R340507/7W	Estrella Pro White Louvre 0.5m 7W	
R340507/14W	Estrella Pro White Louvre 0.5m 14W	L532 x W50 x H100
R340507/26W	Estrella Pro White Louvre 0.5m 26W	
R341107/14W	Estrella Pro White Louvre 1.1m 14W	
R341107/28W	Estrella Pro White Louvre 1.1m 28W	L1064 x W50 x H100
R341107/52W	Estrella Pro White Louvre 1.1m 52W	
R341607/21W	Estrella Pro White Louvre 1.6m 21W	
R341607/42W	Estrella Pro White Louvre 1.6m 42W	L1596 x W50 x H100
R341607/78W	Estrella Pro White Louvre 1.6m 78W	
R342107/28W	Estrella Pro White Louvre 2.1m 28W	
R342107/56W	Estrella Pro White Louvre 2.1m 56W	L2128 x W50 x H100
R340107	Estrella Pro White Louvre 'L' Shape	159 x 159
R340207	Estrella Pro White Louvre 'T' Shape	159 x 267
R340307	Estrella Pro White Louvre '+' Shape	267 x 267
R350507/7W	Estrella Pro Recessed White Louvre 0.5m 7W	
R350507/14W	Estrella Pro Recessed White Louvre 0.5m 14W	L538 x W64 x H47mm
R350507/26W	Estrella Pro Recessed White Louvre 0.5m 26W	
R351107/14W	Estrella Pro Recessed White Louvre 1.1m 14W	
R351107/28W	Estrella Pro Recessed White Louvre 1.1m 28W	L1070 x W64 x H47
R351107/52W	Estrella Pro Recessed White Louvre 1.1m 52W	
R351607/21W	Estrella Pro Recessed White Louvre 1.6m 21W	
R351607/42W	Estrella Pro Recessed White Louvre 1.6m 42W	L1602 x W64 x H47
R351607/78W	Estrella Pro Recessed White Louvre 1.6m 78W	
R352107/28W	Estrella Pro Recessed White Louvre 2.1m 28W	
R352107/56W	Estrella Pro Recessed White Louvre 2.1m 56W	L2134 x W64 x H47
R350107	Estrella Pro Recessed White Louvre 'L' Shape	172 x 172

Estrella Pro UGR



Pg. 26

R340509/7W	Estrella Pro UGR 0.5m 7W	
R340509/14W	Estrella Pro UGR 0.5m 14W	L532 x W50 x H100
R340509/26W	Estrella Pro UGR 0.5m 26W	
R341109/14W	Estrella Pro UGR 1.1m 14W	
R341109/28W	Estrella Pro UGR 1.1m 28W	L1064 x W50 x H100
R341109/52W	Estrella Pro UGR 1.1m 52W	
R341609/21W	Estrella Pro UGR 1.6m 21W	
R341609/42W	Estrella Pro UGR 1.6m 42W	L1596 x W50 x H100
R341609/78W	Estrella Pro UGR 1.6m 78W	
R342109/28W	Estrella Pro UGR 2.1m 28W	
R342109/56W	Estrella Pro UGR 2.1m 56W	L2128 x W50 x H100
R340109	Estrella Pro UGR 'L' Shape	159 x 159

Flow	Pg. 26	R340209	Estrella Pro UGR 'T' Shape	159 x 267
		R340309	Estrella Pro UGR '+' Shape	267 x 267
		R350509/7W	Estrella Pro Recessed UGR 0.5m 7W	L538 x W64 x H47mm
		R350509/14W	Estrella Pro Recessed UGR 0.5m 14W	
		R350509/26W	Estrella Pro Recessed UGR 0.5m 26W	
		R351109/14W	Estrella Pro Recessed UGR 1.1m 14W	L1070 x W64 x H47
		R351109/28W	Estrella Pro Recessed UGR 1.1m 28W	
		R351109/52W	Estrella Pro Recessed UGR 1.1m 52W	
		R351609/21W	Estrella Pro Recessed UGR 1.6m 21W	L1602 x W64 x H47
		R351609/42W	Estrella Pro Recessed UGR 1.6m 42W	
		R351609/78W	Estrella Pro Recessed UGR 1.6m 78W	
		R352109/28W	Estrella Pro Recessed UGR 2.1m 28W	L2134 x W64 x H47
		R352109/56W	Estrella Pro Recessed UGR 2.1m 56W	
		R350109	Estrella Pro Recessed UGR 'L' Shape	172 x 172
		R3611250	Flow straight profile 45W 2500mm	L2500 x 35 x 35



	Pg. 36	R361330	Flow downward arc 90° arc light 5W (1/4 of a 320mm diameter circle)	L250 x 35 x 35
		R361280	Flow downward arc 45° 6W (1/8 of a 800mm diameter circle)	L310 x 35 x 35
		R361380	Flow downward arc 90° 11W (1/4 of a 800mm diameter circle)	L630 x 35 x 35
		R3612150	Flow downward arc 45° 11W (1/8 of a 1500mm diameter circle)	L590 x 35 x 35
		R3613150	Flow downward arc 90° 22W (1/4 of a 1500mm diameter circle)	L1180 x 35 x 35
		R3612300	Flow downward arc 45° 20W (1/8 of a 3000mm diameter circle)	L1180 x 35 x 35



	Pg. 34	R3633150	Flow inward arc 90° 22W (1/4 of a 1500mm diameter circle)	L1180 x 35 x 35
		R3623150	Flow outward arc 90° 22W 1500mm (1/4 of a 1500mm diameter circle)	L1180 x 35 x 35

Product part code index

	Pg. 36	R36440	Flow left twist 90° 8W 400mm	L400 x 35 x 35
		R36540	Flow right twist 90° 8W 400mm	L400 x 35 x 35
		R36650	Flow 180° twist 10W 500mm	L500 x 35 x 35

Astrowave

	Pg. 44	R751000/23K	24V Astrowave 2300K	Up to 5m length, 25mm diameter
		R751000/27K	24V Astrowave 2700K	
		R751000/3K	24V Astrowave 3000K	
		R751000/4K	24V Astrowave 4000K	
		R752000/23K	48V Astrowave 2300K	Up to 20m length, 25mm diameter
		R752000/27K	48V Astrowave 2700K	
		R752000/3K	48V Astrowave 3000K	
		R752000/4K	48V Astrowave 4000K	

SPI & RGB Astrowave

	Pg. 44	R751000/RGB/WT/SE	Astrowave RGB White Diffuser Side Entry	Up to 5m length, 25mm diameter
		R751000/RGB/WT/ECE	Astrowave RGB White Diffuser End Cap Entry	
		R751000/RGB/BK/SE	Astrowave RGB Black Diffuser Side Entry	
		R751000/RGB/BK/ECE	Astrowave RGB Black Diffuser End Cap Entry	
		R751000/SPI/WT/SE	Astrowave SPI White Diffuser Side Entry	
		R751000/SPI/WT/ECE	Astrowave SPI White Diffuser End Cap Entry	
		R751000/SPI/BK/SE	Astrowave SPI Black Diffuser Side Entry	
		R751000/SPI/BK/ECE	Astrowave SPI Black Diffuser End Cap Entry	

Neon Flex



Pg. 50

R710101	Neon Flex 3000K 5000mm	L5000 x H20 x W12
---------	------------------------	-------------------

Aeroline



Pg. 52

R240101	Aeroline 0.15m 2.5W 3000K	L150 x H8 x W18
R240102	Aeroline 0.15m 2.5W 6000K	
R240201	Aeroline 0.3m 5W 3000K	L300 x H8 x W18
R240202	Aeroline 0.3m 5W 6000K	
R240301	Aeroline 0.6m 9W 3000K	L600 x H8 x W18
R240302	Aeroline 0.6m 9W 6000K	
R240401	Aeroline 0.9m 14W 3000K	L900 x H8 x W18
R240402	Aeroline 0.9m 14W 6000K	
R240501	Aeroline 1.0m 15W 3000K	L1000 x H8 x W18
R240502	Aeroline 1.0m 15W 6000K	
R240601	Aeroline 1.2m 16W 3000K	L1200 x H8 x W18
R240602	Aeroline 1.2m 16W 6000K	

COB Ricostrip



Pg. 54

R081010/27K/IP20	Ricostrip COB 2700K IP20	Up to 5m length, 8mm wide, cutting unit 50mm
R081010/3K/IP20	Ricostrip COB 3000K IP20	
R081010/4K/IP20	Ricostrip COB 4000K IP20	
R081010/65K/IP20	Ricostrip COB 6500K IP20	
R081010/27K/IP65	Ricostrip COB 2700K IP65	Up to 5m length, 10mm wide, cutting unit 50mm
R081010/3K/IP65	Ricostrip COB 3000K IP65	
R081010/4K/IP65	Ricostrip COB 4000K IP65	
R081010/65K/IP65	Ricostrip COB 6500K IP65	

Product part code index

SMD Ricostrip



Pg. 55

R081020/19K/SO	Ricostrip SMD 1900K Standard Output IP20
R081020/23K/SO	Ricostrip SMD 2300K Standard Outpt IP20
R081020/3K/SO	Ricostrip SMD 3000K Standard Output IP20
R081020/4K/SO	Ricostrip SMD 4000K Standard Output IP20
R081020/6K/SO	Ricostrip SMD 6000K Standard Output IP20
R081020/19K/HO/IP20	Ricostrip SMD 1900K High Output IP20
R081020/23K/HO/IP20	Ricostrip SMD 2300K High Output IP20
R081020/3K/HO/IP20	Ricostrip SMD 3000K High Output IP20
R081020/4K/HO/IP20	Ricostrip SMD 4000K High Output IP20
R081020/6K/HO/IP20	Ricostrip SMD 6000K High Output IP20
R081020/19K/HO/IP65	Ricostrip SMD 1900K High Output IP65
R081020/23K/HO/IP65	Ricostrip SMD 2300K High Output IP65
R081020/3K/HO/IP65	Ricostrip SMD 3000K High Output IP65
R081020/4K/HO/IP65	Ricostrip SMD 4000K High Output IP65
R081020/6K/HO/IP65	Ricostrip SMD 6000K High Output IP65

Up to 5m length, 8mm wide,
1.6mm height, cutting unit 50mm

Product part code index

Flow Ring Downwards



Pg.68

R361780	835mm Ring Lighting Downwards 50W	ø835 x 35 x 35
R3617150	1535mm Ring Lighting Downwards 90W	ø1535 x 35 x 35

Flow Ring Inwards



Pg.68

R3637150	1558mm Ring Lighting Inwards 99W	ø1558 x 35 x 35
----------	----------------------------------	-----------------

Flow Ring Outwards



Pg.68

R3627150	1558mm Ring Lighting Outwards 99W	ø1558 x 35 x 35
----------	-----------------------------------	-----------------

Sounds Like Light



Pg.74

R640500	Sounds Like Light Short Baffle	L607 x W78 x H160
R641100	Sounds Like Light Medium Baffle	L1139x W78 x H160
R641600	Sounds Like Light Long Baffle	L1672x W78 x H160
R642100	Sounds Like Light Extra Long Baffle	L2204 x W78 x H160
R640501/14W	Sounds Like Light Short 14W Light Baffle	L607 x W78 x H160
R641101/28W	Sounds Like Light Medium 28W Light Baffle	L1139x W78 x H160
R641601/42W	Sounds Like Light Long 42W Light Baffle	L1672x W78 x H160
R642101/56W	Sounds Like Light Extra Long 56W Light Baffle	L2204 x W78 x H160

Galaxia Up Ring



Pg. 80

R820302/3K/35W	Galaxia 25W Direct 10W Indirect 3000K	ø780 x H1500
R820302/3K/70W	Galaxia 49W Direct 21W Indirect 3000K	
R820302/4K/35W	Galaxia 25W Direct 10W Indirect 4000K	
R820302/4K/70W	Galaxia 49W Direct 21W Indirect 4000K	

Galaxia Triangulum



Pg. 80

R820401/20W	Galaxia Triangulum 20W Switchable 3000K-4000K	ø900 x 779 x H1500
R820401/40W	Galaxia Triangulum 40W Switchable 3000K-4000K	

Galaxia Hexagonal



Pg. 80

R820601/30W	Galaxia Hexagonal 30W Switchable 3000K-4000K	900 x 779 x H1500
R820601/60W	Galaxia Hexagonal 60W Switchable 3000K-4000K	

Nebula



Pg. 83

R101801/3K/60W	Nebula 60W 3000K	1200 x 350 x up to 1500
R101801/4K/60W	Nebula 60W 4000K	

Product part code index

FloraLume



Pg.84

R920302/3K/70W	FloraLume Round 49W Direct 21W Indirect 3000K	ø780x H1500
R920302/4K/70W	FloraLume Round 49W Direct 21W Indirect 4000K	
R920401/40W	FloraLume Triangulum 40W Switchable 3000K-4000K	900 x 779 x H1500
R920601/60W	FloraLume Hexagonal 60W Switchable 3000K-4000K	

Moon



Pg. 88

R820101/38W	MiniMoon 38W 3000K	ø585 x H86
R820102/38W	MiniMoon 38W 4000K	
R820103/38W	MiniMoon 38W 5000K	
R820101/48W	MiniMoon 48W 3000K	
R820102/48W	MiniMoon 48W 4000K	
R820103/48W	MiniMoon 48W 5000K	
R820201/76W	SuperMoon 76W 3000K	ø875 x H86
R820202/76W	SuperMoon 76W 4000K	
R820203/76W	SuperMoon 76W 5000K	
R820201/96W	SuperMoon 96W 3000K	
R820202/96W	SuperMoon 96W 4000K	
R820203/96W	SuperMoon 96W 5000K	

Pulsar Pendant



Pg.92

R096201	Pulsar Pendant 10W 4000K	ø65 x H256 x Up to 1500mm
R096201/3K	Pulsar Pendant 10W 3000K	

Product part code index

Neptune



Pg.104

R093110/8W	Neptune 100mm Downlight 8W	ø110 x H62
R093110/16W	Neptune 100mm Downlight 16W	
R093115/12W	Neptune 150mm Downlight 12W	ø165 x H90
R093115/22W	Neptune 150mm Downlight 22W	
R093117/13W	Neptune 170mm Downlight 13W	ø180 x H100
R093117/26W	Neptune 170mm Downlight 26W	
R093120/16W	Neptune 200mm Downlight 16W	ø218 x H113
R093120/32W	Neptune 200mm Downlight 32W	

E-pro Recessed



Pg.106

R093701	E-Pro Recessed single cell 5W	54 x 54 x 47
R093703/6W	E-Pro Recessed 1x3 cells 6W	130 x 54 x 47
R093703/12W	E-Pro Recessed 1x3 cells 12W	
R093705/10W	E-Pro Recessed 1x5 cells 10W	206 x 54 x 47
R093705/20W	E-Pro Recessed 1x5 cells 20W	
R093710/20W	E-Pro Recessed 1x10 cells 20W	396 x 54 x 47
R093710/40W	E-Pro Recessed 1x10 cells 40W	
R093722/8W	E-Pro Recessed 2x2 cells 8W	93 x 93 x 47
R093722/16W	E-Pro Recessed 2x2 cells 16W	
R093733/18W	E-Pro Recessed 3x3 cells 18W	131 x 131 x 47
R093733/36W	E-Pro Recessed 3x3 cells 36W	

E-pro Surface Mounted



Pg.106

R093601	E-Pro Surface single cell 5W	49 x 49 x 83
R093622/8W	E-Pro Surface 2x2 cells 8W	86 x 86 x 88
R093622/16W	E-Pro Surface 2x2 cells 16W	
R093622/16W	E-Pro Surface 3x3 cells 18W	125 x 125 x 88
R093633/36W	E-Pro Surface 3x3 cells 36W	

R3



Pg.113

R095601/TW	R3 6W Tunable White 3000K-5000K Control Dim	
R095601/3K	R3 6W IP65 Fire Rated Mains Dim 3000K	ø85 x H63
R095601/4K	R3 6W IP65 Fire Rated Mains Dim 4000K	

Pinnacle



Pg.114

R097701

Pinnacle 6W 3000K 15° beam

ø68 x H64

Endor 12W



Pg.116

R0966A1B1C1E1	Endor 12W 15° Round Downlight - Titanium Reflector	
R0966A1B1C1E3	Endor 12W 15° Round Downlight - Matte Silver	ø75 x H112
R0966A1B1C1E2	Endor 12W 15° Round Downlight - Polished Chrome	
R0966A1B1C2E1	Endor 12W 15° Round Rimless Downlight - Titanium Reflector	
R0966A1B1C2E3	Endor 12W 15° Round Rimless Downlight - Matte Silver	ø75 x H112
R0966A1B1C2E2	Endor 12W 15° Round Rimless Downlight - Polished Chrome	
R0966A1B1C3F1	Endor 12W 15° Square Downlight - Titanium Reflector	
R0966A1B1C3F3	Endor 12W 15° Square Downlight - Matte Silver	75 x 75 x H112
R0966A1B1C3F2	Endor 12W 15° Square Downlight - Polished Chrome	
R0966A1B2C1E1	Endor 12W 38° Round Downlight - Titanium Reflector	
R0966A1B2C1E3	Endor 12W 38° Round Downlight - Matte Silver	ø75 x H112
R0966A1B2C1E2	Endor 12W 38° Round Downlight - Polished Chrome	
R0966A1B2C2E1	Endor 12W 38° Round Rimless Downlight - Titanium Reflector	
R0966A1B2C2E3	Endor 12W 38° Round Rimless Downlight - Matte Silver	ø75 x H112
R0966A1B2C2E2	Endor 12W 38° Round Rimless Downlight - Polished Chrome	
R0966A1B2C3F1	Endor 12W 38° Square Downlight - Titanium Reflector	
R0966A1B2C3F3	Endor 12W 38° Square Downlight - Matte Silver	75 x 75 x H112
R0966A1B2C3F2	Endor 12W 38° Square Downlight - Polished Chrome	
R0966A1B3C1E1	Endor 12W 55° Round Downlight - Titanium Reflector	
R0966A1B3C1E3	Endor 12W 55° Round Downlight - Matte Silver	ø75 x H112
R0966A1B3C1E2	Endor 12W 55° Round Downlight - Polished Chrome	
R0966A1B3C2E1	Endor 12W 55° Round Rimless Downlight - Titanium Reflector	
R0966A1B3C2E3	Endor 12W 55° Round Rimless Downlight - Matte Silver	ø75 x H112
R0966A1B3C2E2	Endor 12W 55° Round Rimless Downlight - Polished Chrome	
R0966A1B3C3F1	Endor 12W 55° Square Downlight - Titanium Reflector	
R0966A1B3C3F3	Endor 12W 55° Square Downlight - Matte Silver	75 x 75 x H112
R0966A1B3C3F2	Endor 12W 55° Square Downlight - Polished Chrome	

Product part code index


Endor IP65 12W



Pg.116

R0966A1BIC4	Endor IP65 12W 15° Round Downlight	ø88 x H118
R0966A1BIC5	Endor IP65 12W 15° Square Downlight	88 x 88 x H118
R0966A1B2C4	Endor IP65 12W 38° Round Downlight	ø88 x H118
R0966A1B2C5	Endor IP65 12W 38° Square Downlight	88 x 88 x H118
R0966A1B3C4	Endor IP65 12W 55° Round Downlight	ø88 x H1108
R0966A1B3C5	Endor IP65 12W 55° Square Downlight	88 x 88 x H118

Endor 12W Wallwasher



Pg. 116

R0966A1B1C1D1	Endor 12W 15° Round Wallwasher - Titanium Reflector	
R0966A1B1C1D3	Endor 12W 15° Round Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B1C1D2	Endor 12W 15° Round Wallwasher - Polished Chrome Reflector	
R0966A1B1C2D1	Endor 12W 15° Round Rimless Wallwasher - Titanium Reflector	
R0966A1B1C2D3	Endor 12W 15° Round Rimless Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B1C2D2	Endor 12W 15° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A1B2C1D1	Endor 12W 38° Round Wallwasher - Titanium Reflector	
R0966A1B2C1D3	Endor 12W 38° Round Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B2C1D2	Endor 12W 38° Round Wallwasher - Polished Chrome Reflector	
R0966A1B2C2D1	Endor 12W 38° Round Rimless Wallwasher - Titanium Reflector	
R0966A1B2C2D3	Endor 12W 38° Round Rimless Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B2C2D2	Endor 12W 38° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A1B3C1D1	Endor 12W 55° Round Wallwasher - Titanium Reflector	
R0966A1B3C1D3	Endor 12W 55° Round Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B3C1D2	Endor 12W 55° Round Wallwasher - Polished Chrome Reflector	
R0966A1B3C2D1	Endor 12W 55° Round Rimless Wallwasher - Titanium Reflector	
R0966A1B3C2D3	Endor 12W 55° Round Rimless Wallwasher - Matte Silver Reflector	ø75 x H112
R0966A1B3C2D2	Endor 12W 55° Round Rimless Wallwasher - Polished Chrome Reflector	

Endor 24W



Pg.116

R0966A2B4C6E4	Endor 24W 15° Round Downlight - Titanium Reflector	
R0966A2B4C6E6	Endor 24W 15° Round Downlight - Matte Silver	ø100 x H140
R0966A2B4C6E5	Endor 24W 15° Round Downlight - Polished Chrome	
R0966A2B4C7E4	Endor 24W 15° Round Rimless Downlight - Titanium Reflector	
R0966A2B4C7E6	Endor 24W 15° Round Rimless Downlight - Matte Silver	ø100 x H140
R0966A2B4C7E5	Endor 24W 15° Round Rimless Downlight - Polished Chrome	
R0966A2B4C8F4	Endor 24W 15° Square Downlight - Titanium Reflector	
R0966A2B4C8F6	Endor 24W 15° Square Downlight - Matte Silver	100 x 100 x H140
R0966A2B4C8F5	Endor 24W 15° Square Downlight - Polished Chrome	

Pg.116

R0966A2B5C6E4	Endor 24W 38° Round Downlight - Titanium Reflector	
R0966A2B5C6E6	Endor 24W 38° Round Downlight - Matte Silver	ø100 x H140
R0966A2B5C6E5	Endor 24W 38° Round Downlight - Polished Chrome	
R0966A2B5C7E4	Endor 24W 38° Round Rimless Downlight - Titanium Reflector	
R0966A2B5C7E6	Endor 24W 38° Round Rimless Downlight - Matte Silver	ø100 x H140
R0966A2B5C7E5	Endor 24W 38° Round Rimless Downlight - Polished Chrome	
R0966A2B5C8F4	Endor 24W 38° Square Downlight - Titanium Reflector	
R0966A2B5C8F6	Endor 24W 38° Square Downlight - Matte Silver	100 x 100 x H140
R0966A2B5C8F5	Endor 24W 38° Square Downlight - Polished Chrome	
R0966A2B6C6E4	Endor 24W 55° Round Downlight - Titanium Reflector	
R0966A2B6C6E6	Endor 24W 55° Round Downlight - Matte Silver	ø100 x H140
R0966A2B6C6E5	Endor 24W 55° Round Downlight - Polished Chrome	
R0966A2B6C7E4	Endor 24W 55° Round Rimless Downlight - Titanium Reflector	
R0966A2B6C7E6	Endor 24W 55° Round Rimless Downlight - Matte Silver	ø100 x H140
R0966A2B6C7E5	Endor 24W 55° Round Rimless Downlight - Polished Chrome	
R0966A2B6C8F4	Endor 24W 55° Square Downlight - Titanium Reflector	
R0966A2B6C8F5	Endor 24W 55° Square Downlight - Matte Silver	100 x 100 x H140
R0966A2B6C8F6	Endor 24W 55° Square Downlight - Polished Chrome	

Endor 24W Wallwasher

Pg. 116



R0966A2B4C6D4	Endor 24W 15° Round Wallwasher - Titanium Reflector	ø100 x H140
R0966A2B4C6D6	Endor 24W 15° Round Wallwasher - Matte Silver Reflector	
R0966A2B4C6D5	Endor 24W 15° Round Wallwasher - Polished Chrome Reflector	ø100 x H140
R0966A2B4C7D4	Endor 24W 15° Round Rimless Wallwasher - Titanium Reflector	
R0966A2B4C7D6	Endor 24W 15° Round Rimless Wallwasher - Matte Silver Reflector	ø100 x H140
R0966A2B4C7D5	Endor 24W 15° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A2B5C6D4	Endor 24W 38° Round Wallwasher - Titanium Reflector	ø100 x H140
R0966A2B5C6D6	Endor 24W 38° Round Wallwasher - Matte Silver Reflector	
R0966A2B5C6D5	Endor 24W 38° Round Wallwasher - Polished Chrome Reflector	ø100 x H140
R0966A2B5C7D4	Endor 24W 38° Round Rimless Wallwasher - Titanium Reflector	
R0966A2B5C7D6	Endor 24W 38° Round Rimless Wallwasher - Matte Silver Reflector	ø100 x H140
R0966A2B5C7D5	Endor 24W 38° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A2B6C6D4	Endor 24W 55° Round Wallwasher - Titanium Reflector	ø100 x H140
R0966A2B6C6D6	Endor 24W 55° Round Wallwasher - Matte Silver Reflector	
R0966A2B6C6D5	Endor 24W 55° Round Wallwasher - Polished Chrome Reflector	ø100 x H140
R0966A2B6C7D4	Endor 24W 55° Round Rimless Wallwasher - Titanium Reflector	
R0966A2B6C7D6	Endor 24W 55° Round Rimless Wallwasher - Matte Silver Reflector	ø100 x H140
R0966A2B6C7D5	Endor 24W 55° Round Rimless Wallwasher - Polished Chrome Reflector	

Product part code index

Endor 32W



Pg.116

R0966A3B7C9E7	Endor 32W 15° Round Downlight - Titanium Reflector	
R0966A3B7C9E9	Endor 32W 15° Round Downlight - Matte Silver	ø140 x H169
R0966A3B7C9E8	Endor 32W 15° Round Downlight - Polished Chrome	
R0966A3B7C10E7	Endor 32W 15° Round Rimless Downlight - Titanium Reflector	
R0966A3B7C10E9	Endor 32W 15° Round Rimless Downlight - Matte Silver	ø140 x H169
R0966A3B7C10E8	Endor 32W 15° Round Rimless Downlight - Polished Chrome	
R0966A3B7C11F7	Endor 32W 15° Square Downlight - Titanium Reflector	
R0966A3B7C11F9	Endor 32W 15° Square Downlight - Matte Silver	140 x 140 x H169
R0966A3B7C11F8	Endor 32W 15° Square Downlight - Polished Chrome	
R0966A3B8C9E7	Endor 32W 38° Round Downlight - Titanium Reflector	
R0966A3B8C9E9	Endor 32W 38° Round Downlight - Matte Silver	ø140 x H169
R0966A3B8C9E8	Endor 32W 38° Round Downlight - Polished Chrome	
R0966A3B8C10E7	Endor 32W 38° Round Rimless Downlight - Titanium Reflector	
R0966A3B8C10E9	Endor 32W 38° Round Rimless Downlight - Matte Silver	ø140 x H169
R0966A3B8C10E8	Endor 32W 38° Round Rimless Downlight - Polished Chrome	
R0966A3B8C11F7	Endor 32W 38° Square Downlight - Titanium Reflector	
R0966A3B8C11F9	Endor 32W 38° Square Downlight - Matte Silver	140 x 140 x H169
R0966A3B8C11F8	Endor 32W 38° Square Downlight - Polished Chrome	
R0966A3B9C9E7	Endor 32W 55° Round Downlight - Titanium Reflector	
R0966A3B9C9E9	Endor 32W 55° Round Downlight - Matte Silver	ø140 x H169
R0966A3B9C9E8	Endor 32W 55° Round Downlight - Polished Chrome	
R0966A3B9C10E7	Endor 32W 55° Round Rimless Downlight - Titanium Reflector	
R0966A3B9C10E9	Endor 32W 55° Round Rimless Downlight - Matte Silver	ø140 x H169
R0966A3B9C10E8	Endor 32W 55° Round Rimless Downlight - Polished Chrome	
R0966A3B9C11F7	Endor 32W 55° Square Downlight - Titanium Reflector	
R0966A3B9C11F9	Endor 32W 55° Square Downlight - Matte Silver	140 x 140 x H169
R0966A3B9C11F8	Endor 32W 55° Square Downlight - Polished Chrome	

Endor 32W Wallwasher



Pg. 116

R0966A3B7C9D7	Endor 32W 15° Round Wallwasher - Titanium Reflector	
R0966A3B7C9D9	Endor 32W 15° Round Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B7C9D8	Endor 32W 15° Round Wallwasher - Polished Chrome Reflector	
R0966A3B7C10D7	Endor 32W 15° Round Rimless Wallwasher - Titanium Reflector	
R0966A3B7C10D9	Endor 32W 15° Round Rimless Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B7C10D8	Endor 32W 15° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A3B8C9D7	Endor 32W 38° Round Wallwasher - Titanium Reflector	
R0966A3B8C9D9	Endor 32W 38° Round Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B8C9D8	Endor 32W 38° Round Wallwasher - Polished Chrome Reflector	

Pg.116

R0966A3B8C10D7	Endor 32W 38° Round Rimless Wallwasher - Titanium Reflector	
R0966A3B8C10D9	Endor 32W 38° Round Rimless Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B8C10D8	Endor 32W 38° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A3B9C9D7	Endor 32W 55° Round Wallwasher - Titanium Reflector	
R0966A3B9C9D9	Endor 32W 55° Round Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B9C9D8	Endor 32W 55° Round Wallwasher - Polished Chrome Reflector	
R0966A3B9C10D7	Endor 32W 55° Round Rimless Wallwasher - Titanium Reflector	
R0966A3B9C10D9	Endor 32W 55° Round Rimless Wallwasher - Matte Silver Reflector	ø140 x H169mm
R0966A3B9C10D8	Endor 32W 55° Round Rimless Wallwasher - Polished Chrome Reflector	

Endor 42W

Pg. 116



R0966A4B10C12E10	Endor 42W 15° Round Downlight - Titanium Reflector	
R0966A4B10C12E12	Endor 42W 15° Round Downlight - Matte Silver	ø165 x H184
R0966A4B10C12E11	Endor 42W 15° Round Downlight - Polished Chrome	
R0966A4B10C13E10	Endor 42W 15° Round Rimless Downlight - Titanium Reflector	
R0966A4B10C13E12	Endor 42W 15° Round Rimless Downlight - Matte Silver	ø165 x H184
R0966A4B10C13E11	Endor 42W 15° Round Rimless Downlight - Polished Chrome	
R0966A4B10C14F10	Endor 42W 15° Square Downlight - Titanium Reflector	
R0966A4B10C14F12	Endor 42W 15° Square Downlight - Matte Silver	165 x165 x H184W
R0966A4B10C14F11	Endor 42W 15° Square Downlight - Polished Chrome	
R0966A4B11C12E10	Endor 42W 38° Round Downlight - Titanium Reflector	
R0966A4B11C12E12	Endor 42W 38° Round Downlight - Matte Silver	ø165 x H184
R0966A4B11C12E11	Endor 42W 38° Round Downlight - Polished Chrome	
R0966A4B11C13E10	Endor 42W 38° Round Rimless Downlight - Titanium Reflector	
R0966A4B11C13E12	Endor 42W 38° Round Rimless Downlight - Matte Silver	ø165 x H184
R0966A4B11C13E11	Endor 42W 38° Round Rimless Downlight - Polished Chrome	
R0966A4B11C14F10	Endor 42W 38° Square Downlight - Titanium Reflector	
R0966A4B11C14F12	Endor 42W 38° Square Downlight - Matte Silver	165 x165 x H184
R0966A4B11C14F11	Endor 42W 38° Square Downlight - Polished Chrome	
R0966A4B12C12E10	Endor 42W 55° Round Downlight - Titanium Reflector	
R0966A4B12C12E12	Endor 42W 55° Round Downlight - Matte Silver	ø165 x H184
R0966A4B12C12E11	Endor 42W 55° Round Downlight - Polished Chrome	
R0966A4B12C13E10	Endor 42W 55° Round Rimless Downlight - Titanium Reflector	
R0966A4B12C13E12	Endor 42W 55° Round Rimless Downlight - Matte Silver	ø165 x H184
R0966A4B12C13E11	Endor 42W 55° Round Rimless Downlight - Polished Chrome	
R0966A4B12C14F10	Endor 42W 55° Square Downlight - Titanium Reflector	
R0966A4B12C14F12	Endor 42W 55° Square Downlight - Matte Silver	165 x165 x H184
R0966A4B12C14F11	Endor 42W 55° Square Downlight - Polished Chrome	

Product part code index


Endor 42W Wallwasher



Pg.116

R0966A4B10C12D10	Endor 42W 15° Round Wallwasher - Titanium Reflector	
R0966A4B10C12D12	Endor 42W 15° Round Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B10C12D11	Endor 42W 15° Round Wallwasher - Polished Chrome Reflector	
R0966A4B10C13D10	Endor 42W 15° Round Rimless Wallwasher - Titanium Reflector	
R0966A4B10C13D12	Endor 42W 15° Round Rimless Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B10C13D11	Endor 42W 15° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A4B11C12D10	Endor 42W 38° Round Wallwasher - Titanium Reflector	
R0966A4B11C12D12	Endor 42W 38° Round Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B11C12D11	Endor 42W 38° Round Wallwasher - Polished Chrome Reflector	
R0966A4B11C13D10	Endor 42W 38° Round Rimless Wallwasher - Titanium Reflector	
R0966A4B11C13D12	Endor 42W 38° Round Rimless Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B11C13D11	Endor 42W 38° Round Rimless Wallwasher - Polished Chrome Reflector	
R0966A4B12C12D10	Endor 42W 55° Round Wallwasher - Titanium Reflector	
R0966A4B12C12D12	Endor 42W 55° Round Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B12C12D11	Endor 42W 55° Round Wallwasher - Polished Chrome Reflector	
R0966A4B12C13D10	Endor 42W 55° Round Rimless Wallwasher - Titanium Reflector	
R0966A4B12C13D12	Endor 42W 55° Round Rimless Wallwasher - Matte Silver Reflector	ø165 x H184
R0966A4B12C13D11	Endor 42W 55° Round Rimless Wallwasher - Polished Chrome Reflector	

Sirius



Pg. 122

R093401/3K/24W	Sirius 24W 3000K	
R093401/4K/24W	Sirius 24W 4000K	
R093401/3K/42W	Sirius 42W 3000K	ø230 x H125mm
R093401/4K/42W	Sirius 42W 4000K	

Pulsar Lite



Pg. 132

R096401	Pulsar Lite Recessed 12W 3000K	ø62 x H215
R096402	Pulsar Lite Recessed 12W 4000K	
R096501	Pulsar Lite Surface Mounted 12W 3000K	ø62 x H215
R096502	Pulsar Lite Surface Mounted 12W 4000K	

Ultra-Slim R - Mains Dim



Pg.123

R091501	Ultra-Slim R 8W 3000K	
R091522	Ultra-Slim R 8W 4000K	ø110 x H24
R091502	Ultra-Slim R 8W 6000K	
R091503	Ultra-Slim R 11W 3000K	
R091524	Ultra-Slim R 11W 4000K	ø140 x H25
R091504	Ultra-Slim R 11W 6000K	
R091505	Ultra-Slim R 15W 3000K	
R091526	Ultra-Slim R 15W 4000K	ø160 x H26
R091506	Ultra-Slim R 15W 6000K	
R091507	Ultra-Slim R 18W 3000K	
R091528	Ultra-Slim R 18W 4000K	ø180 x H27
R091508	Ultra-Slim R 18W 6000K	
R091509	Ultra-Slim R 23W 3000K	
R091530	Ultra-Slim R 23W 4000K	ø230 x H28

Ultra-Slim R Non Dimmable Series



Pg.123

R093201	Ultra-Slim R 8W 3000K	
R093202	Ultra-Slim R 8W 4000K	ø110 x H24
R093222	Ultra-Slim R 8W 6000K	
R093203	Ultra-Slim R 11W 3000K	
R093204	Ultra-Slim R 11W 4000K	ø140 x H25
R093224	Ultra-Slim R 11W 6000K	
R093205	Ultra-Slim R 15W 3000K	
R093206	Ultra-Slim R 15W 4000K	ø160 x H26
R093226	Ultra-Slim R 15W 6000K	
R093207	Ultra-Slim R 18W 3000K	
R093208	Ultra-Slim R 18W 4000K	ø180 x H27
R093228	Ultra-Slim R 18W 6000K	
R093209	Ultra-Slim R 23W 3000K	
R093210	Ultra-Slim R 23W 4000K	ø230 x H28

Product part code index

Carina



Pg.124

R093301	Carina 12W 3000K	ø145 x H64
R093302	Carina 12W 4000K	
R093303	Carina 15W 3000K	ø160 x H74
R093304	Carina 15W 4000K	
R093305	Carina 18W 3000K	ø190 x H85
R093306	Carina 18W 4000K	
R093307	Carina 23W 3000K	ø230 x H90
R093308	Carina 23W 4000K	

Protium



Pg. 126

R093001/3K	Protium 22W 3000K	H107 x L140 x W140
R093001/4K	Protium 22W 4000K	
R093002/3K	Protium 44W 3000K	H107 x L270 x W140
R093002/4K	Protium 44W 4000K	
R093003/3K	Protium 66W 3000K	H107 x L375 x W140
R093003 /4K	Protium 66W 4000K	

Protium Max



Pg. 127

R093011/3K/25W	Protium Max 25W 3000K	H133 x L175 x W175
R093011/4K/25W	Protium Max 25W 4000K	
R093011/3K/40W	Protium Max 40W 3000K	
R093011/4K/40W	Protium Max 40W 4000K	
R093012/3K/50W	Protium Max 50W 3000K	H133 x L330 x W175
R093012/4K/50W	Protium Max 50W 4000K	
R093012/3K/80W	Protium Max 80W 3000K	
R093012/4K/80W	Protium Max 80W 4000K	
R093013/3K/75W	Protium Max 75W 3000K	H133 x L475 x W175
R093013/4K/75W	Protium Max 75W 4000K	
R093013/3K/120W	Protium Max 120W 3000K	
R093013/4K/120W	Protium Max 120W 4000K	

Saturn



Pg.130

R091801/105	Saturn 12W 3000K	ø105 x H82mm
R091801/105/4K*	Saturn 12W 4000K	
R091802/105	Saturn 12W 5000K	ø158 x H130mm
R091803/158	Saturn 24W 3000K	
R091803/158/4K*	Saturn 24W 4000K	
R091804/158	Saturn 24W 5000K	ø188 x H159mm
R091805/188	Saturn 40W 3000K	
R091805/188/4K*	Saturn 40W 4000K	
R091806/188	Saturn 40W 5000K	

Modus



Pg.128

R096920/WT/3K/14W	Modus Surface 14W White Finish 3000K	ø135 x H170
R096920/WT/4K/14W	Modus Surface 14W White Finish 4000K	
R096920/BK/3K/14W	Modus Surface 14W Black Finish 3000K	
R096920/BK/4K/14W	Modus Surface 14W Black Finish 4000K	
R096920/WT/3K/28W	Modus Surface 28W White Finish 3000K	
R096920/WT/4K/28W	Modus Surface 28W White Finish 4000K	
R096920/BK/3K/28W	Modus Surface 28W Black Finish 3000K	
R096920/BK/4K/28W	Modus Surface 28W Black Finish 4000K	

Modus Max



Pg.131

R096950/3K/70W	Modus Max 70W 3000K	ø260 x H275mm
R096950/4K/70W	Modus Max 70W 4000K	
R096950/3K/100W	Modus Max 100W 3000K	
R096950/4K/100W	Modus Max 100W 4000K	
R096950/3K/150W	Modus Max 150W 3000K	
R096950/4K/150W	Modus Max 150W 4000K	

Core



Pg.112

R098900	Core 6W 3000K 4000K switchable Mains Dim with white bezel	ø84 x H53
---------	---	-----------

Product part code index

Centorio				
	Pg.125	R098802	Centorio 12W Fire Rated Tunable White 3000K-5000K	ø110 x H37



Product part code index

E-pro track

Dimensions in mm



Pg.146

R111722/8W	E-Pro Track 2x2 cells 8W	111x93x47
R111722/16W	E-Pro Track 2x2 cells 16W	
R111722/28W	E-Pro Track 2x2 cells 28W	
R111733/18W	E-Pro Track 3x3 cells 18W	149x171x47
R111733/36W	E-Pro Track 3x3 cells 36W	
R111733/42W	E-Pro Track 3x3 cells 42W	

Zenith



Pg. 149

R111401/27K	Zenith Switchable 12W-42W 2700K	ø90 x 158 x 150
R111401/3K	Zenith Switchable 12W-42W 3000K	
R111401/4K	Zenith Switchable 12W-42W 4000K	

Pulsar Lite Track



Pg.150

R096701	Pulsar Lite Track 24° 3000K	ø62 x H228
R096702	Pulsar Lite Track 24° 4000K	

Pulsar Pendant Track



Pg.149

R111721	Pulsar Pendant Track 10W	ø65 x H256 - Flex 1500 max
---------	--------------------------	----------------------------

Egress Track Exit Sign

Dimensions in mm



Pg.152

R111222

Egress Track Exit Sign 2.7Wgends

111x93x47

Draco Track Emergency

Pg.153

R111221

Draco Track Emergency 3W

267x32x350

3 Circuit Track System

Pg.154

XTS111 / XTS112 / XTS113	Track Live End Silver / Black / White
XTS141 / XTS142 / XTS143	Track Connector with Middle Feed Silver / Black / White
XTS211 / XTS212 / XTS213	Track Straight Connector Silver / Black / White
XTS231 / XTS232 / XTS233	Track Flexible Corner Silver / Black / White
XTS241 / XTS242 / XTS243	Track Adjustable Corner Silver / Black / White
XTS341 / XTS342 / XTS343	Track L-Connector Silver / Black / White
XTS351 / XTS352 / XTS353	Track L-Connector Mirror Silver / Black / White
XTS361 / XTS362 / XTS363	Track T-Connector Mirror Silver / Black / White
XTS371 / XTS372 / XTS373	Track T-Connector Silver / Black / White
XTS381 / XTS382 / XTS383	Track X-Connector Silver / Black / White
XTS391 / XTS392 / XTS393	Track T-Connector Silver / Black / White
XTS401 / XTS402 / XTS403	Track T-Connector Mirror Silver / Black / White
XTS41001 / XTS41002 / XTS41003	Surface/Suspension Track 1M Silver / Black / White
XTS411 / XTS412 / XTS413	Track Dead End Cap Silver / Black / White
XTS42001 / XTS42002 / XTS42003	Surface/Suspension Track 2M Silver / Black / White
XTSF101 / XTSF102 / XTSF103	Track Recessed Feed Cover Plate Silver / Black / White
XTSF301 / XTSF302 / XTSF303	Track Recessed Connector Cover Plate Silver / Black / White
XTSF41001 / XTSF41002 / XTSF41003	Recessed Track 1M Silver / Black / White

Product part code index

3 Circuit Track System

Dimensions in mm

XTSF4200/XTSF42002/XTSF42003	Recessed Track 2M Silver / Black / White
XTSV12	Track Bending Tool
SKBI21 / SKBI22 / SKBI23	Track Surface Mount Clamp Silver / Black / White
SKBIIT1 / SKBIIT2 / SKBIIT3	Track Suspended Ceiling Clamp Silver / Black / White
SPW12SK-2/5M / SPW12SK-3/5M	Track 5m Track Clamp Wire Set Black / White
PRO-RI05-001	Fixing Bracket for Recessed Track

Zodiac Direct 48V Track



Pg.159

RII2-01	Zodiac 48V Direct Track 1m	1000x26x53
RII2-02	Zodiac 48V Direct Track 2m	2000x26x53
RII2-03	Zodiac 48V Direct Horizontal 'L' Connector Shape	
RII2-04	Zodiac 48V Direct End Caps (2 Pcs)	
RII2-05 Kit (1 Pc)	Zodiac 48V Recessed Installation Kit (1 Pc)	

Zodiac Direct/Indirect 48V Track



Pg.159

RII2-11	Zodiac 48V Direct/Indirect Track 1m	1000x26x78
RII2-12	Zodiac 48V Direct/Indirect Track 2m	2000x26x78
RII2-13	Zodiac 48V Direct/Indirect Horizontal 'L' Connector Shape	
RII2-14	Zodiac 48V Direct/Indirect End Caps (2 Pcs)	

Zodiac Round Direct 48V Track



Pg.159

RII2-21	Zodiac 48V Round Track 1m	2000x26x78
RII2-22	Zodiac 48V Round Track 2m	2000x26x53
RII2-23	Zodiac 48V Round Horizontal 'L' Connector Shape	
RII2-24	Zodiac 48V Round End Caps (2 Pcs)	

Zodiac 48V Bluetooth Speaker

Dimensions in mm



Pg. 163

R112011	Zodiac 48V Bluetooth Speaker (Master)	ø70 x 110
R112012	Zodiac 48V Bluetooth Speaker (Slave)	

Zodiac 48V Track Spot



Pg. 162

R112045/3K	Zodiac 48V Track Spot 10W 3000K	ø33 x 143mm
R112045/4K	Zodiac 48V Track Spot 10W 4000K	
R112046/3K	Zodiac 48V Track Spot 18W 3000K	ø54 x 160mm
R112046/4K	Zodiac 48V Track Spot 18W 4000K	
R112047/3K	Zodiac 48V Track Spot 24W 3000K	ø65 x 189mm
R112047/4K	Zodiac 48V Track Spot 24W 4000K	

Zodiac 48V Zoomable Track Spot



Pg. 162

R112042/3K	Zodiac 48V Track Zoomable Spot 9W 3000K	ø60 x 195
R112042/4K	Zodiac 48V Track Zoomable Spot 9W 4000K	

Zodiac 48V Up Track Spot



Pg. 162

R112044/3K	Zodiac 48V Track Up Spot 5W 3000K	ø30 x 125
R112044/4K	Zodiac 48V Track Up Spot 5 YR 5W 4000K	

Product part code index

Zodiac 48V Track Linear			Dimensions in mm
	Pg. 161	R112021/3K	Zodiac 48V Track Linear 7W 300mm 3000K
		R112021/4K	Zodiac 48V Track Linear 7W 300mm 4000K
		R112022/3K	Zodiac 48V Track Linear 15W 600mm 3000K
		R112022/4K	Zodiac 48V Track Linear 15W 600mm 4000K

Zodiac 48V Track Linear Wallwash			
	Pg. 161	R112023/3K	Zodiac 48V Track Linear Wallwash 12W 3000K
		R112023/4K	Zodiac 48V Track Linear Wallwash 12W 4000K

Zodiac 48V Up Track Linear			
	Pg. 161	R112028/3K	Zodiac 48V Track Linear Up 5W 300mm 3000K
		R112028/4K	Zodiac 48V Track Linear Up 5W 300mm 4000K

Zodiac 48V Track Recessed Aperture			
	Pg. 161	R112024/3K	Zodiac 48V Track Recessed Aperture 6W 3000K
		R112024/4K	Zodiac 48V Track Recessed Aperture 6W 4000K
		R112026/3K	Zodiac 48V Track Adjustable Recessed Aperture 6W 3000K
		R112026/4K	Zodiac 48V Track Adjustable Recessed Aperture 6W 4000K

Zodiac 48V Track Cylindrical Pendant

Dimensions in mm



Pg. 169

R112033/3K	Zodiac 48V Track Black Cylindrical Pendant 7W 3000K	ø38 x 300
R112033/4K	Zodiac 48V Track Black Cylindrical Pendant 7W 4000K	
R112034/3K	Zodiac 48V Track Brass Cylindrical Pendant 7W 3000K	
R112034/4K	Zodiac 48V Track Brass Cylindrical Pendant 7W 4000K	

Zodiac 48V Track Drop Pendant



Pg. 169

R112032/3K	Zodiac 48V Track Drop Pendant 7W 3000K	ø100 x 1002
R112032/4K	Zodiac 48V Track Drop Pendant 7W 4000K	

Zodiac 48V Beam



Pg. 165

R112004/3K	Zodiac 48V Track Beam 12W 3000K	400 x 28 x 79
------------	---------------------------------	---------------

Zodiac 48V Globe



Pg. 166

R112031/3K	Zodiac 48V Track Globe Pendant 5W 3000K	ø100 x 916
R112002/3K	Zodiac 48V Track Globe 5W 3000K	ø100 x 130

Product part code index

Zodiac 48V Ring

Dimensions in mm




Pg. 166

R112005/3K	Zodiac 48V Track Ring Pendant 5W 3000K	ø80 x 1200
R112005/4K	Zodiac 48V Track Ring Pendant 5W 4000K	
R112006/3K	Zodiac 48V Track Ring 5W 3000K	ø80 x 89
R112006/4K	Zodiac 48V Track Ring 5W 4000K	

Product part code index

Core Plus



Pg.180

R101281	Core Plus Panel 600x600mm 32W 4000K	600x600
R101281/24W	Core Plus Panel 600x600mm 24W 4000K	
R101281/45W	Core Plus Panel 600x600mm 45W 4000K	
R101281/5K	Core Plus Panel 600x600mm 32W 5000K	
R101281/5K/24W	Core Plus Panel 600x600mm 24W 5000K	
R101281/5K/45W	Core Plus Panel 600x600mm 45W 5000K	

Core UGR



Pg.181

R101282	Core UGR Panel 600x600mm 32W 4000K	600x600
R101282/24W	Core UGR Panel 600x600mm 24W 4000K	
R101282/45W	Core UGR Panel 1200x300 45W 4000K	
R101283	Core UGR Panel 1200x300 32W 4000K	1200x300
R101284	Core UGR Panel 1200x600 64W 4000K	1200x600

Aquavance IP66



Pg.182

R101103/4K	Aquavance Panel 600x600mm 36W 4000K	600x600
R101101/4K	Aquavance Panel 600x600mm 48W 4000K	
R101203	Aquavance Panel 1200x300mm 36W 5000K	1200x300
R101201	Aquavance Panel 1200x300mm 48W 5000K	1200x300
R101301	Aquavance Panel 1200x600mm 72W 5000K	1200x600

Pure 5X5 panel



Pg.184

R101191/4K	Pure Panel 500x500mm 30W 4000K	500x500
------------	--------------------------------	---------

O² opal diffuser



Pg.186

R880101/24W	O ² Opal 24W	595 x 595 x36
R880101/32W	O ² Opal 32W	
R89010101/36W	O ² Performance Opal 36W	
R89010101/48W	O ² Performance Opal 48W	

O² LG7 Diffuser



Pg.186

R880202/3K/24W	O ² LG7 24W	595 x 595 x36
R880202/4K/32W	O ² LG7 32W	
R89020202/36W	O ² Performance LG7 36W	
R89020202/48W	O ² Performance LG7 48W	

O² Recessed aperture diffuser



Pg.186

R880303/24W	O ² Recessed Aperture 24W	595 x 595 x36
R880303/32W	O ² Recessed Aperture 32W	
R89030303/36W	O ² Performance Recessed Aperture 36W	
R89030303/48W	O ² Performance Recessed Aperture 48W	

O² Wallwash diffuser



Pg. 186

R880404/24W	O ² Wallwash 24W	595 x 595 x36
R880404/32W	O ² Wallwash 32W	
R89040404/36W	O ² Performance Wallwash 36W	
R89040404/48W	O ² Performance Wallwash 48W	

Product part code index

O² Black louvre diffuser



Pg.186

R880505/24W	O² Black Louvre 24W	595 x 595 x36
R880505/32W	O² Black Louvre 32W	
R89050505/36W	O² Performance Black Louvre 36W	
R89050505/48W	O² Performance Black Louvre 48W	

O² Mirror louvre diffuser



Pg.186

R880606/24W	O² Mirror Louvre 24W	595 x 595 x36
R880606/32W	O² Mirror Louvre 32W	
R89060606/36W	O² Performance Mirror Louvre 36W	
R89060606/48W	O² Performance Mirror Louvre 48W	

O² White louvre diffuser



Pg.186

R880707/24W	O² White Louvre 24W	595 x 595 x36
R880707/32W	O² White Louvre 32W	
R89070707/36W	O² Performance White Louvre 36W	
R89070707/48W	O² Performance White Louvre 48W	


CTC Panel



Pg.192

R101107	CTC Panel 600x600mm 36W 2500K-6500K Dimmable	600x600x12.5
---------	--	--------------

RGBW Panel




Pg.193

R101106/RGBW

RGBW Panel 600x600mm 36W Dimmable

600x600x12.5

Sky Panels



Pg.194

R101291

600x600 Sky Panel

R101294

Set of 4 600x600 Sky Panels

R101296

Set of 6 600x600 Sky Panels

R101299

Set of 9 600x600 Sky Panels

R101291/123

1200x300 Sky Panel

R101291/126

1200x600 Sky Panel

Libra



Pg.185

R172201

Libra Switchable Wattage and Colour Temperature

595 x 595 x 47

Product part code index

Beacon		Dimensions in mm	
	Pg. 208	R301014/3K/25W	Beacon Dome Bollard 25W 3000K
		R301024/3K/25W	Beacon Flat Top Bollard 25W 3000K
		R301034/3K/25W	Beacon Louvre Bollard 25W 3000K
		R301014/4K/25W	Beacon Dome Bollard 25W 4000K
		R301024/4K/25W	Beacon Flat Bollard 25W 4000K
		R301034/4K/25W	Beacon Louvre Bollard 25W 4000K
		ø168 x H1000	

Porcini		Dimensions in mm	
	Pg. 210	R301050/P500	Porcini Bollard 500mm 25W Switchable 3000K/4000K
		R301050/P1000	Porcini Bollard 1000mm 25W Switchable 3000K/4000K
		ø168 x H500	
		ø168 x H1000	

Silbar		Dimensions in mm	
	Pg. 211	R301040/3K/P800	Silbar Bollard 800mm 15W 3000K
		R301040/3K/P1000	Silbar Bollard 1000mm 15W 3000K
		ø118 x H800	
		ø118 x H1000	

Hydra		Dimensions in mm	
	Pg. 212	R301500/50W	Hydra Exterior Floodlight 50W
		R301500/100W	Hydra Exterior Floodlight 100W
		R301500/150W	Hydra Exterior Floodlight 150W
		R301500/200W	Hydra Exterior Floodlight 200W
		237 x 200 x 39	
		321 x 282 x 41	
		333 x 420 x 51	
		385 x 470 x 51	

Flosse

Dimensions in mm



Pg. 213

R301301/3K/13W	Flosse Wall Pack 13W 3000K
R301301/4K/13W	Flosse Wall Pack 13W 4000K
R301301/3K/18W	Flosse Wall Pack 18W 3000K
R301301/4K/18W	Flosse Wall Pack 18W 4000K
R301301/3K/28W	Flosse Wall Pack 28W 3000K
301301/4K/28W	Flosse Wall Pack 28W 4000K

313 x 265 x 165

Iris bulkhead

Pg. 216

R181701/BK/18W/OP	Iris 18W 4000K Black Finish Open
R181701/BK/22W/OP	Iris 22W 4000K Black Finish Open
R181701/BK/18W/EY	Iris 18W 4000K Black Finish Eyelid
R181701/BK/22W/EY	Iris 22W 4000K Black Finish Eyelid
R181701/GY/18W/OP	Iris 18W 4000K Grey Finish Open
R181701/GY/22W/OP	Iris 22W 4000K Grey Finish Open
R181701/GY/18W/EY	Iris 18W 4000K Grey Finish Eyelid
R181701/GY/22W/EY	Iris 22W 4000K Grey Finish Eyelid

ø360 x H94

Alphard Round Bulkhead

Pg. 218

R181101	Alphard Bulkhead 24W 5000K Standard
R181101/4K	Alphard Bulkhead 24W 4000K Standard
R181101/E	Alphard Bulkhead 24W 5000K Emergency
R181101/4K/E	Alphard Bulkhead 24W 4000K Emergency
R181101/MW	Alphard Bulkhead 24W 5000K Microwave Sensor
R181101/4K/MW	Alphard Bulkhead 24W 4000K Microwave Sensor
R181101/MW/E	Alphard Bulkhead 24W 5000K Emergency & Microwave Sensor
R181101/4K/MW/E	Alphard Bulkhead 24W 4000K Emergency & Microwave Sensor

ø350 x D90

Victus

Pg. 221

R181801	Victus Bulkhead 14W 4000K Standard
R181801/E	Victus Bulkhead 14W 4000K Emergency
R181801/MW	Victus Bulkhead 14W 4000K Microwave Sensor
R181801/MW/E	Victus Bulkhead 14W 4000K Emergency & Microwave Sensor

ø330 x H100

Product part code index

Alphard Square Bulkhead

Dimensions in mm



Pg. 220

R181301/4K	Alphard Square Bulkhead 24W 4000K Standard	L300 x H300 x D90
R181301/4K/E	Alphard Square Bulkhead 24W 4000K Emergency	
R181301/4K/MW	Alphard Square Bulkhead 24W 4000K Microwave Sensor	
R181301/4K/MW/E	Alphard Square Bulkhead 24W 4000K Emergency & Microwave Sensor	

Thanos



Pg. 224

R141400/70W	Thanos 70W 4000K 120° beam 0-10V dim	L600 x W345 x H56
R141400/100W	Thanos 100W 4000K 120° beam 0-10V dim	
R141400/150W	Thanos 150W 4000K 120° beam 0-10V dim	
R141400/200W	Thanos 200W 4000K 120° beam 0-10V dim	L1200 x W345 x H56
R141400/320W	Thanos 320W 4000K 120° beam 0-10V dim	

Canopus



Pg. 225

R123101	Canopus 100W 5000K	L245 x W320 x H270
R123102	Canopus 150W 5000K	L365 x W320 x H270
R123103	Canopus 200W 5000K	L485 x W320 x H270

Titan



Pg. 226

R151006	Titan 0.6m Switchable 12W/15W/18W/20W in 4000K	L660 x H75 x W116
R151012	Titan 1.2m Switchable 24W/30W/37W/40W in 4000K	L1268 x H75 x W116
R151015	Titan 1.5m Switchable 35W/46W/52W/60W in 4000K	L1567 x H75 x W116
R151018	Titan 1.8m Switchable 48W/54W/70W/80W in 4000K	L1867 x H75 x W116

Orion

Dimensions in mm



Pg. 228

R280101/4K	Orion Batten 1.2m 25W 4000K	L1170 x W60 x H71
R280102/4K	Orion Batten 1.2m 45W 4000K	
R280101	Orion Batten 1.2m 25W 5000K	
R280201/4K	Orion Batten 1.5m 35W 4000K	L1470 x W60 x H71
R280202/4K	Orion Batten 1.5m 60W 4000K	
R280301/4K	Orion Batten 1.8m 45W 4000K	L1734 x W60 x H71
R280302/4K	Orion Batten 1.8m 70W 4000K	
R280302	Orion Batten 1.8m 70W 5000K	

Academy

Pg. 229

R250012/20W	Academy 1.2m 20W 4000K	L1178 x W205 x H87
R250012/40W	Academy 1.2m 40W 4000K	
R250015/30W	Academy 1.5m 30W 4000K	L1478 x W205 x H87
R250015/60W	Academy 1.5m 60W 4000K	
R250018/40W	Academy 1.8m 40W 4000K	L1778 x W205 x H87
R250018/68W	Academy 1.8m 68W 4000K	

Soar II

Pg. 232

R221560/ST/WT	Soar 2 Self test Round Surface Emergency Light in White 2W	155 x 155 x 46
R221561/ST/WT	Soar 2 Self test Square Surface Emergency Light in White 2W	
R221560/MT/WT	Soar 2 Manual test Round Surface Emergency Light in White 2W	
R221560/MT/BK	Soar 2 Manual test Round Surface Emergency Light in Black 2W	
R221561/MT/WT	Soar 2 Manual test Square Surface Emergency Light in White 2W	
R221561/MT/BK	Soar 2 Manual test Square Surface Emergency Light in Black 2W	

Vanguard III

Pg. 233

R221503/ALL	Vanguard 3.5W 6000K Non-Maintained	Ø70 x H49
-------------	------------------------------------	-----------

Product part code index

<

Icons

Other symbols



Circular economy

Controls & dimming symbols



/DH
Mains dimming



/DD
DALI dimming



/DC
0-10V dimming



/DSI
DSI dimming



/DMX
DMX controls




/CC
CASAMBI controls




/E
Emergency options


Mounting Options Symbols




Ceiling mounted
Long luminaire




Ceiling mounted
Small luminaire




Besa boxes mounted




Grid ceiling mounted




Recessed mounted
Long luminaire




Recessed mounted
Small luminaire




Suspended mounted
With up light




Suspended mounted
Long luminaire




Suspended mounted
Narrow luminaire




Suspended mounted
Small luminaire




Pendant mounted
Small luminaire with ceiling rose




Pendant mounted
Slim luminaire with ceiling rose




Pendant mounted
Narrow luminaire with ceiling rose




Pendant mounted
Narrow luminaire with ceiling rose




Solid rod mounted



Track mounted
Long luminaire




Track mounted
Small luminaire



Wall mounted
Outward lighting




Wall mounted
Downward lighting



Wall mounted
Recessed



Wall mounted
Round luminaire



Floor mounted
Outdoor

A special thank you

Thank you for exploring RICOMAN's new catalogue. We extend our heartfelt gratitude to our valued clients for their trust and support, and to all partners involved in our projects. A special thank you to our dedicated team, whose hard work and commitment have made this catalogue possible.

**YOUR LIGHTING,
OUR PASSION**

RICOMAN®

520 Metroplex, Broadway, M50 2UE, Manchester, UK
0161-451-5923 sales@ricoman.com
www.ricoman.com

Art direction
RICOMAN Marketing

Graphic design
RICOMAN Marketing

Illustrations
Patricia Duarte

© RICOMAN Ltd 2024
Published by RICOMAN Ltd.

All rights reserved.
Reproduction in whole or in part of this publication without
written permission is strictly prohibited. RICOMAN Ltd cannot
be responsible for unsolicited material. Models and technical
specifications are subject to modification and enhancements.



RICOCONNY[®]