


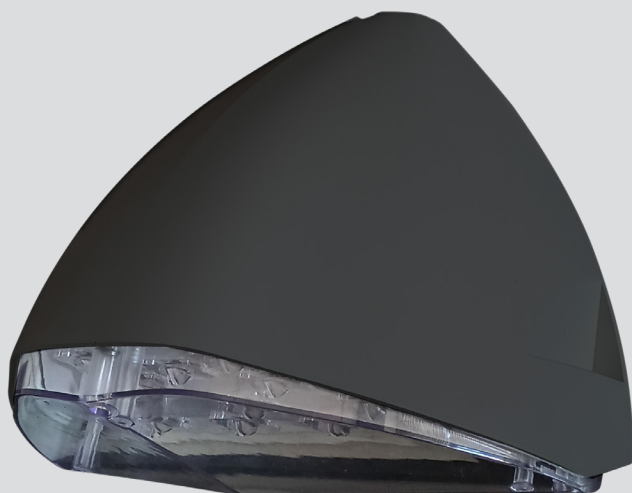

5 YR  
WARRANTY


IP65

IK10

125  
LM/W

## Overview

Exterior wall pack IP65 and IK10 rated, in three different finish options. Flosse is available in three outputs delivering up to 3500 lumens. With a modern and minimalist design, screw-less from front with back or side cable entry options, it is ideal for many different exterior applications.





Finish:

- ☐ White RAL9002
- ☒ Black RAL9005
- ☐ Antracite RAL7016

Power: 13W 18W 28W

Kelvin: 3000K 4000K

## Technical Drawings

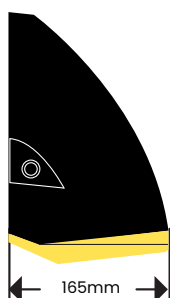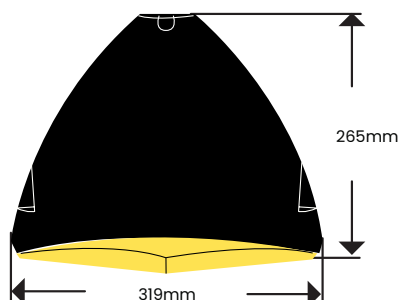

## Overview

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Applications          | Exterior                                      |
| Construction Material | Cast Aluminium                                |
| Diffuser Type         | Polycarbonate                                 |
| IP Rating             | IP65                                          |
| IK Rating             | IK10                                          |
| Mounting              | Wall mounted                                  |
| Weight (kg)           | 2.85                                          |
| Ambient Temperature   | -20°C to +45°C<br>(0°C to 40°C for emergency) |
| Warranty              | 5 years                                       |

## Luminaire Output

|                    |                            |
|--------------------|----------------------------|
| Colour Temperature | 3000K / 4000K Switchable   |
| Wattage            | 13W / 18W / 28W Switchable |
| CRI                | >80 Ra                     |
| Efficacy           | ~125 lm/W                  |
| Beam Angle         | 120°                       |
| Operating Hours    | 50,000                     |
| Macadam Ellipse    | ≤6 sdcm                    |
| L70 B50            | 70,000 hours               |

## Supply & Power

|                      |                            |
|----------------------|----------------------------|
| Voltage Range        | AC220-240V                 |
| Power Factor         | >0.90                      |
| Inrush Current       | 10A for 100µs              |
| Protection Class IEC | Class I                    |
| Driver               | Integral                   |
| Cable entry          | Back and side entry option |

Product Codes & Specifications

| Code              |                                                                                   | Lumens                            | Running Current |
|-------------------|-----------------------------------------------------------------------------------|-----------------------------------|-----------------|
| R301301/BK/CTC/SW | Flosse Wall Pack 13W/18W/28W Switchable, 3000K and 4000K Switchable In Black      | 13W<br>1711 @3000K<br>1757 @4000K | 13W<br>DC350mA  |
| R301301/AN/CTC/SW | Flosse Wall Pack 13W/18W/28W Switchable, 3000K and 4000K Switchable In Anthracite | 18W<br>2385 @3000K<br>2453@4000K  | 18W<br>DC500mA  |
| R301301/WT/CTC/SW | Flosse Wall Pack 13W/18W/28W Switchable, 3000K and 4000K Switchable In White      | 28W<br>3403 @3000K<br>3487 @4000K | 28W<br>DC725mA  |

Options

| Suffix | Option          |
|--------|-----------------|
| /WT    | White body      |
| /AN    | Anthracite body |
| /BK    | Black body      |
| /MW    | Sensor          |
| /E     | Emergency       |

Full Code Example: R301301/BK/CTC/SW Flosse Wall Pack 13W/18W/28W Switchable, 3000K and 4000K Switchable In Black

/WT



/AN



/BK

