

RICOMAN[®]

Modus Max LED Downlight INSTALLATION INSTRUCTIONS



**PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE
A COPY WITH THE END USER FOR FUTURE REFERENCE.**

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire & safety risk and take appropriate precautions.

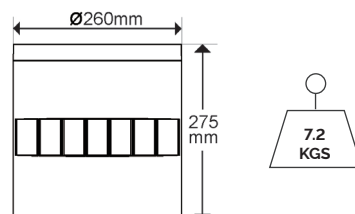
This product is a CLASS 1 Fitting and must be connected to an earth termination.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES

- Switch off the mains before commencing installation and remove the appropriate circuit fuse or lock off the Mains Circuit Board.
- The luminaire must be installed on to a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.
- Ensure there is adequate space for ventilation around the fitting.
- Ensure that all electrical connections are tight with no loose strands.
- This product is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
- Do not disassemble or amend the structure of the luminaire as this can be risky and would void your warranty.
- Before making the fixing hole(s), check that there are no obstructions hidden beneath the mounting surface, such as pipes or cables.

SPECIFICATION

Code-Wattage: R096950
/70W | /100W | /150W
Colour Temp: 3000K (/3K) | 4000K (/4K)
Power Supply: 220-240V
Power Factor: >0.95









Modus Max LED Downlight




INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf. Remove the product from the box and inspect it for any damage. If the luminaire is in a good condition, proceed with the installation.

SUSPENDING CHAIN

STEP 1  Use the suspending chain accessory.	STEP 2  Drill the holes on the ceiling.	STEP 3  Fix the base of the chain on the ceiling with screws.
STEP 4  Luminaire → Connect the mains power to the luminaire.	STEP 5  Twist Luminaire ring Open the end of the chain by twisting and snap it into the luminaire ring.	STEP 6 Installation is complete. 

SUSPENDING ROD

STEP 1  Use the suspending rod accessory.	STEP 2  Pass the mains power through the rod and secure it on the ceiling.	STEP 3  Luminaire Connect the 220V power cord to the terminal.
	STEP 4  Screw the luminaire onto the rod.	STEP 5 Installation is complete. 



DISPOSAL OF ELECTRONIC EQUIPMENT WEEE DIRECTIVE 2002/96/EC

This product falls within the scope of the Waste Electrical & Electronic Equipment (WEEE), which means the product should not be disposed of as normal household waste. Ensure that this luminaire and lamp is disposed of in accordance with the WEEE Directive. Contact a local Council Waste Dept. Local Amenity Site, or the Environment Agency for further information. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.



WARRANTY

This product is in warranty in the UK for a period of **5 year** from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.