

# Z10 Emergency Product Datasheet

## Remote Control Emergency Kit

### Product Data

|                  |              |
|------------------|--------------|
| Warranty         | 5 years      |
| Applications     | Interior     |
| Certification(s) | UKCA, CE, CB |

### Physical Data

|                       |               |
|-----------------------|---------------|
| Construction Material | Polycarbonate |
| Unit Weight (kg)      | 0.40 Kg       |

### Electrical Data

|                           |              |
|---------------------------|--------------|
| Emergency Power           | 3W           |
| Standby Power             | <0.8W        |
| Voltage Range             | AC220-240VAC |
| Max.output Voltage        | 55 Vdc       |
| LED Forward Voltage Range | 10-50 Vdc    |
| Protection Class IEC      | Class II     |


### Performance Data

|                          |                                            |
|--------------------------|--------------------------------------------|
| Max. Ambient Temperature | 25°C                                       |
| Max.Battery Temperature  | 60°C                                       |
| Battery                  | 18650 * Li-ion                             |
| Battery Duration         | 3 hrs                                      |
| Battery Charging Time    | <16 hrs (integral)<br>Up to 8 hrs (remote) |

### List of RICOMAN compatible luminaires

| REMOTE                                                                                                                                                                                                                                                                                                                                                                             | INTEGRAL                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>R10-03E(SM)/Z10</b> <ul style="list-style-type: none"> <li>Centorio Tunable Downlight</li> <li>Venus Downlight</li> <li>Capella Downlight</li> <li>Carina Downlight</li> <li>Ultra-Slim Downlights</li> <li>Endor Downlight (only &gt;12W versions)</li> <li>Sirius Downlight</li> <li>Protium Downlight</li> <li>Saturn Downlight</li> <li>Vela Recessed Wallwasher</li> </ul> | <b>R10-03E-Z10</b> <ul style="list-style-type: none"> <li>MiniMoon Pendant</li> <li>Estrella Linear</li> <li>Estrella Pro Linear</li> <li>Academy Curved Linear</li> <li>Alphard Round Bulkhead</li> <li>Alphard Square Bulkhead</li> <li>Salus ExitBulkhead</li> <li>Iris Bulkhead</li> <li>Victus Bulkhead</li> <li>Trident Anti-Corrosive</li> <li>Orion Batten</li> </ul> |
| <b>R10-03E(DC)/Z10</b> <ul style="list-style-type: none"> <li>Pure Panel</li> <li>Core Plus &amp; UGR Panel</li> <li>Verve Panel</li> <li>Aquavance IP66 Panel</li> <li>Fusion</li> <li>Luna</li> <li>O2 Modular</li> </ul>                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                               |

### Remote or integral option with optional self-test function

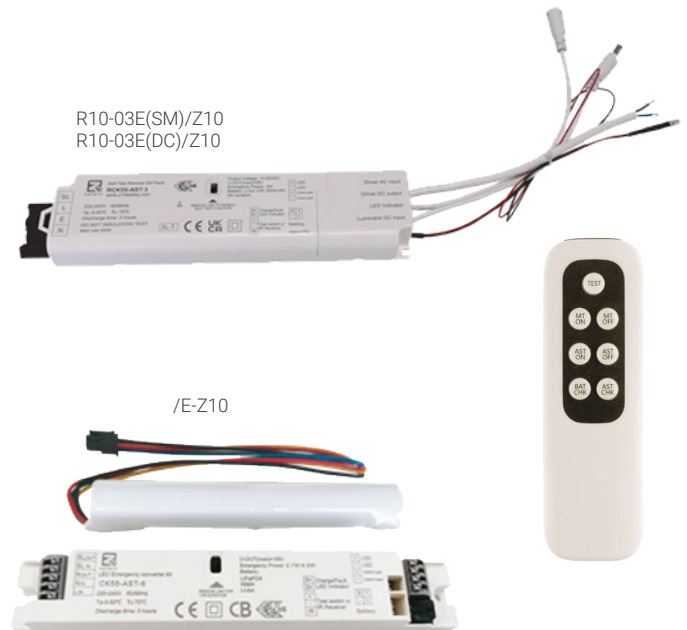

### Part Codes

|                            | Option                               |
|----------------------------|--------------------------------------|
| R10-03E(SM)/Z10            | Remote emergency pack (downlights)   |
| R10-03E(DC)/Z10            | Remote emergency pack (panel lights) |
| /E-Z10 (as product suffix) | Integral emergency pack              |
| R10-Z10                    | Emergency remote control             |

### Dimensions (mm)

