

RICOMAN[®]

NEBULA SUSPENDED LED PANEL LIGHT

INSTALLATION INSTRUCTIONS



PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE A COPY WITH THE END USER FOR FUTURE REFERENCE.

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire and safety risks and take appropriate precautions.

This product is a CLASS I Fitting and must be connected to earth termination.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES


- Do not disassemble or amend the structure of the luminaire as this can be dangerous and it would void your warranty.
- Electrostatic Sensitive Devices (ESD): to be handled with precaution to avoid ESD
- The luminaire must be installed on a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.
- The luminaire must not be installed above hot objects such as ovens to avoid damage to the fitting.
- Ensure that ALL electrical connections are tight with no loose strands.

AFTER INSTALLATION & MAINTENANCE

- Avoid looking directly to the LEDs to avoid dazzling and eye strain.
- Do not use chemicals and abrasives to clean this product. Wipe with a soft cloth only to avoid scratching.

SPECIFICATION & DIMENSIONS

Product Code: R101801
Wattage: 60W
Power Supply: AC220-240V
Power Factor: >0.90
Lumens: 6136 (3000K) | 6482 (4000K)
CCT: 3000K | 4000K
CRI: >80Ra
Driver: built-in
Body: aluminium/glass

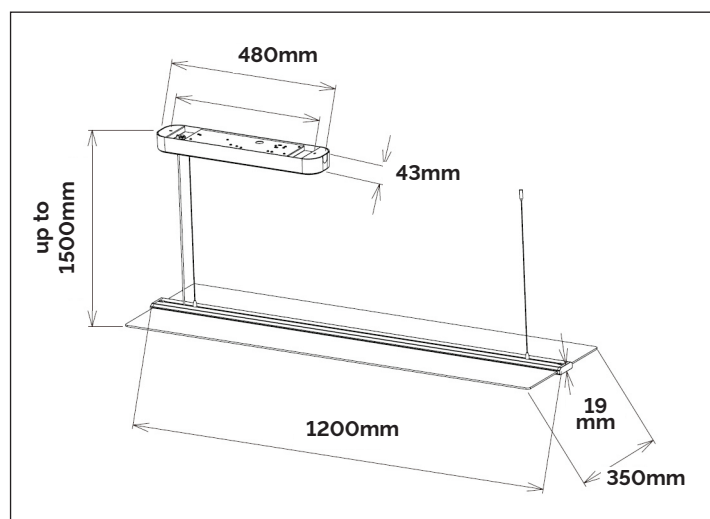


Nebula Suspended LED Panel Light

INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.


STEP 1

Open the box and inspect the mounting kit.




STEP 4

Connect the wires, rotate the steel wire end part and fix it with the bracket.

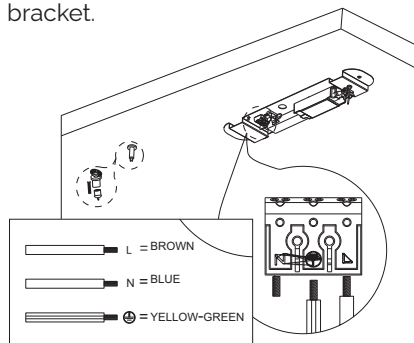


STEP 7

Fix the suspension wire, connect male and female plug, and cover the mounting box.




STEP 2

Turn off the power and knock the plastic anchor into the ceiling.




STEP 5

Fix the suspension wires on the panel.

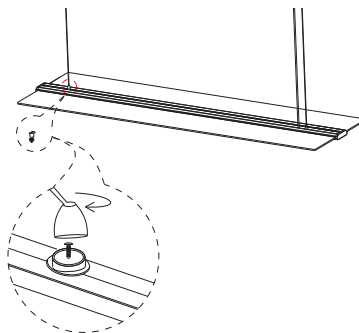


STEP 8

Adjust the wires' length with cable clip.



STEP 3


Open the driver box, fasten the bracket and secure the box on the ceiling.

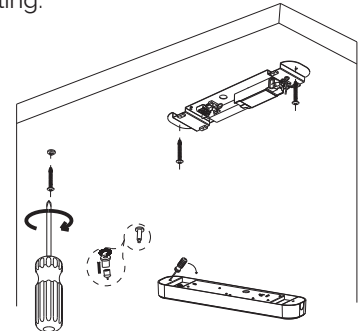

STEP 6


Only if connecting two panels:

Remove end cap screws, then align the connector with screw holes.



STEP 9

Turn the power back on and test.

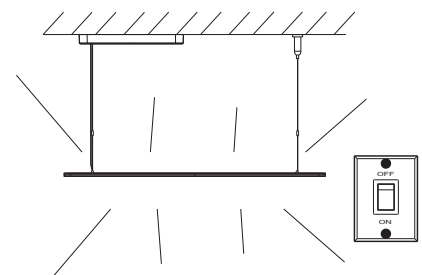

ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.