


RICOMAN[®]

RE36 Panel Suspension Kit INSTALLATION STEPS


STEP 1

Ensure power is turned off. Drill six 6mm holes into the ceiling for the two suspension points. Insert wall plugs into holes.




STEP 2

Insert the M4 screw into the ceiling suspension fixture and screw into the raw plug that sits in the ceiling (X2).




STEP 3

Screw the four fixing points into the panel




STEP 4

Secure the suspension kit onto the four panel fixing points.

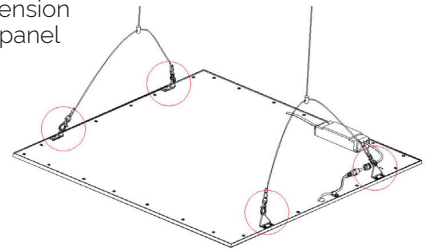


STEP 5

Slide the suspension wire through the fixing point to ensure the panel is level.




STEP 6

Slide the suspension wire through the ceiling suspension cap and screw the ceiling suspension cap into the ceiling point.



STEP 7

Adjust the suspension wire to the desired lengths. Then, installation is complete. Return the power on and test.




Core UGR LED Fitting

INSTALLATION STEPS


Before following these steps please ensure you have read and adhered to the guidelines and information overleaf.

LAY IN - GRID CEILINGS


STEP 1




STEP 2



STEP 3




STEP 4




SUSPENDED

STEP 1


[NOTE: Use the **RE36** mounting kit]

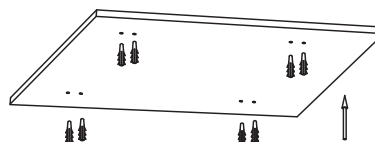


STEP 2

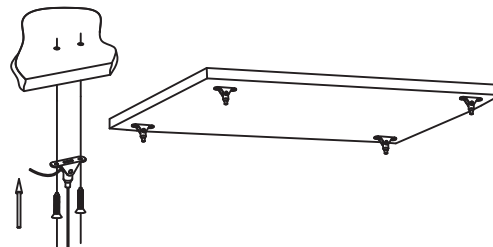

STEP 3

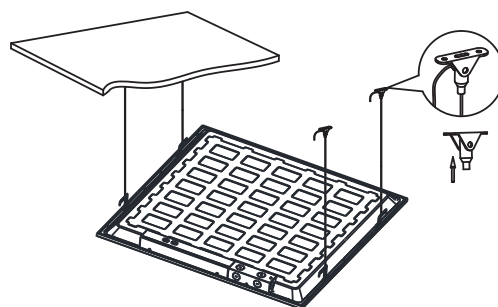

STEP 4



ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 5 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.